US011482783B2

(12) **United States Patent**
Schneider et al.

(10) **Patent No.: US 11,482,783 B2**
(45) **Date of Patent: *Oct. 25, 2022**

(54) **ANTENNA ASSEMBLIES WITH TAPERED LOOP ANTENNA ELEMENTS**

(71) Applicant: **Antennas Direct, Inc.**, Ellisville, MO (US)

(72) Inventors: **Richard E. Schneider**, Wildwood, MO (US); **John Edwin Ross, III**, Moab, UT (US)

(73) Assignee: **Antennas Direct, Inc.**, Ellisville, MO (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **17/332,541**

(22) Filed: **May 27, 2021**

(65) **Prior Publication Data**

US 2021/0288406 A1 Sep. 16, 2021

Related U.S. Application Data

(63) Continuation of application No. 16/840,850, filed on Apr. 6, 2020, now Pat. No. 11,024,968, which is a continuation of application No. 15/685,749, filed on Aug. 24, 2017, now Pat. No. 10,615,501, which is a continuation of application No. 14/308,422, filed on Jun. 18, 2014, now abandoned, which is a continuation-in-part of application No. 29/430,632, filed on Aug. 28, 2012, now abandoned, which is a continuation-in-part of application No. 29/376,791, filed on Oct. 12, 2010, now Pat. No. Des. 666,178, which is a continuation-in-part of application No. 13/759,750, filed on Feb. 5, 2013, now Pat. No.

(Continued)

(51) **Int. Cl.**

H01Q 7/00	(2006.01)
H01Q 7/02	(2006.01)
H01Q 1/12	(2006.01)
H01Q 19/10	(2006.01)

(52) **U.S. Cl.**

CPC ***H01Q 7/00*** (2013.01); *H01Q 1/1207* (2013.01); *H01Q 1/1271* (2013.01); *H01Q 7/02* (2013.01); *H01Q 19/10* (2013.01)

(58) **Field of Classification Search**

CPC .. H01Q 1/1207; H01Q 1/15; H01Q 7/00–005; H01Q 9/265; H01Q 19/10

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,060,098 A 11/1936 Norman
2,220,008 A 10/1940 Woodward et al.

(Continued)

OTHER PUBLICATIONS


U.S. Appl. No. 16/840,850, filed Apr. 6, 2020.
U.S. Appl. No. 15/685,749, filed Aug. 24, 2017.
U.S. Appl. No. 14/308,422, filed Jun. 18, 2014.

Primary Examiner — Andrea Lindgren Baltzell
Assistant Examiner — Amal Patel
(74) *Attorney, Agent, or Firm* — Harness, Dickey & Pierce, P.L.C.; Anthony G. Fussner

(57) **ABSTRACT**

According to various aspects, exemplary embodiments are provided of antenna assemblies. In an exemplary embodiment, an antenna assembly generally includes at least one antenna element configured to be operable for receiving high definition television signals.

34 Claims, 56 Drawing Sheets

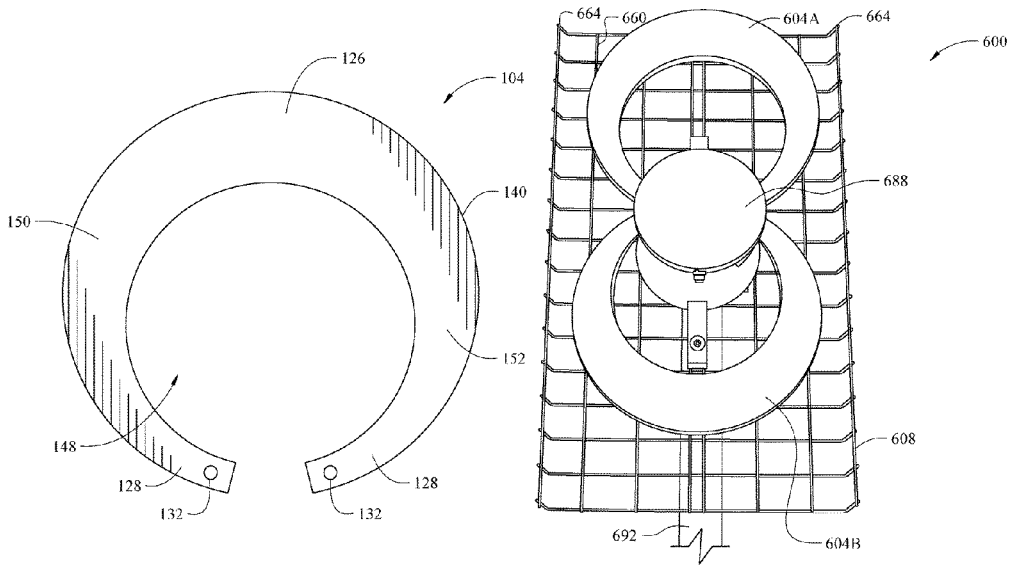

Related U.S. Application Data

8,994,600, which is a continuation-in-part of application No. 12/606,636, filed on Oct. 27, 2009, now Pat. No. 8,368,607, which is a continuation-in-part of application No. 12/050,133, filed on Mar. 17, 2008, now Pat. No. 7,609,222, which is a continuation-in-part of application No. 29/304,423, filed on Feb. 29, 2008, now Pat. No. Des. 598,433, and a continuation-in-part of application No. 12/040,464, filed on Feb. 29, 2008, now Pat. No. 7,839,347, which is a continuation-in-part of application No. 29/305,294, filed on Mar. 17, 2008, now Pat. No. Des. 604,276, which is a continuation-in-part of application No. 12/040,464, filed on Feb. 29, 2008, now Pat. No. 7,839,347, which is a continuation of application No. 12/050,133, filed on Mar. 17, 2008, now Pat. No. 7,609,222, and a continuation-in-part of application No. PCT/US2008/061908, filed on Apr. 29, 2008, which is a continuation-in-part of application No. 12/040,464, filed on Feb. 29, 2008, now Pat. No. 7,839,347, which is a continuation-in-part of application No. 12/050,133, filed on Mar. 17, 2008, now Pat. No. 7,609,222.

(60) Provisional application No. 62/002,503, filed on May 23, 2014, provisional application No. 60/992,331, filed on Dec. 5, 2007, provisional application No. 61/034,431, filed on Mar. 6, 2008.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,437,251	A	3/1948	Frische et al.	
2,480,155	A	8/1949	Masters	
2,589,578	A	3/1952	Sabins	
D170,203	S	8/1953	Leonard	
D171,560	S	2/1954	Ritter	
D177,200	S	3/1956	Valiulis	
D179,111	S	11/1956	Ballan	
2,821,710	A	1/1958	Hale	
3,015,101	A	12/1961	Turner et al.	
3,123,826	A	3/1964	Durham	
3,161,975	A	12/1964	McMillan	
3,239,838	A	3/1966	Kelleher	
3,261,019	A	7/1966	Lundy	
3,273,158	A	9/1966	Fouts et al.	
D209,402	S	11/1967	Burlingame	
D211,025	S	5/1968	Callaghan	
3,434,145	A	3/1969	Wells	
3,521,284	A	7/1970	Strom et al.	
3,560,983	A	2/1971	Willie et al.	
3,587,105	A	6/1971	Neilson	
3,721,990	A	3/1973	Gibson et al.	
3,739,388	A	6/1973	Callaghan	
3,828,867	A	8/1974	Elwood	
3,971,031	A	7/1976	Burke	
4,183,027	A	1/1980	Ehrenspeck	
4,184,163	A	1/1980	Woodward	
4,418,427	A	11/1983	Muterspaugh	
D310,671	S	9/1990	Weiss	
4,987,424	A	1/1991	Tamura et al.	
D318,673	S	7/1991	Terk	
D327,690	S	7/1992	Ogawa et al.	
D332,262	S	1/1993	Borchardt	
5,280,645	A	1/1994	Nguyen et al.	
D344,731	S	3/1994	Witzky	
5,313,218	A	5/1994	Busking	
5,943,025	A	8/1999	Benham et al.	
D414,495	S	9/1999	Heiligenstein et al.	
5,959,586	A	9/1999	Benham et al.	
6,002,371	A *	12/1999	Mittler	H01Q 1/242 343/702
D421,610	S	3/2000	Ghalebi	
6,054,963	A	4/2000	Muterspaugh	
6,239,764	B1	5/2001	Timofeev et al.	
D449,593	S	10/2001	Schultz	
6,590,541	B1	7/2003	Schultze	
6,593,886	B2 *	7/2003	Schantz	H01Q 1/38 343/866
D480,714	S	10/2003	Wang	
6,680,708	B2	1/2004	Yamaki	
D501,468	S	2/2005	Wang	
6,885,352	B2	4/2005	Lee et al.	
6,917,793	B2	7/2005	Wang	
6,922,179	B2	7/2005	McCollum	
7,091,925	B1 *	8/2006	Wang	H01Q 9/265 343/866
7,126,556	B1	10/2006	Wang	
7,209,089	B2	4/2007	Schantz	
D544,471	S	6/2007	Wang	
7,239,290	B2	7/2007	Poilasne et al.	
7,245,266	B1	7/2007	Szente et al.	
D558,189	S	12/2007	Inoue	
D581,931	S	12/2008	Pine	
D585,883	S	2/2009	Kaneko	
D598,433	S	8/2009	Schneider et al.	
D598,434	S	8/2009	Schneider et al.	
7,609,222	B2	10/2009	Schneider et al.	
D604,276	S	11/2009	Schneider et al.	
D611,460	S	3/2010	Chao	
7,693,570	B2	4/2010	Green et al.	
D624,531	S	9/2010	Fleck et al.	
7,839,347	B2	11/2010	Schneider et al.	
7,839,351	B2	11/2010	Schadler et al.	
7,898,496	B2	3/2011	Olsen et al.	
7,936,311	B2	5/2011	Rowser et al.	
7,990,335	B2	8/2011	Schneider et al.	
8,144,069	B2	3/2012	Sadowski et al.	
8,174,457	B1	5/2012	Lam	
D666,178	S	8/2012	Schneider et al.	
8,368,607	B2	2/2013	Schneider et al.	
8,736,500	B1	5/2014	Lam	
8,994,600	B2	3/2015	Schneider et al.	
D837,769	S	1/2019	Yang	
D838,697	S	1/2019	Yang	
D847,798	S	5/2019	Yang	
D849,722	S	5/2019	Yang	
D850,425	S	6/2019	Yang	
D867,347	S	11/2019	Ross, III et al.	
D872,714	S	1/2020	Yang	
10,615,501	B2 *	4/2020	Schneider	H01Q 7/00
11,024,968	B2 *	6/2021	Schneider	H01Q 7/00
2002/0158798	A1	10/2002	Chiang et al.	
2003/0071757	A1	4/2003	Yamaki	
2004/0090379	A1	5/2004	Fourdeux et al.	
2004/0090385	A1	5/2004	Green	
2004/0113841	A1	6/2004	Louzir et al.	
2004/0217912	A1	11/2004	Mohammadian	
2005/0088342	A1	4/2005	Parsche	
2005/0162332	A1	7/2005	Schantz	
2005/0259023	A1	11/2005	Wang	
2005/0280582	A1	12/2005	Powell et al.	
2006/0033665	A1	2/2006	Yang	
2006/0055618	A1	3/2006	Poilasne et al.	
2006/0077115	A1	4/2006	Oh et al.	
2006/0103577	A1	5/2006	Lee	
2006/0164304	A1	7/2006	Huang et al.	
2007/0069955	A1	3/2007	McCorkle	
2007/0200769	A1	8/2007	Nakano et al.	
2008/0040464	A1	2/2008	Chia	
2008/0094291	A1	4/2008	Bystrom et al.	
2008/0211720	A1	9/2008	Hansen	
2008/0258980	A1	10/2008	Chen et al.	
2008/0291345	A1	11/2008	Schneider	
2009/0058732	A1	3/2009	Nakano et al.	
2009/0073067	A1	3/2009	Soler Castany et al.	
2009/0146899	A1	6/2009	Schneider et al.	
2010/0085269	A1	4/2010	Sadowski et al.	
2014/0292597	A1	10/2014	Schneider et al.	

* cited by examiner

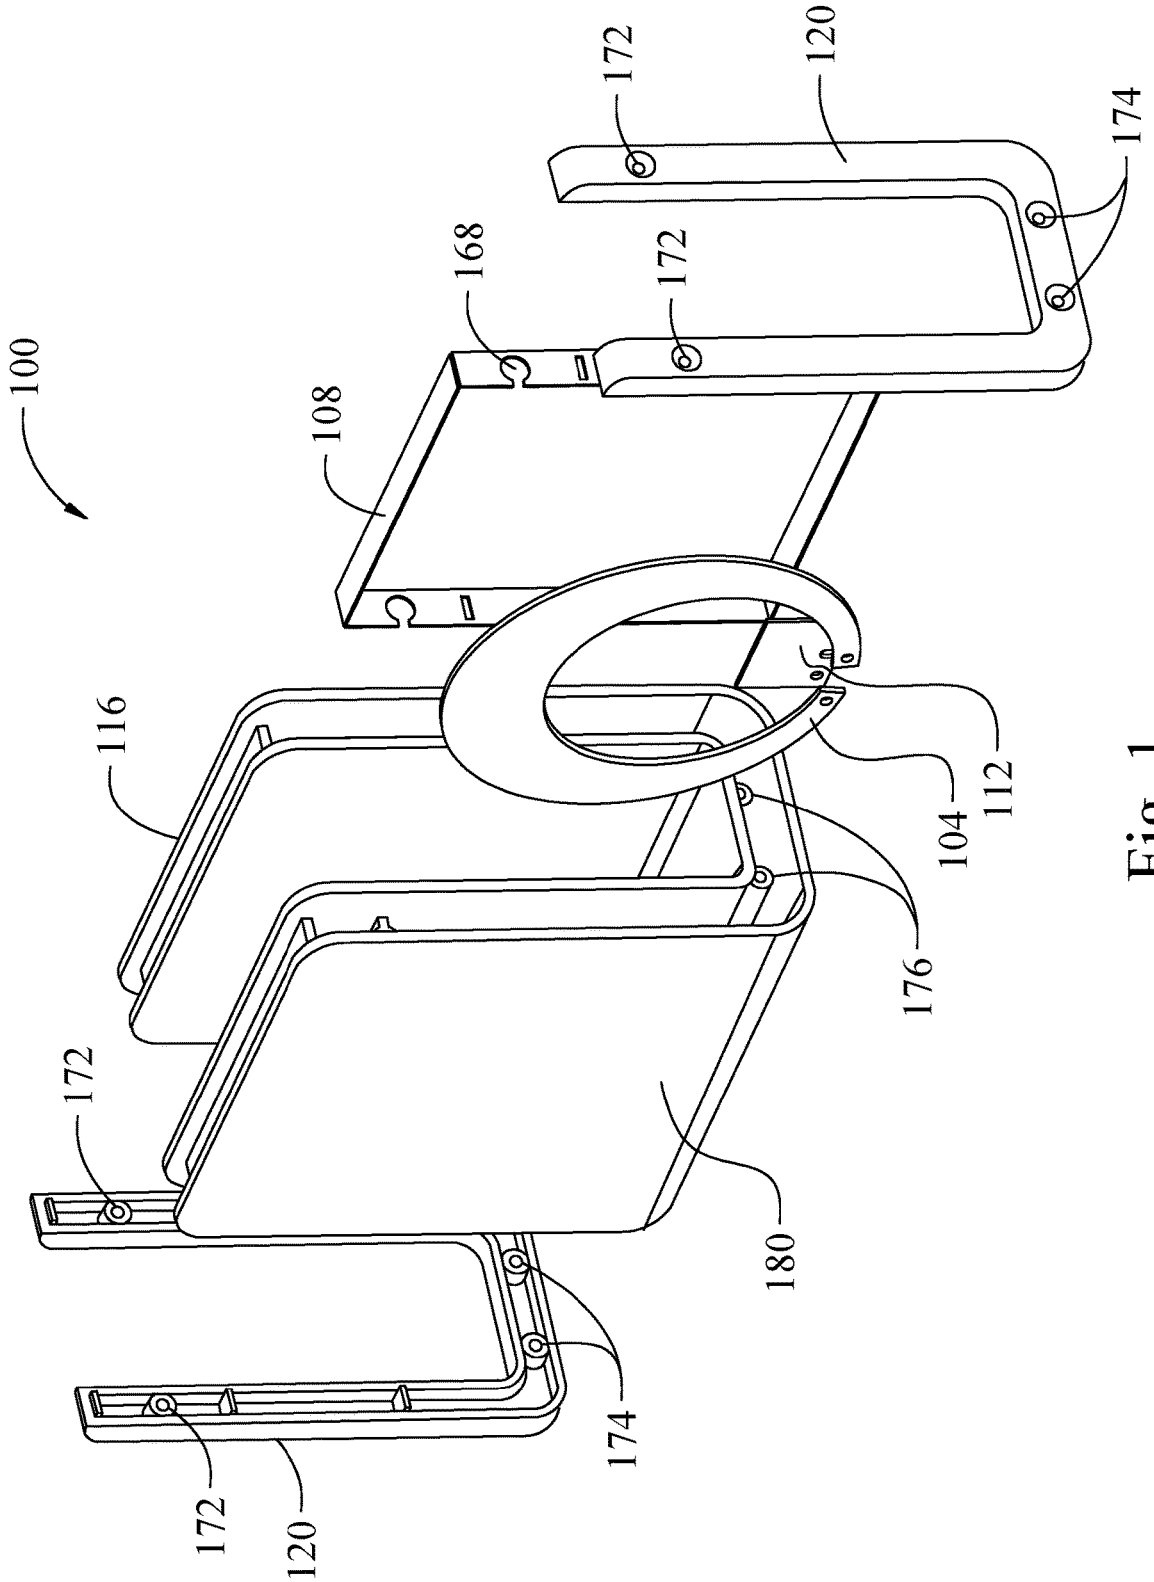


Fig. 1

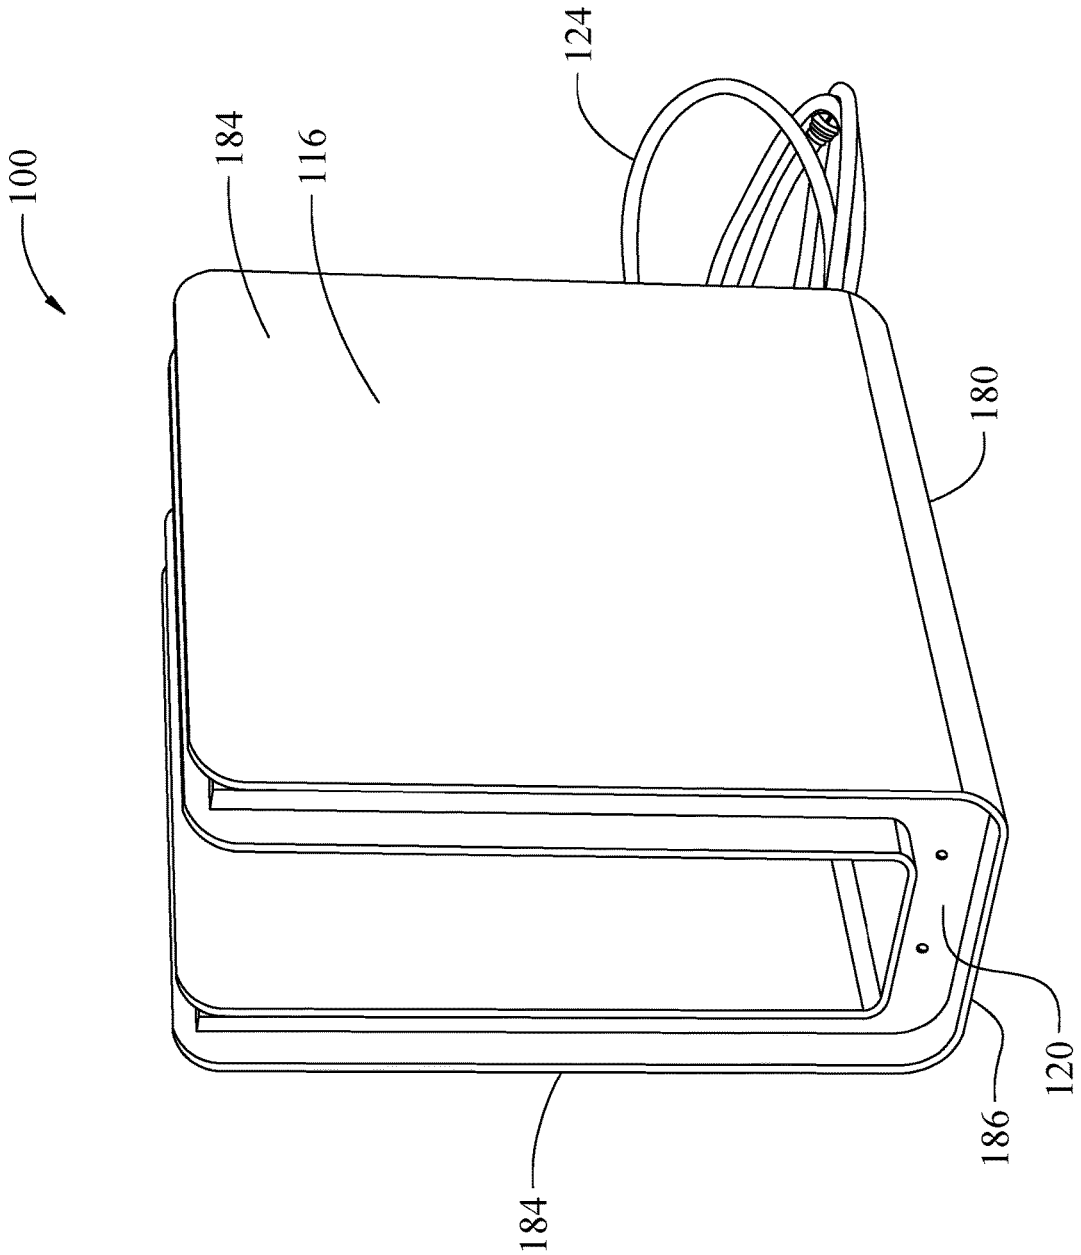


Fig. 2

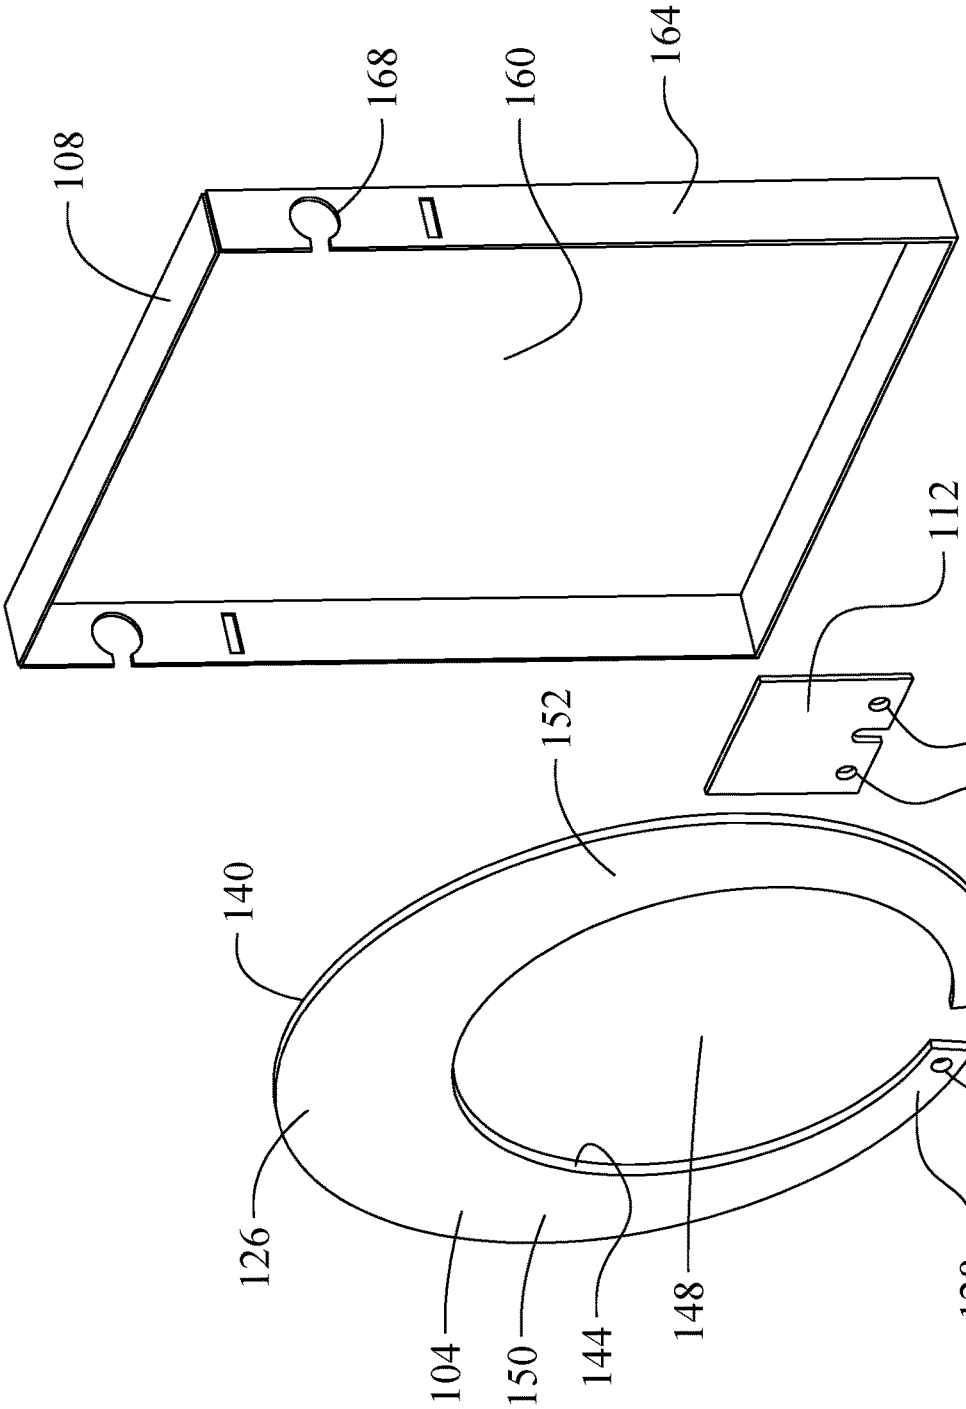


Fig. 3

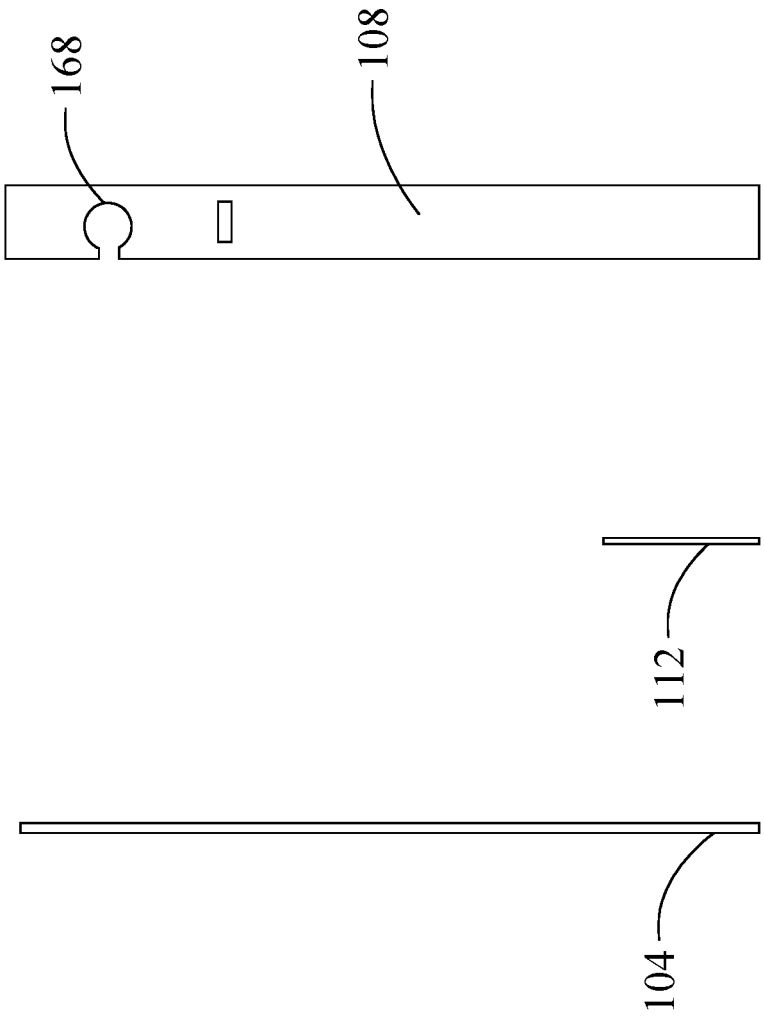


Fig. 4

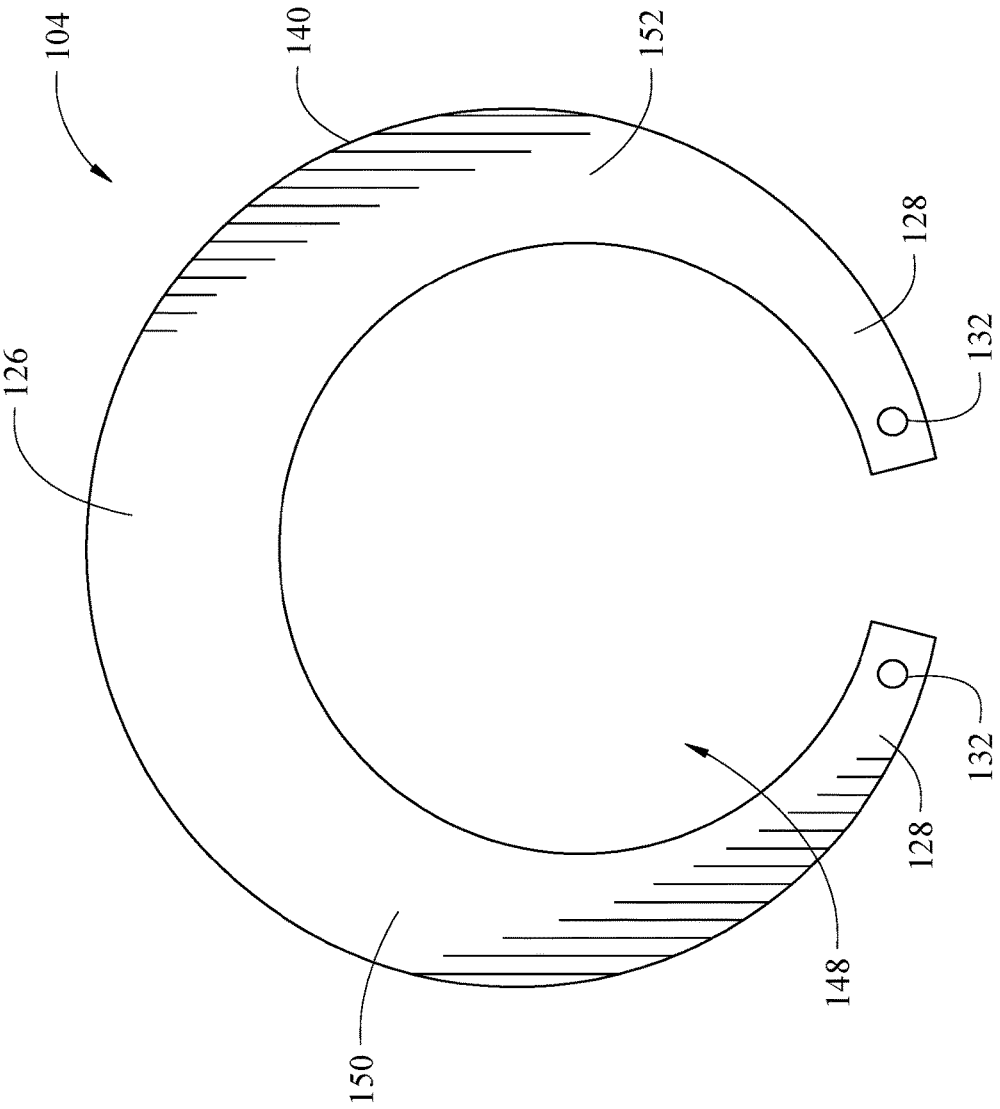


Fig. 5

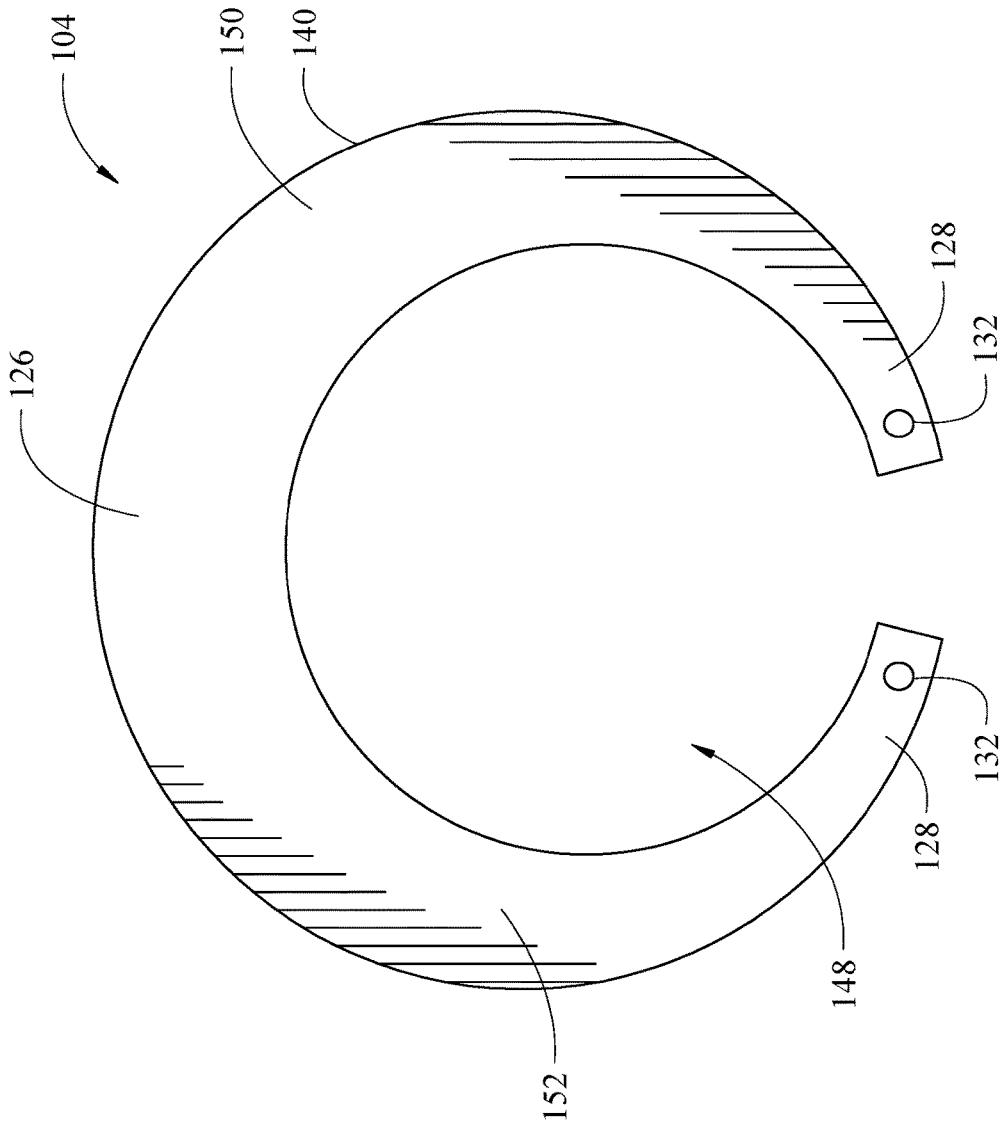


Fig. 6

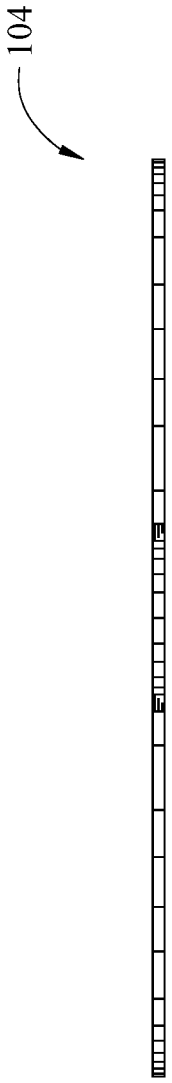


Fig. 7

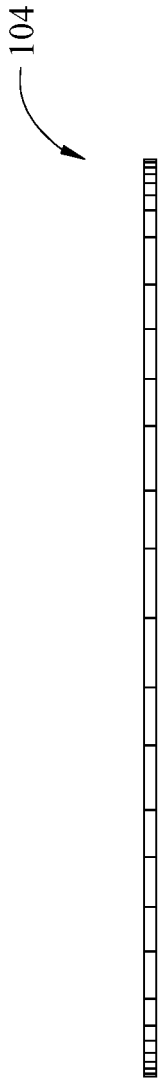


Fig. 8

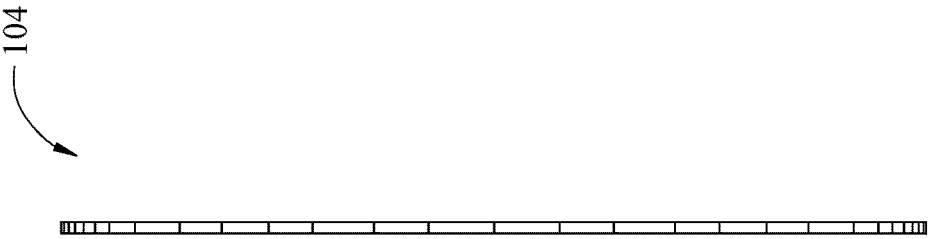


Fig. 10

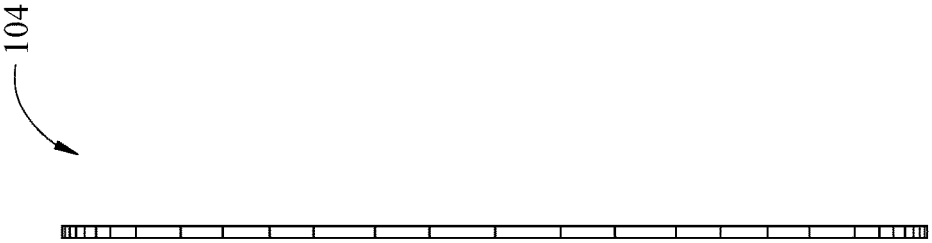


Fig. 9

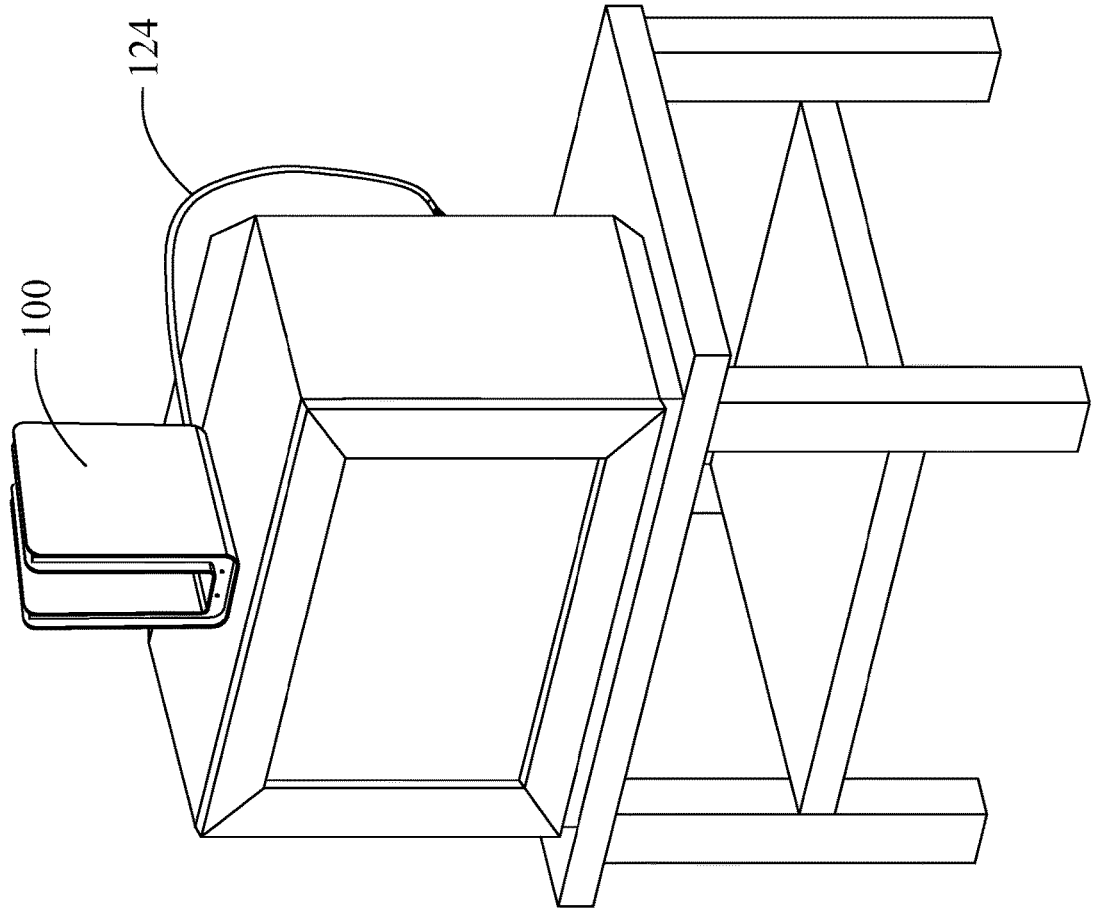


Fig. 11

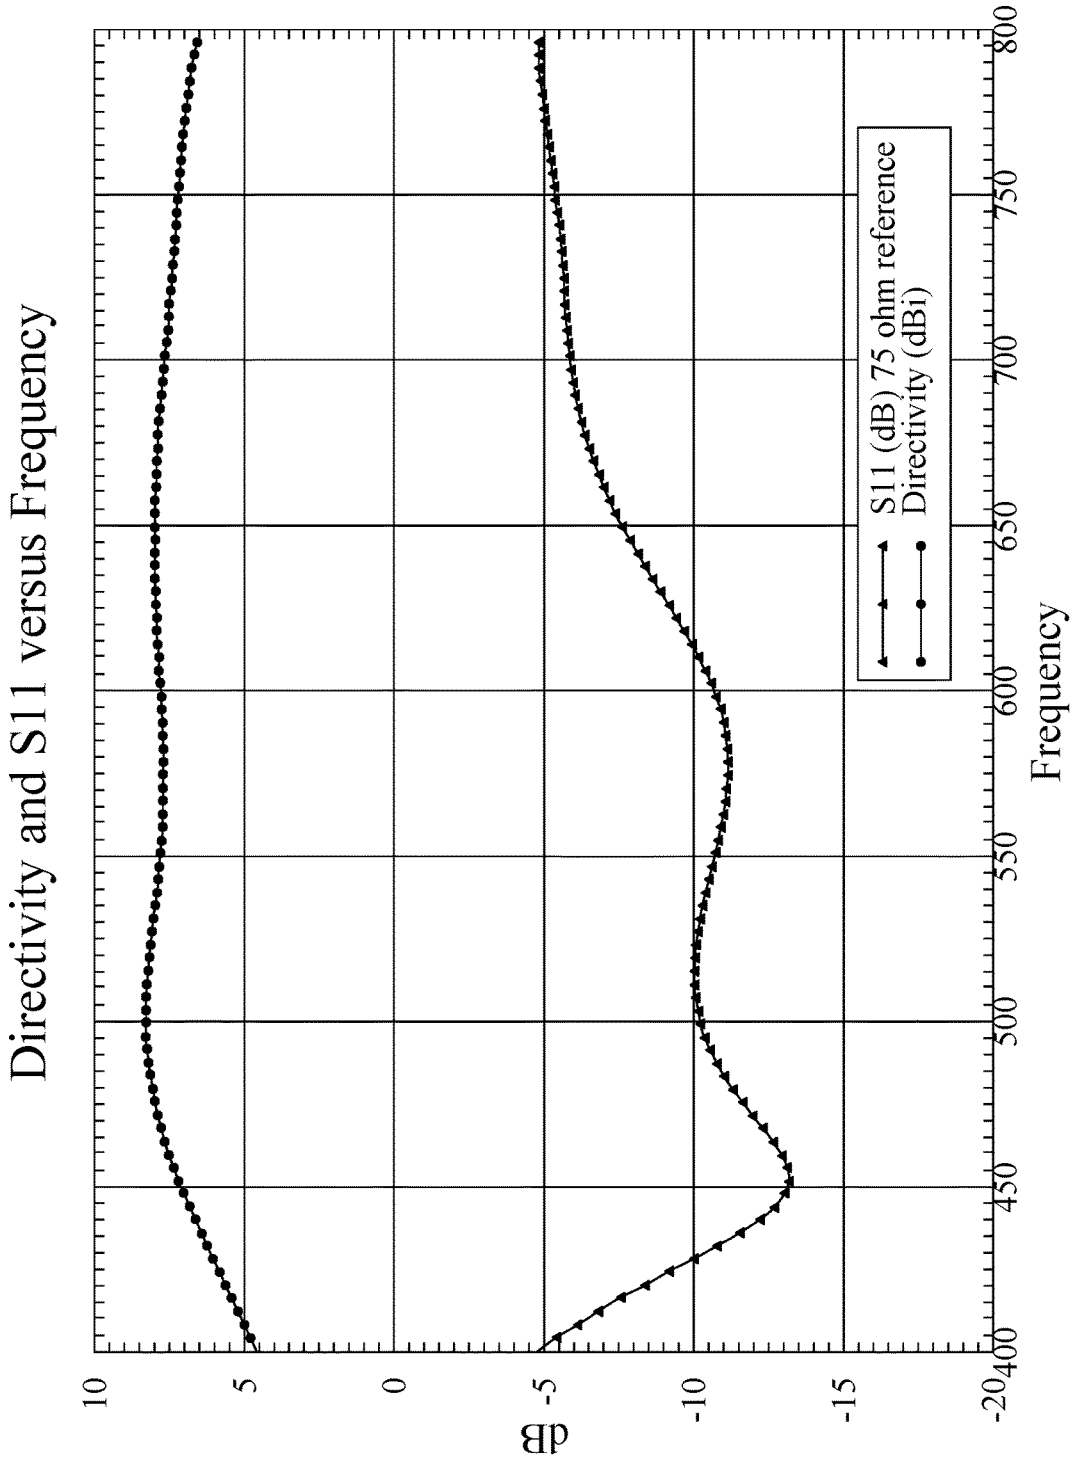

Directivity and S11 versus Frequency
dB
10
5
0
-5
-10
-15
-20
400
450
500
550
600
650
700
750
800
Frequency
S11 (dB) 75 ohm reference
Directivity (dBi)

Fig. 12

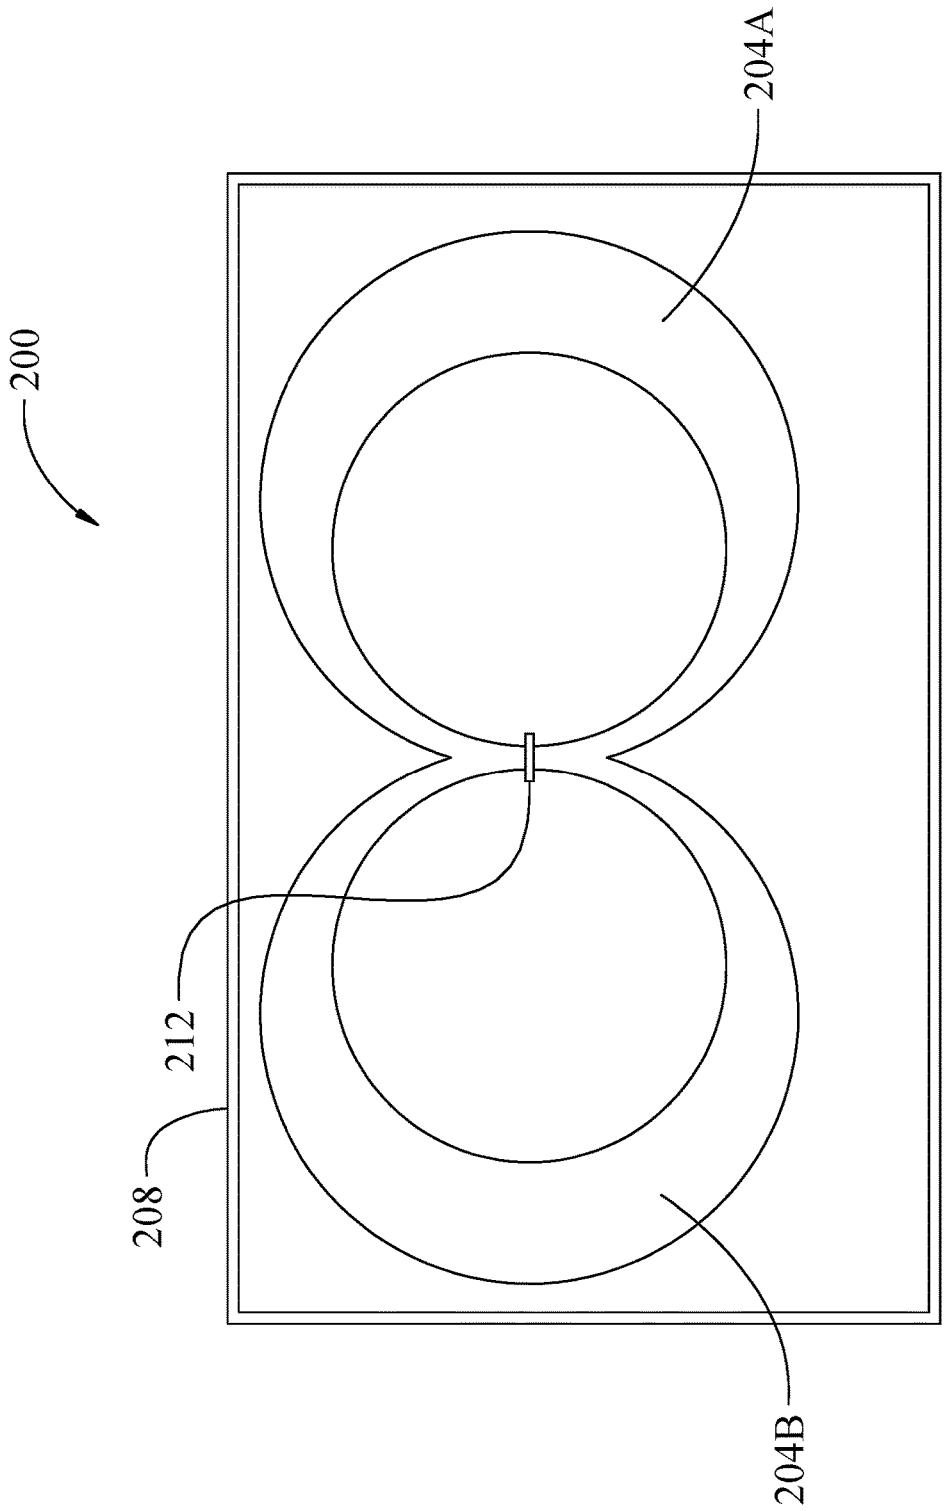


Fig. 13

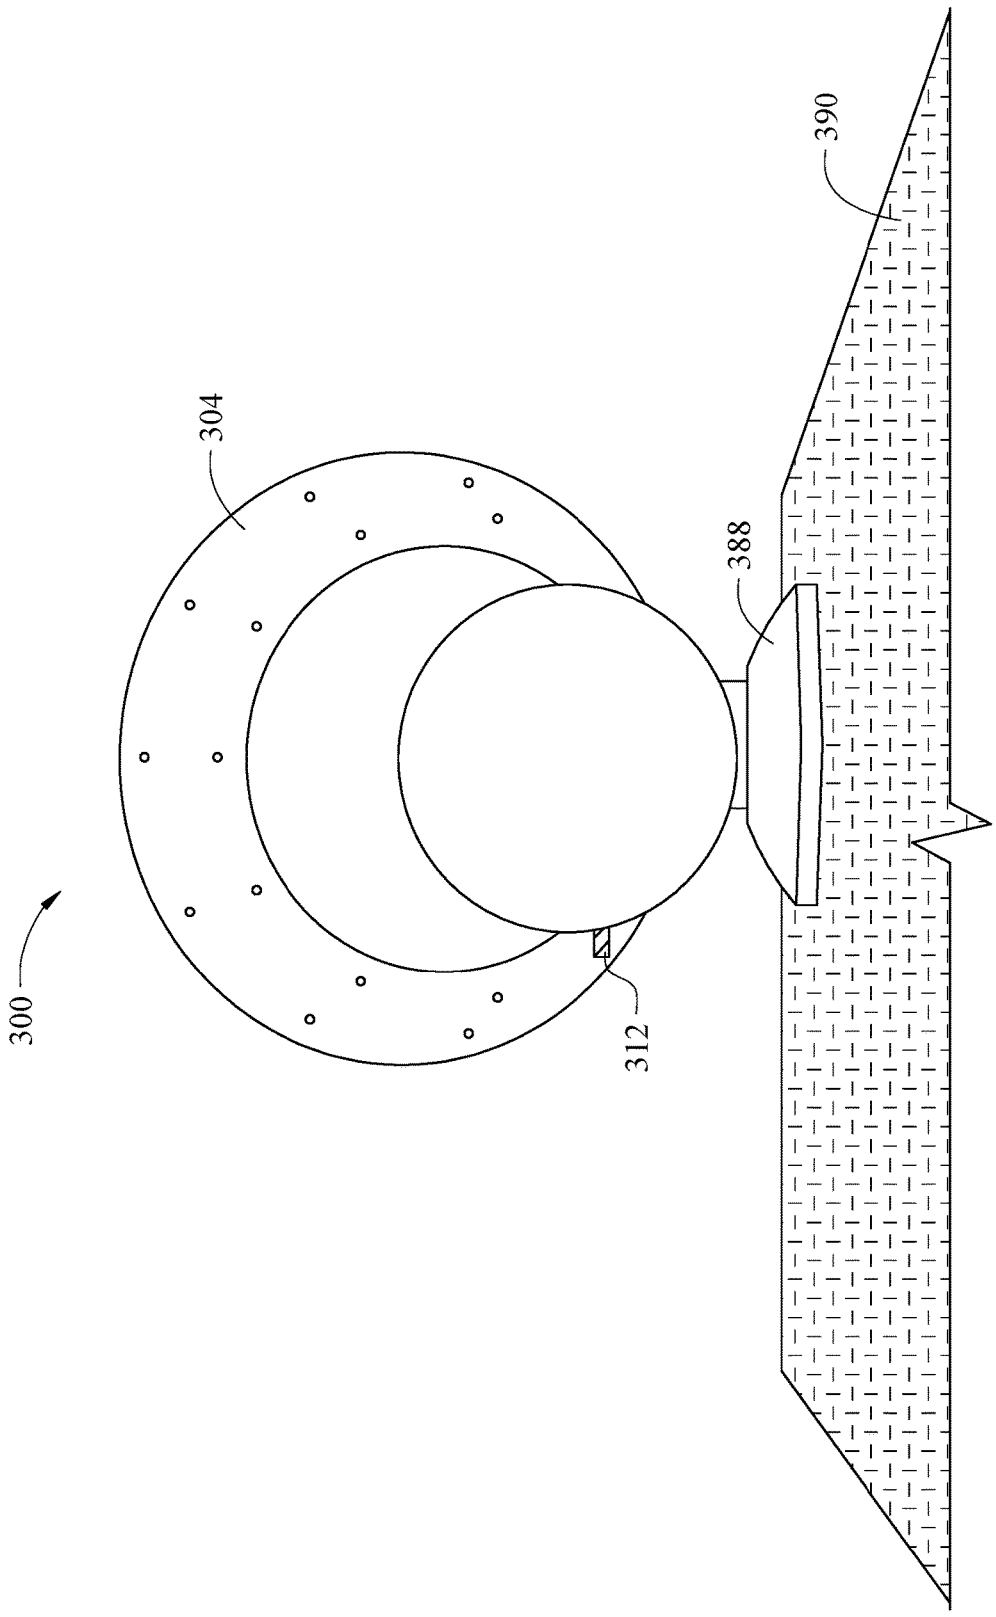


Fig. 14

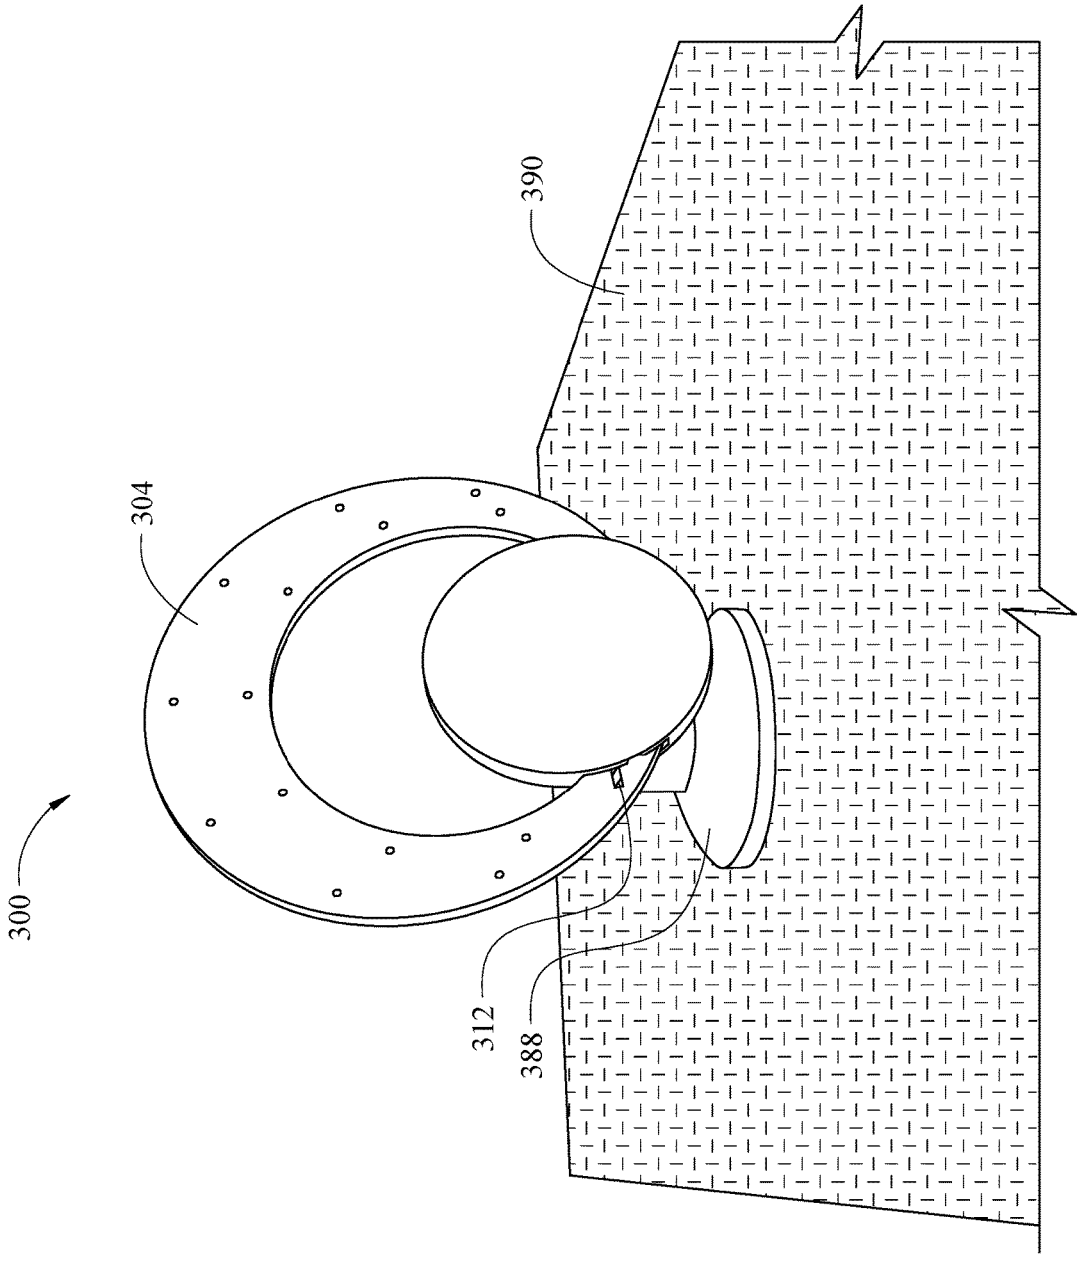


Fig. 15

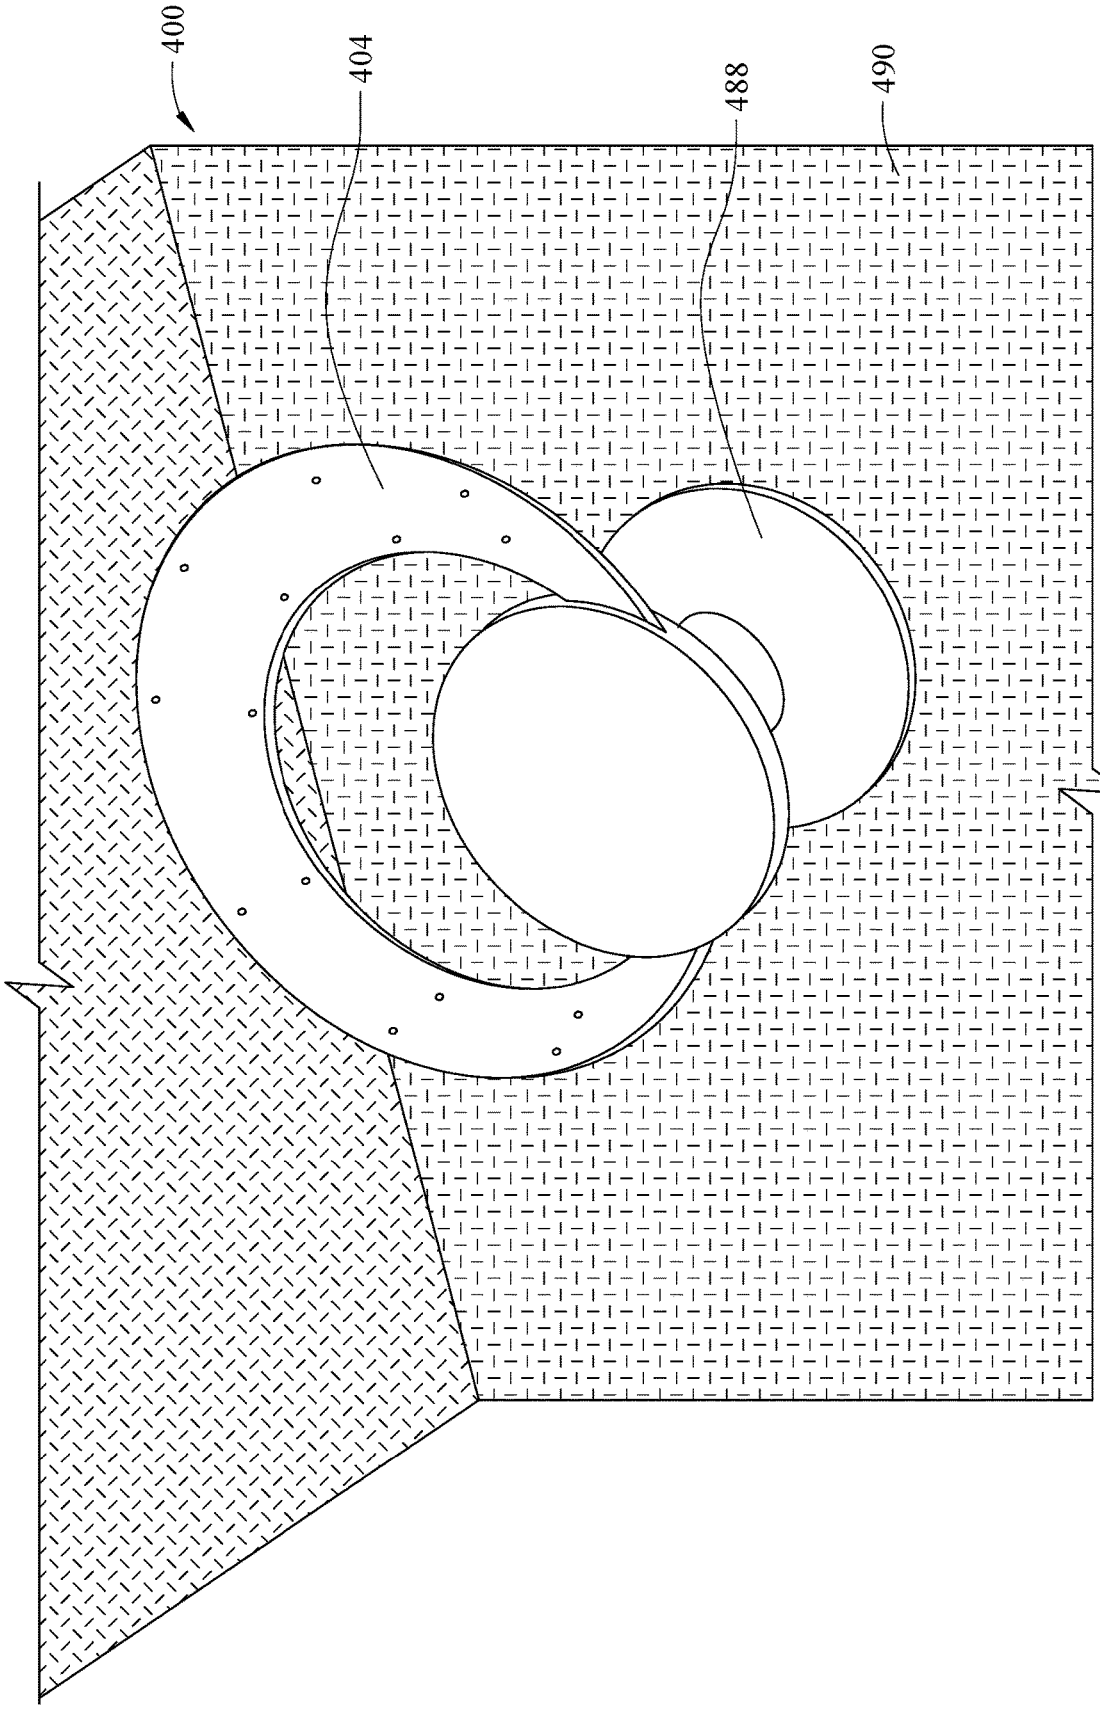


Fig. 16

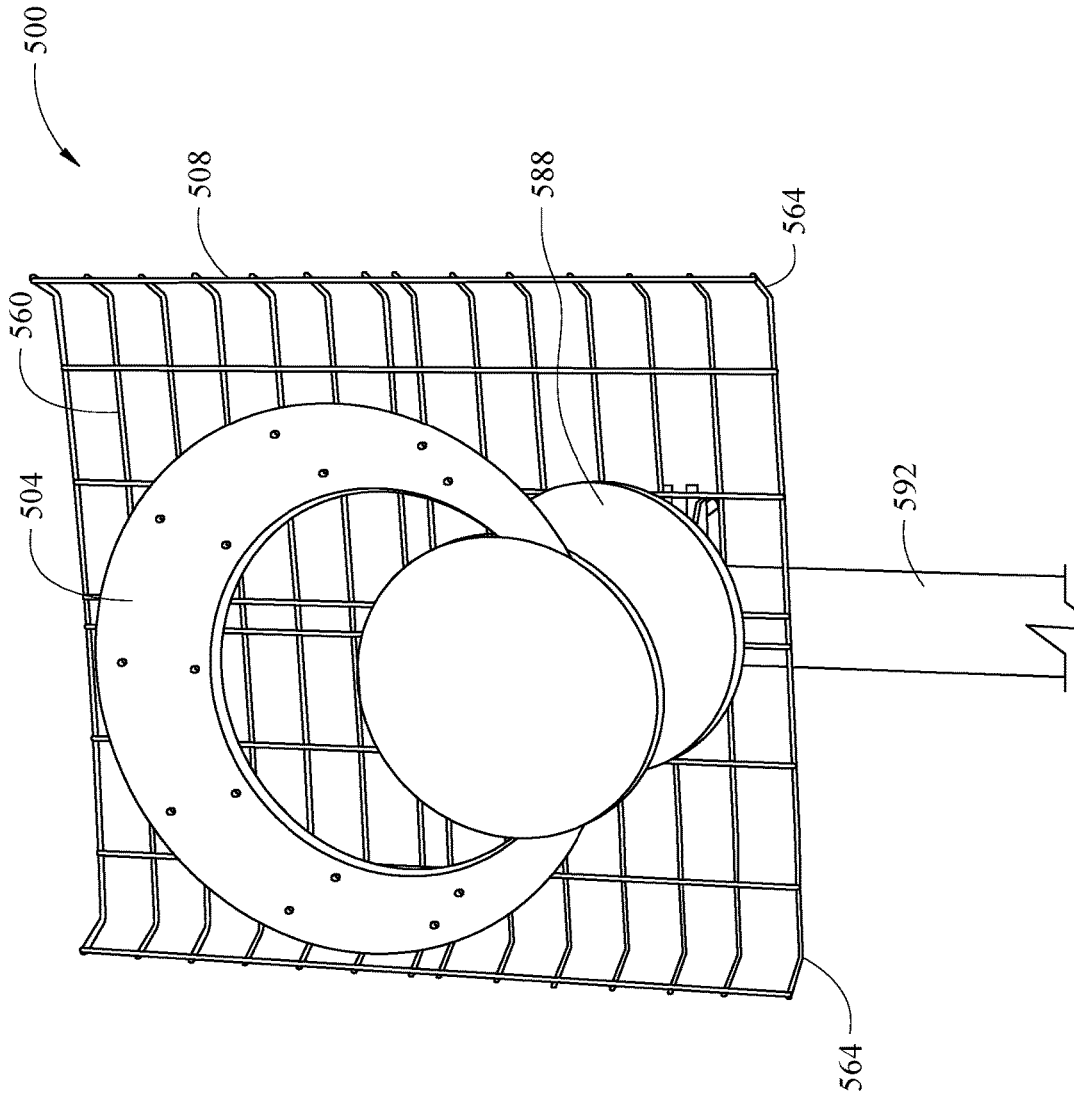


Fig. 17

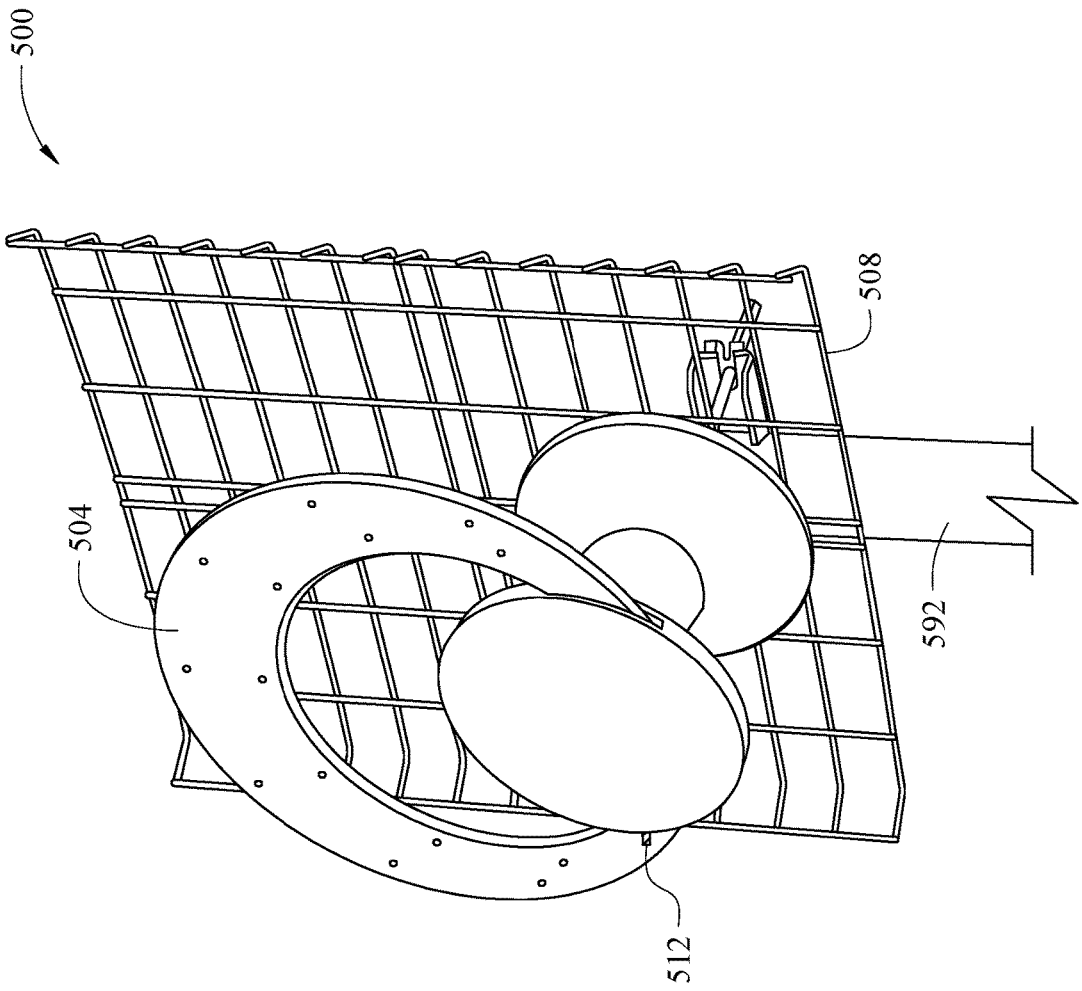


Fig. 18

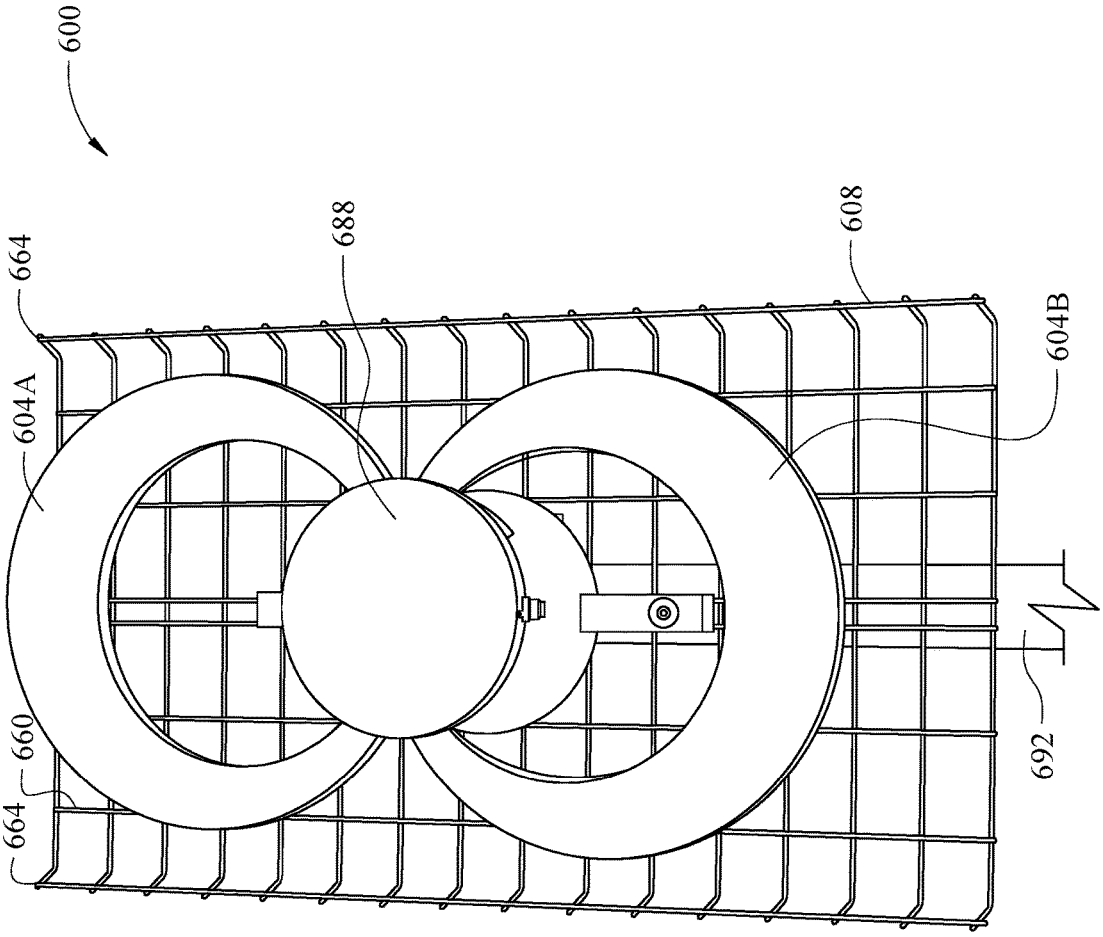


Fig. 19

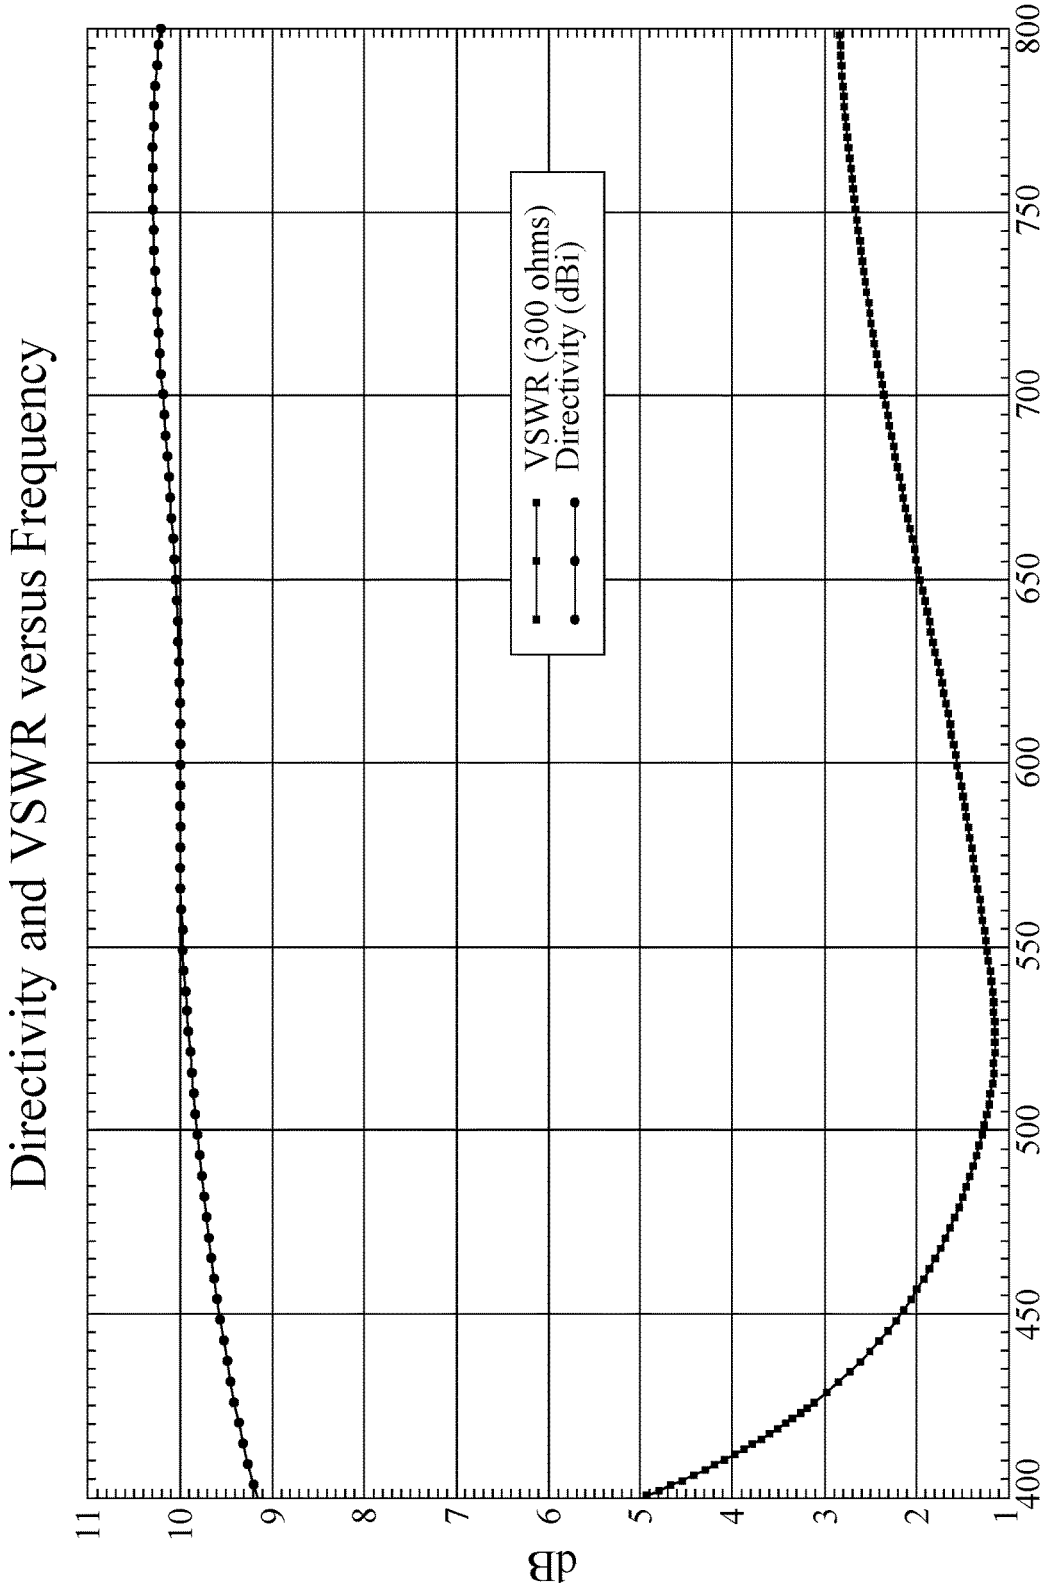

Directivity and VSWR versus Frequency
VSWR (300 ohms)
Directivity (dBi)
dB
Frequency
11
10
9
8
7
6
5
4
3
2
1
400
450
500
550
600
650
700
750
800

Fig. 20

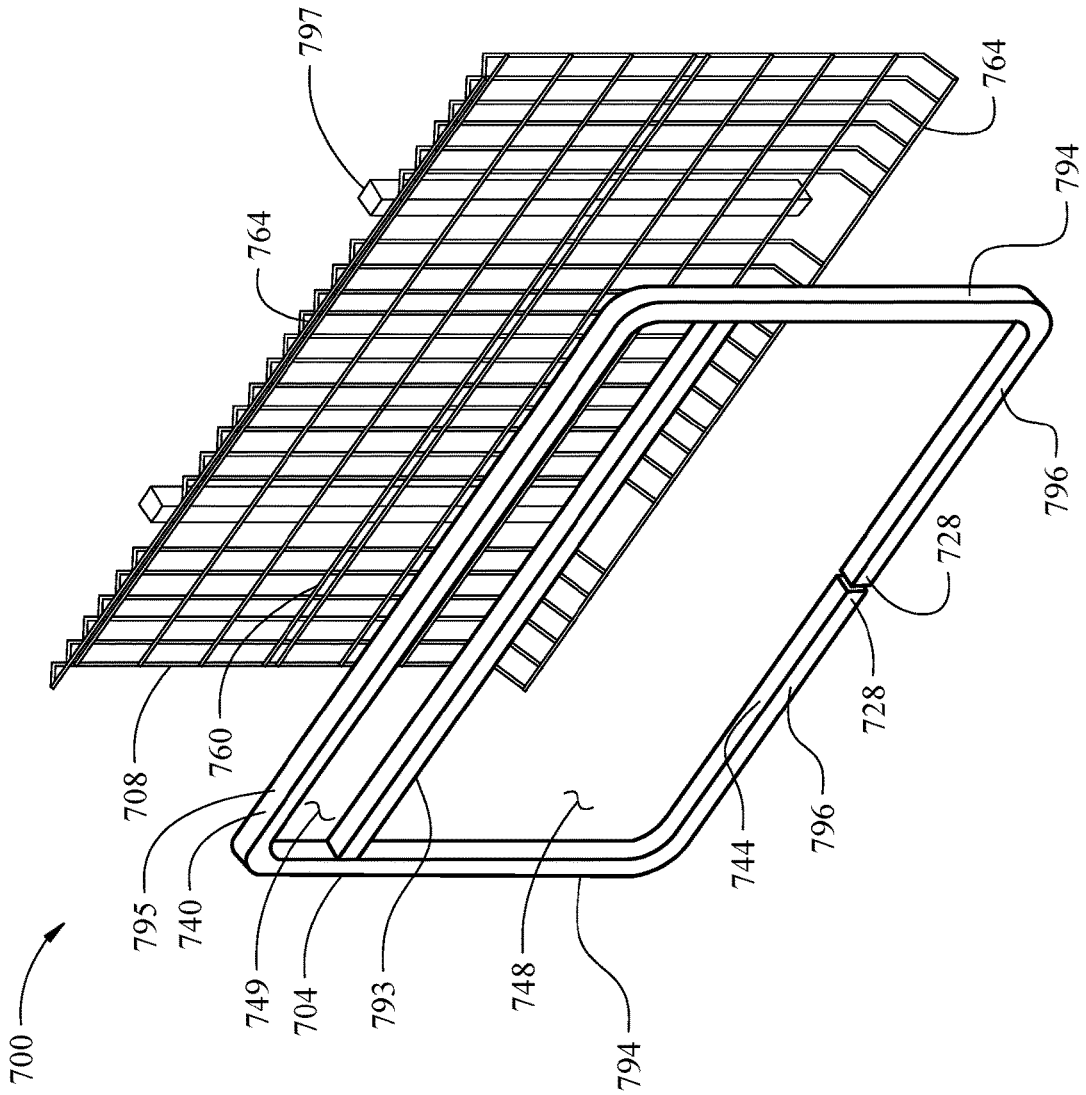

797
764
794
764
796
728
728
796
744
708
760
795
740
749
704
793
748
794
700

Fig. 21

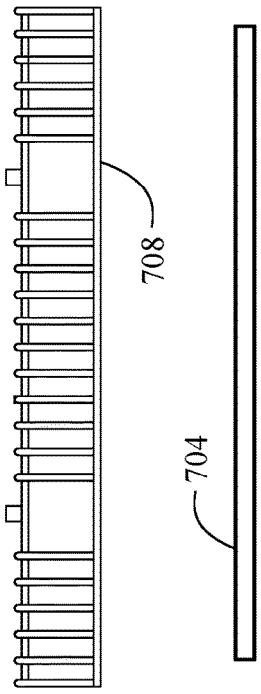


Fig. 23

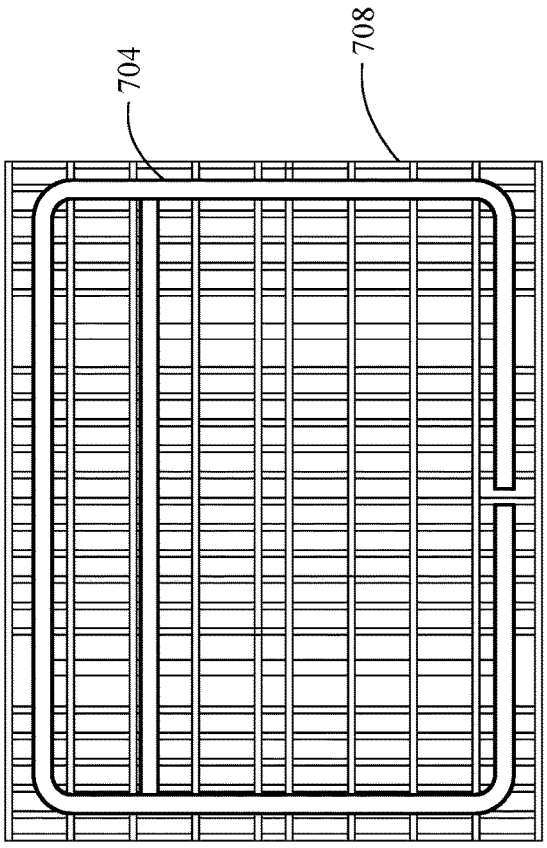


Fig. 22

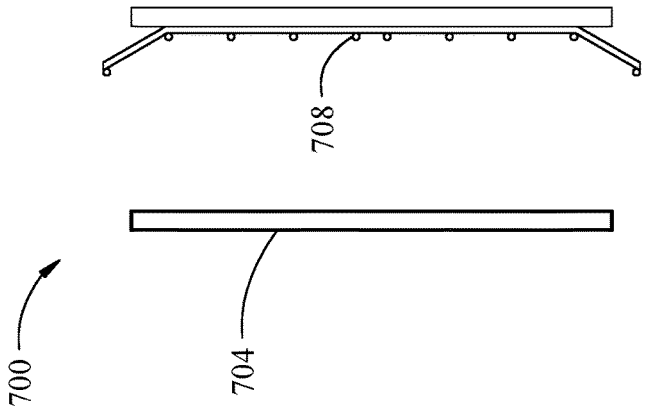


Fig. 24

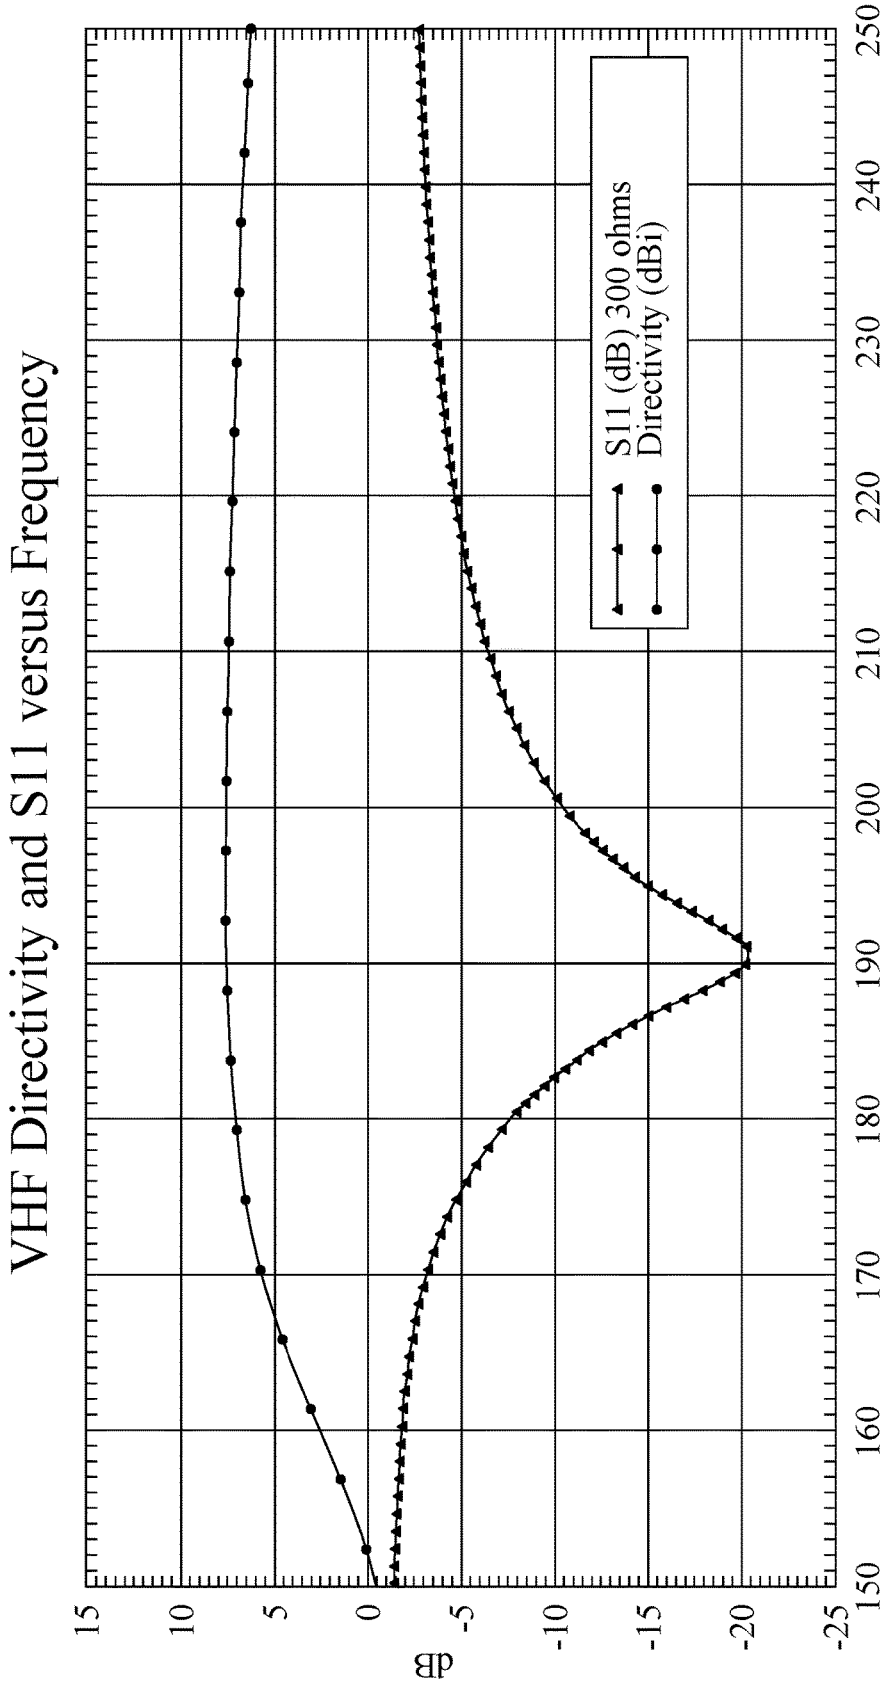

VHF Directivity and S11 versus Frequency
S11 (dB) 300 ohms
Directivity (dBi)
dB
Frequency
15
10
5
0
-5
-10
-15
-20
-25
150
160
170
180
190
200
210
220
230
240
250

Fig. 25

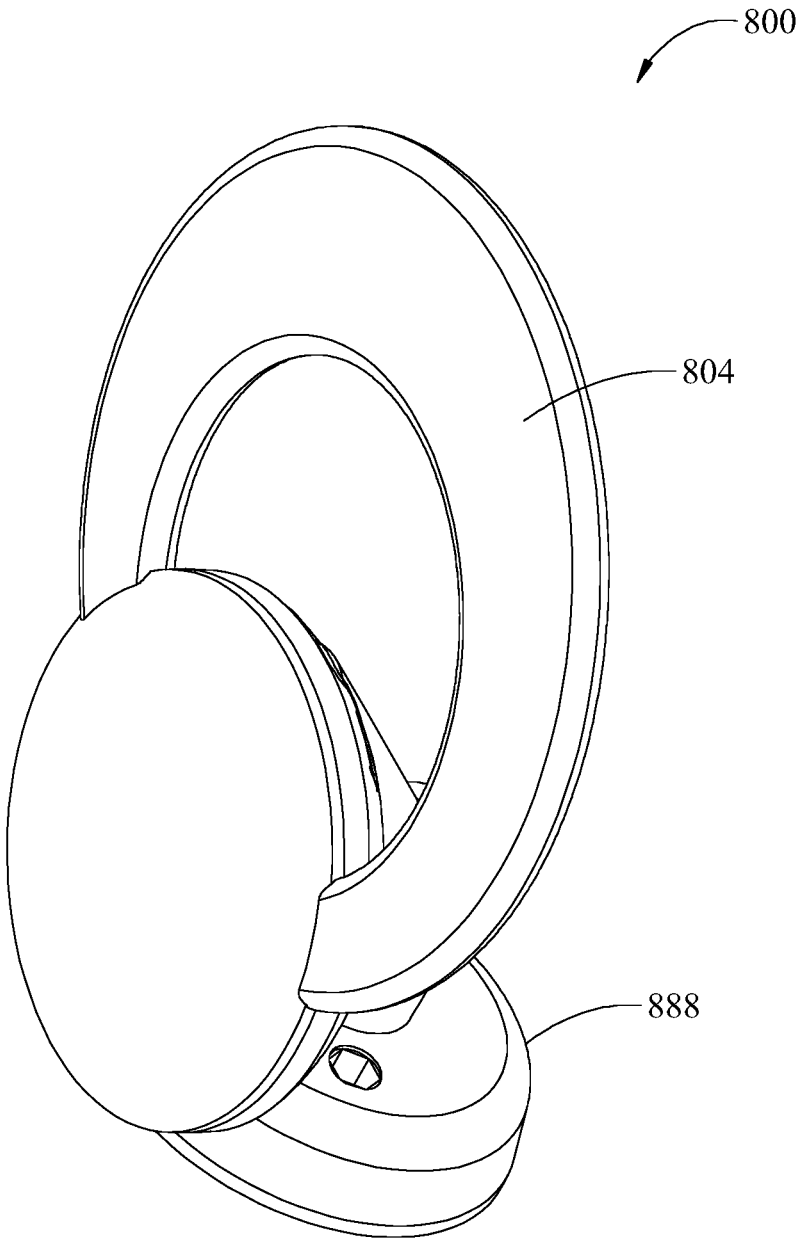


Fig. 26

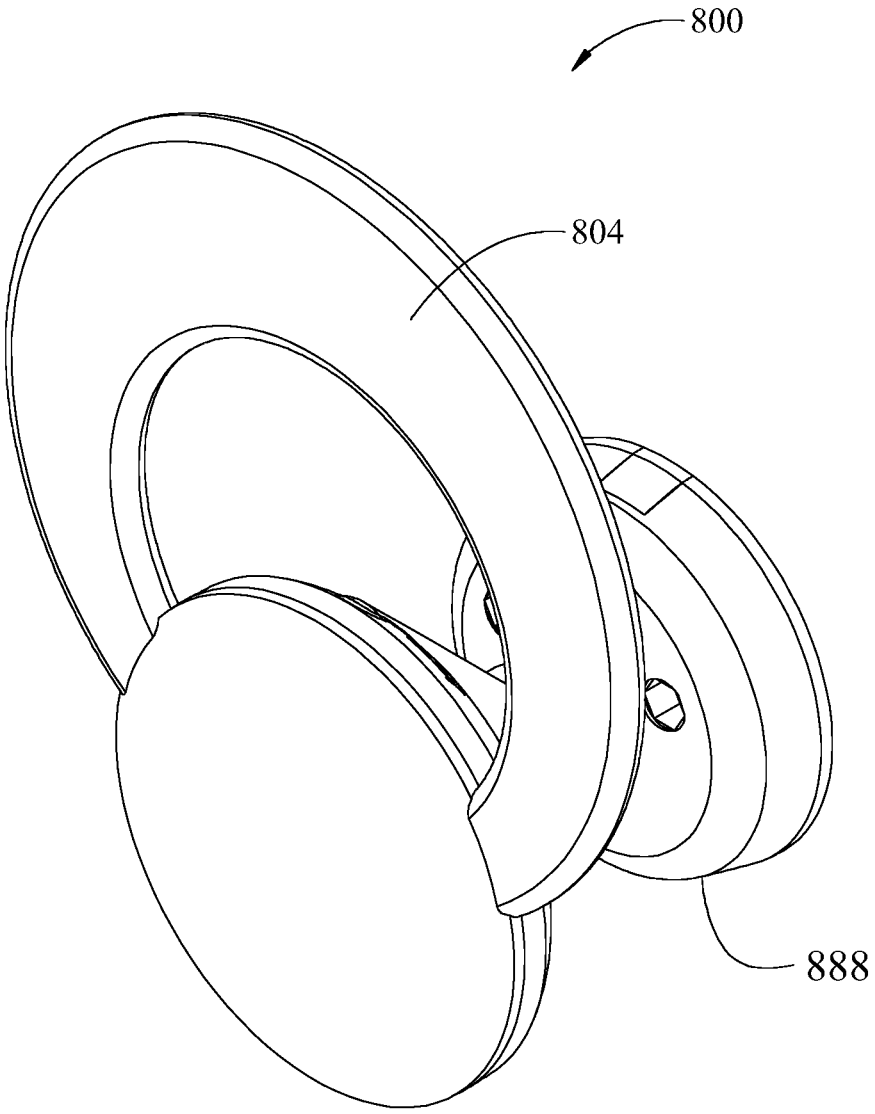


Fig. 27

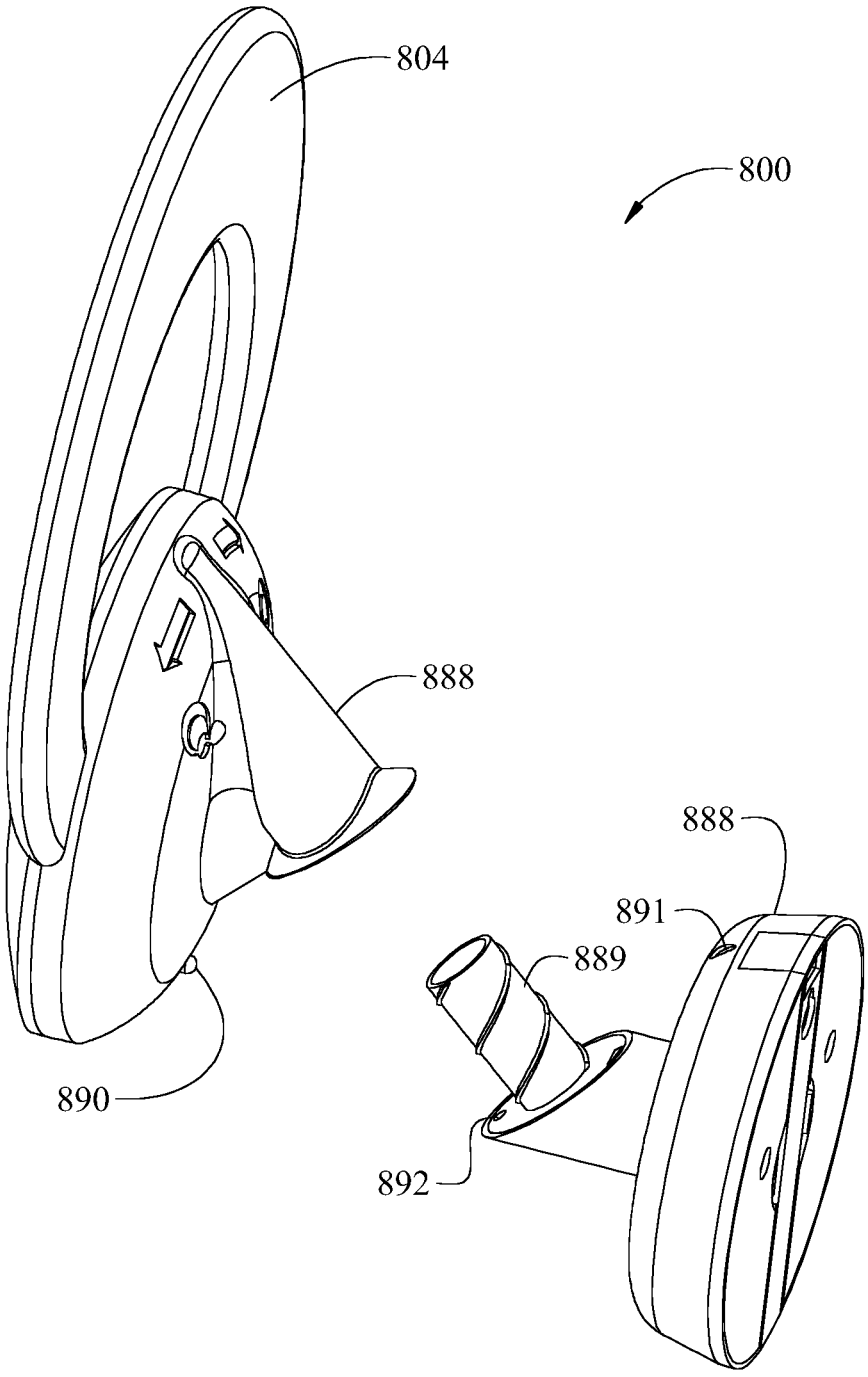


Fig. 28

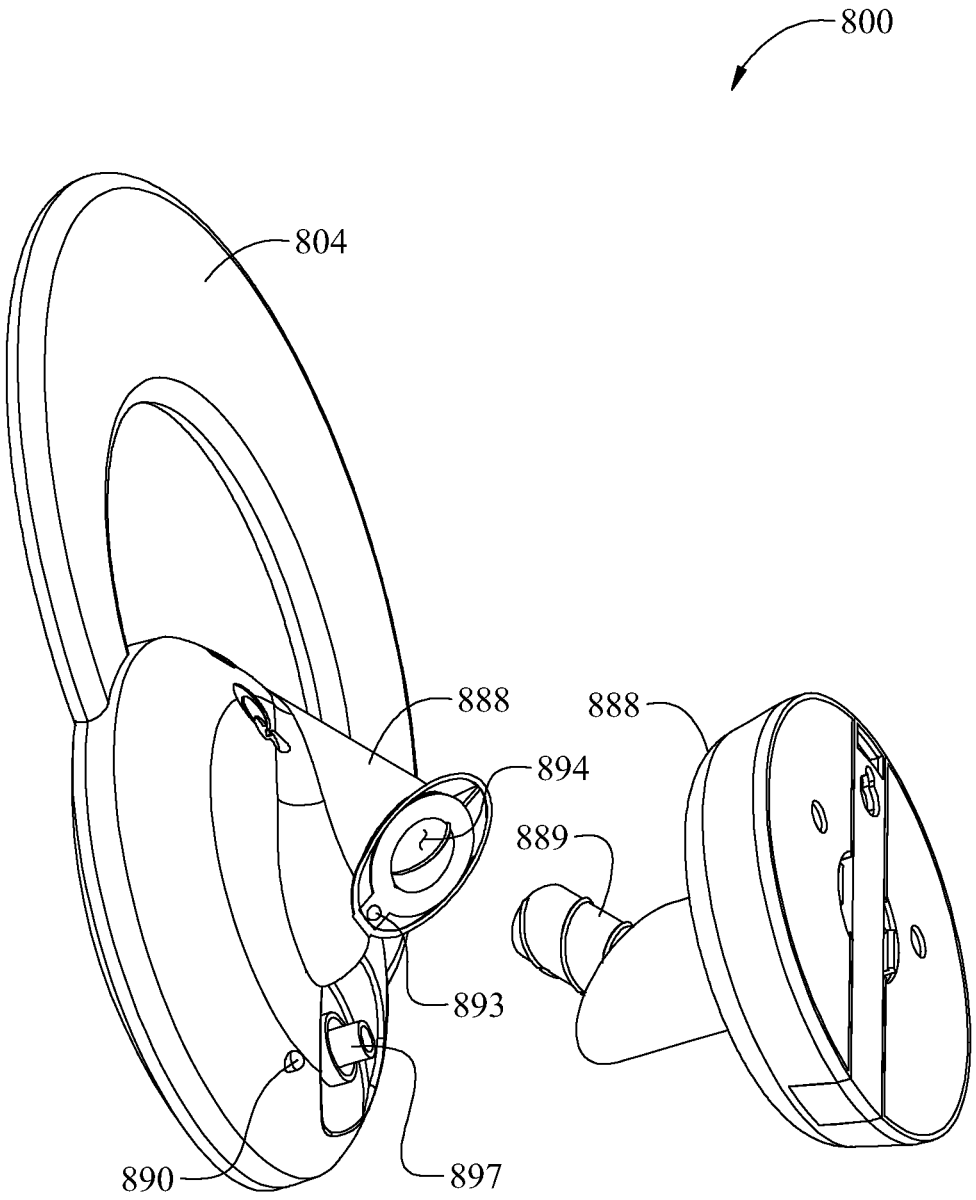


Fig. 29

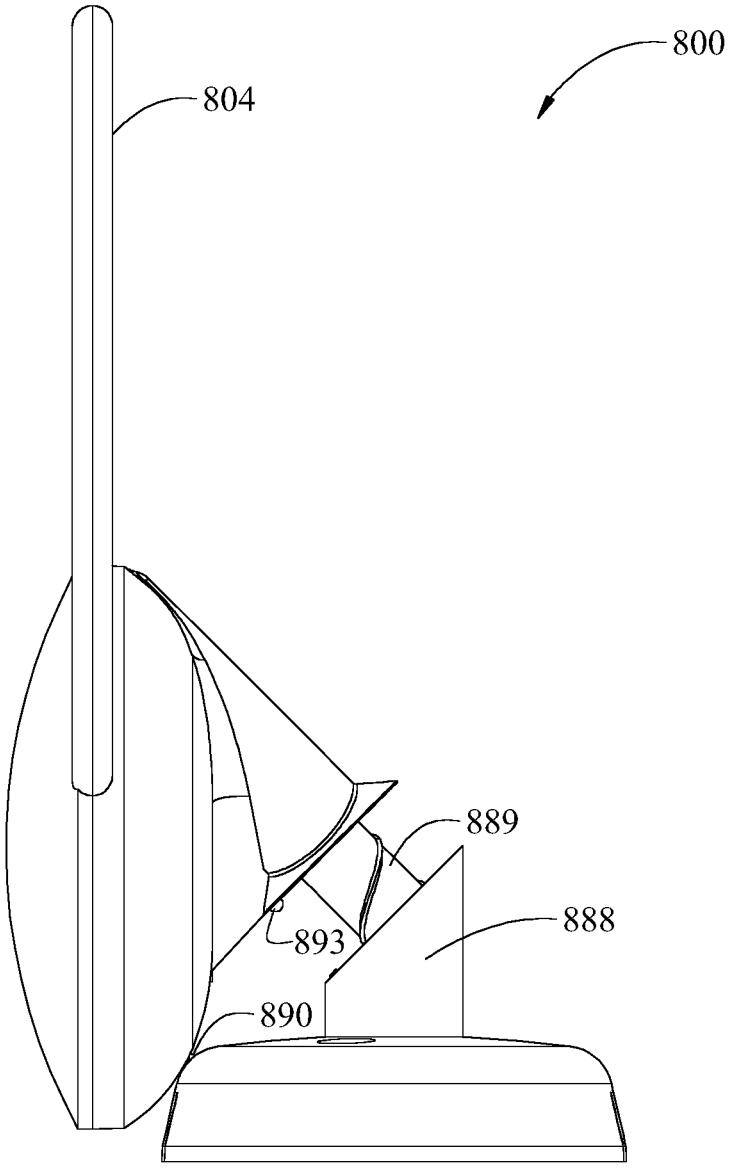


Fig. 30

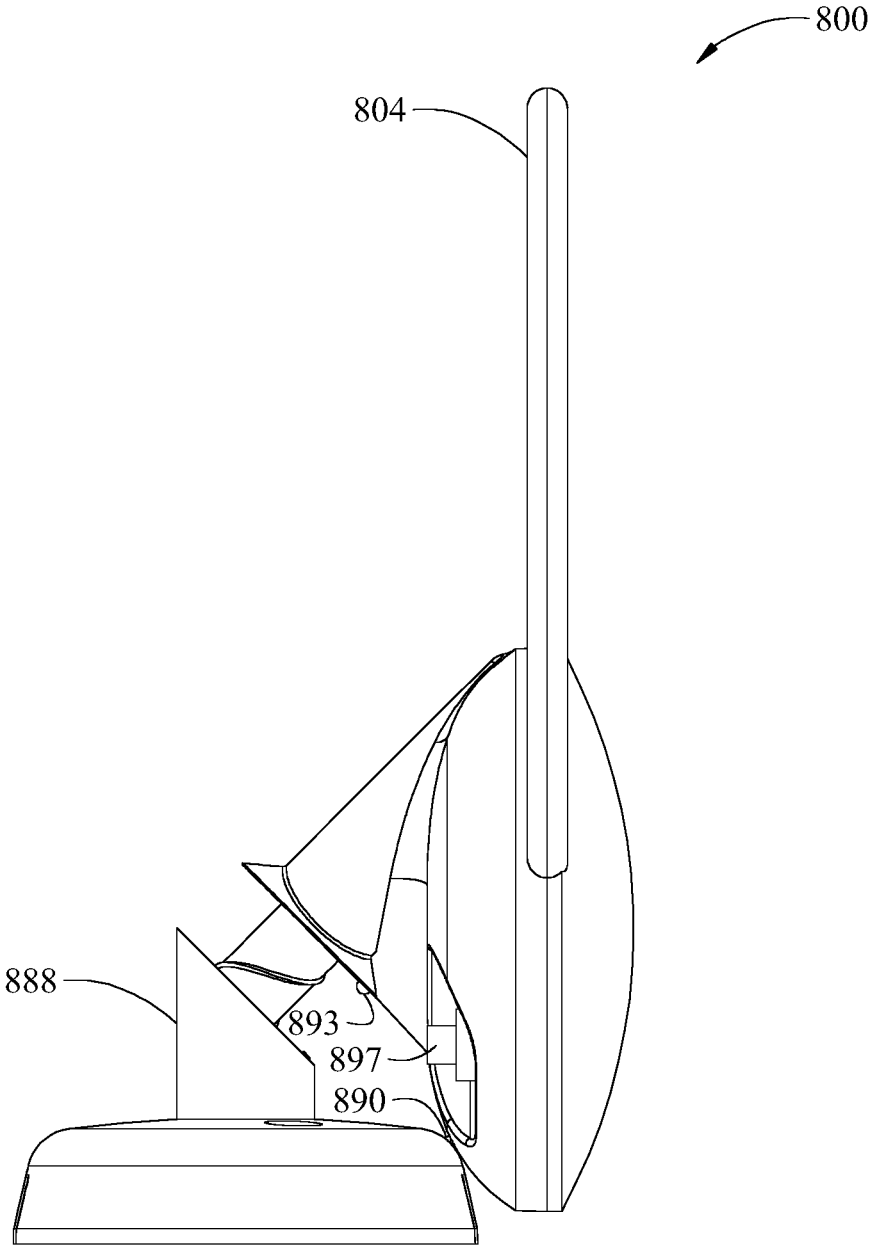


Fig. 31

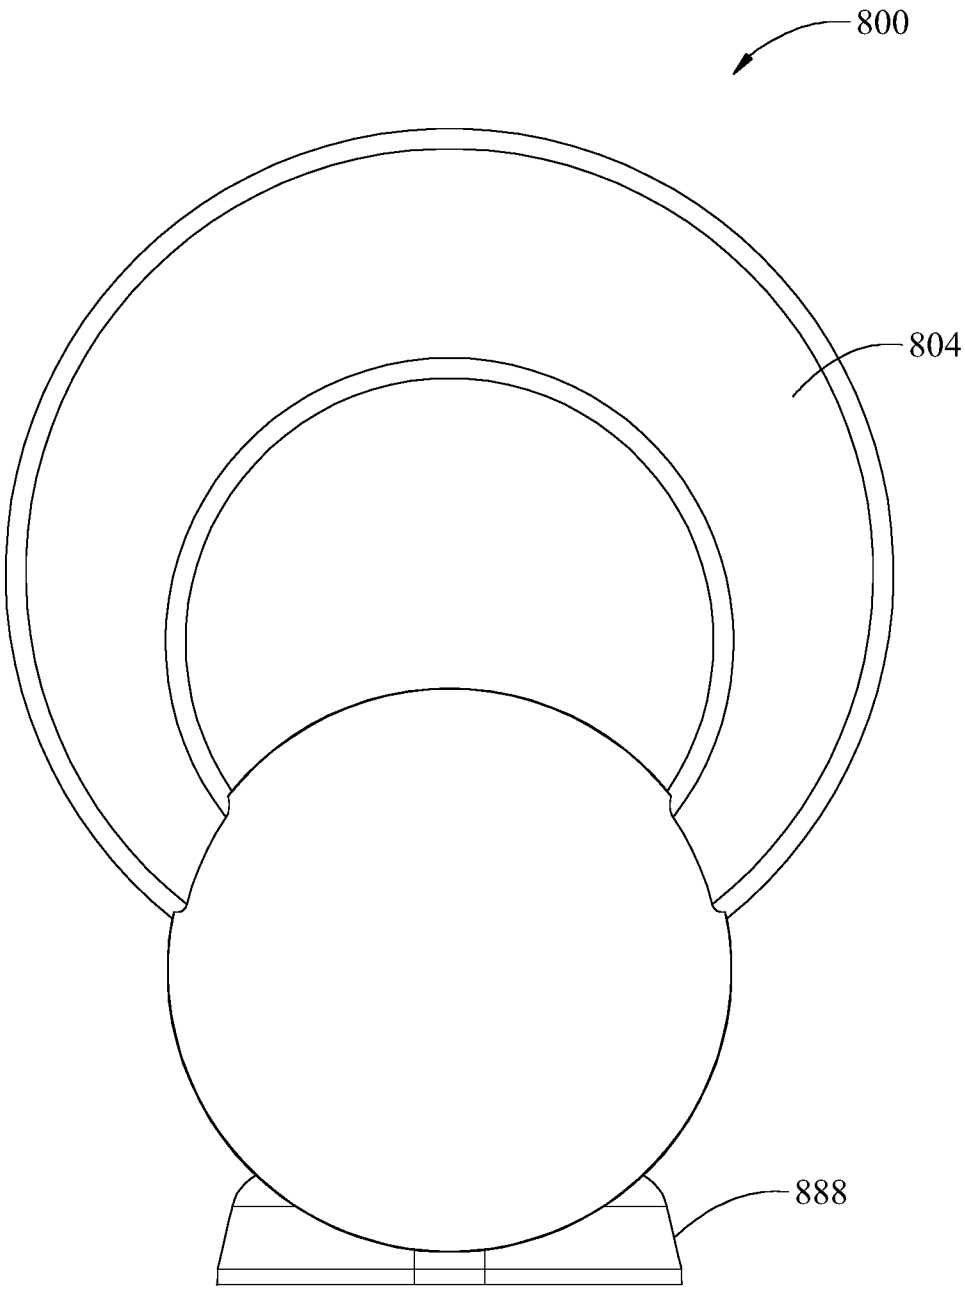


Fig. 32

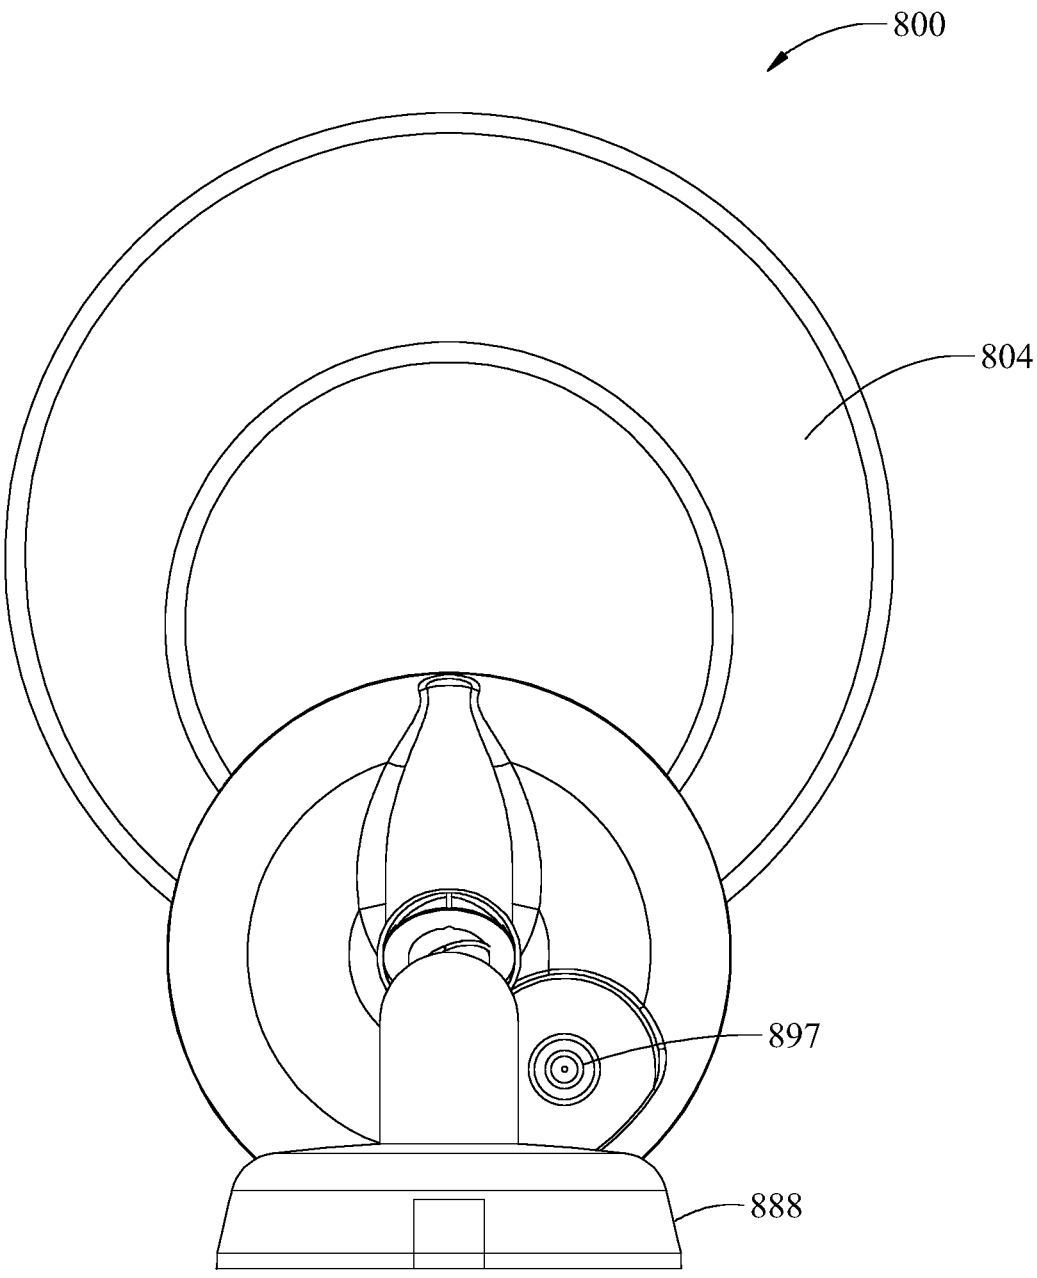


Fig. 33

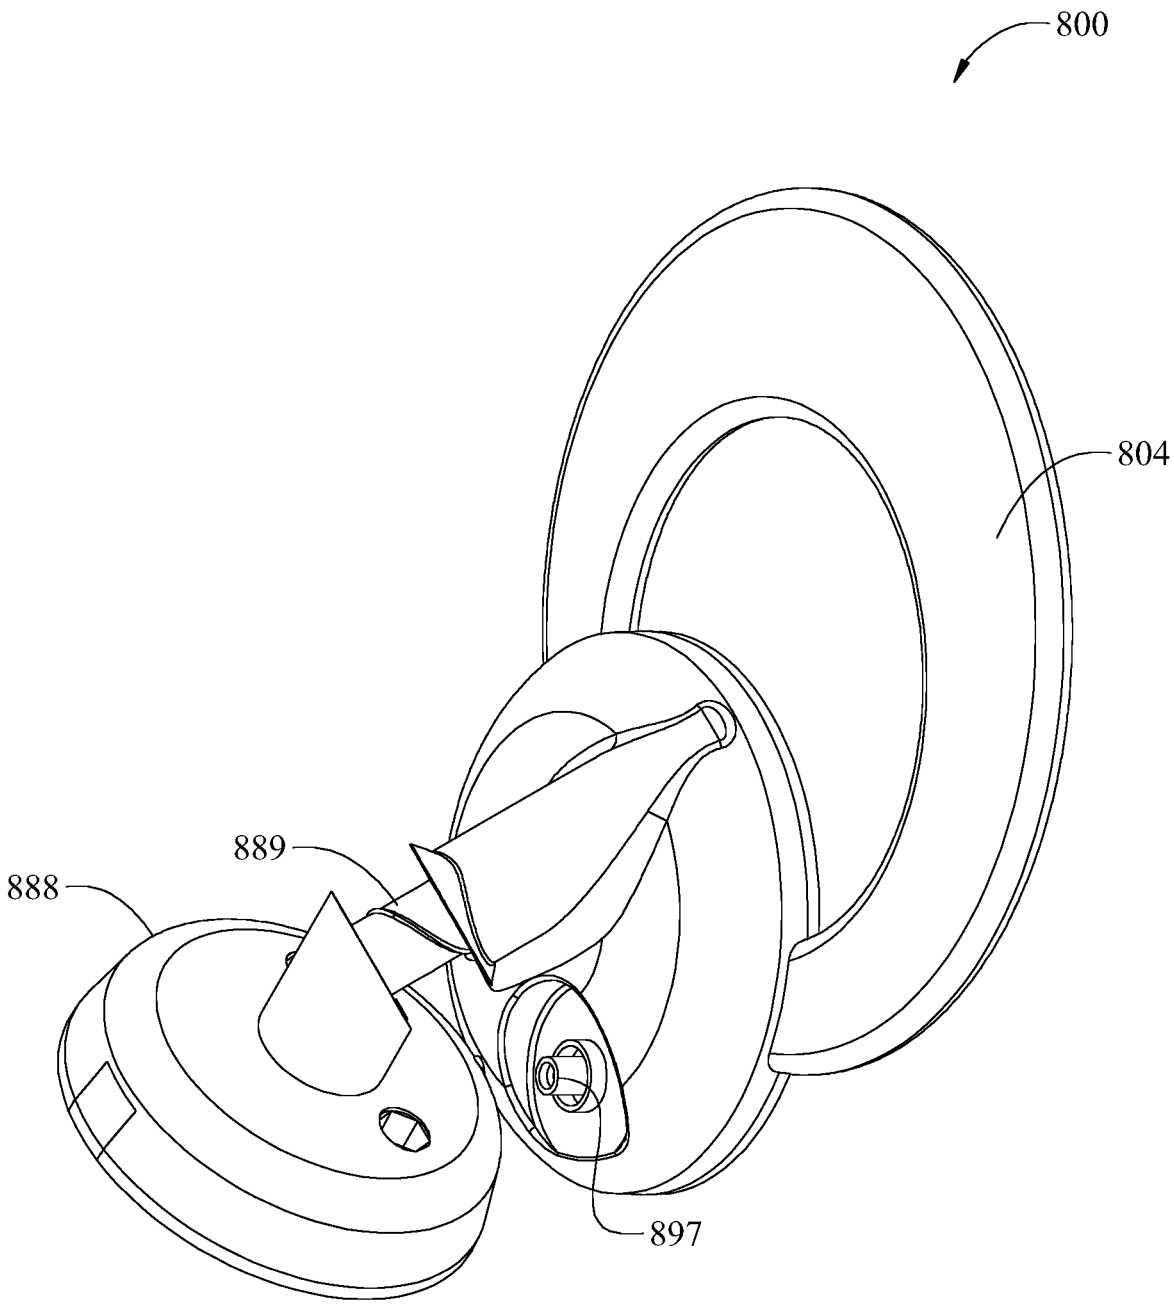


Fig. 34

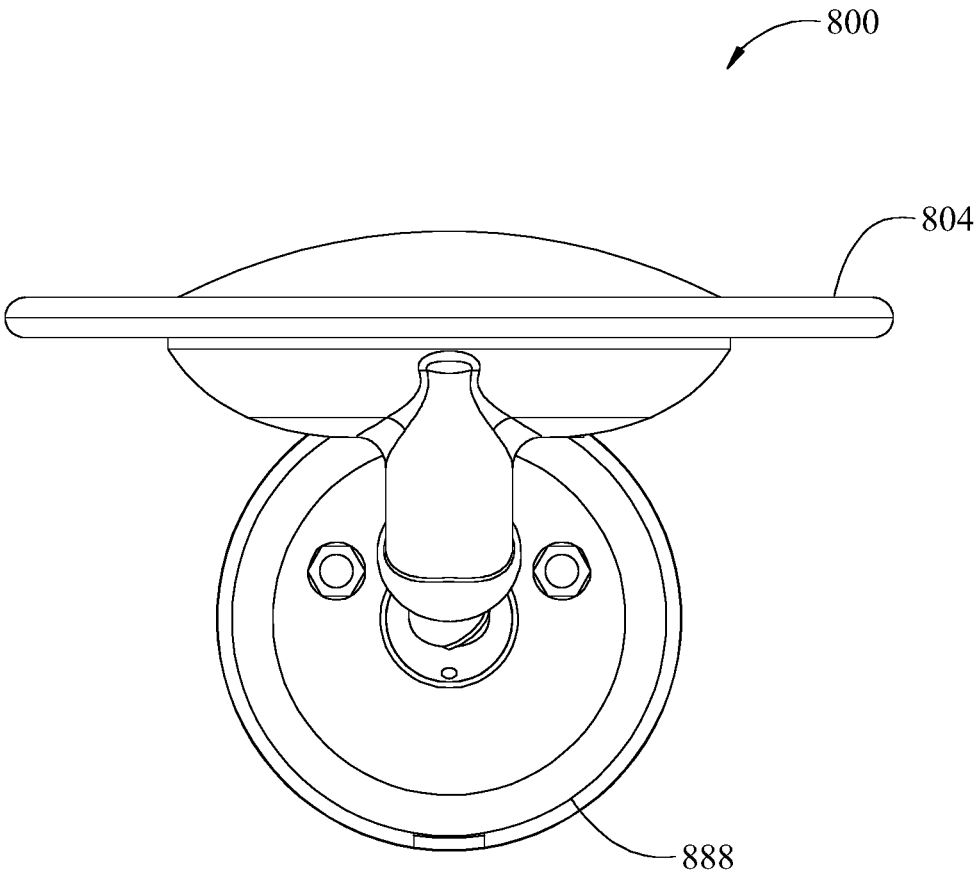


Fig. 35

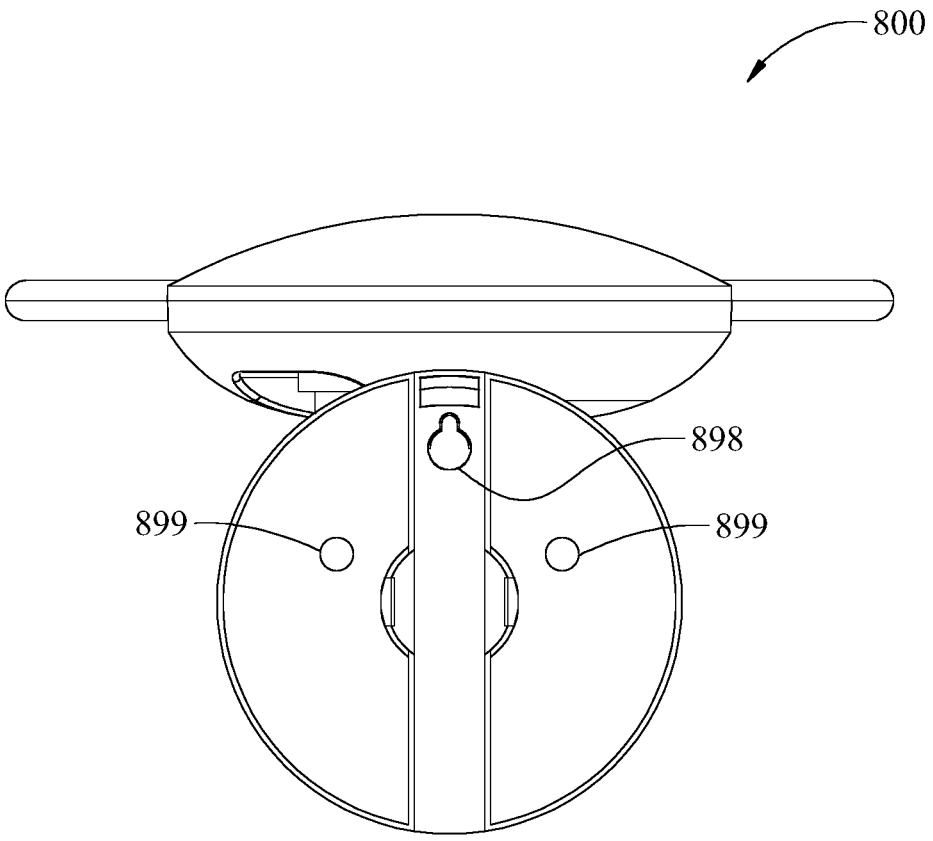


Fig. 36

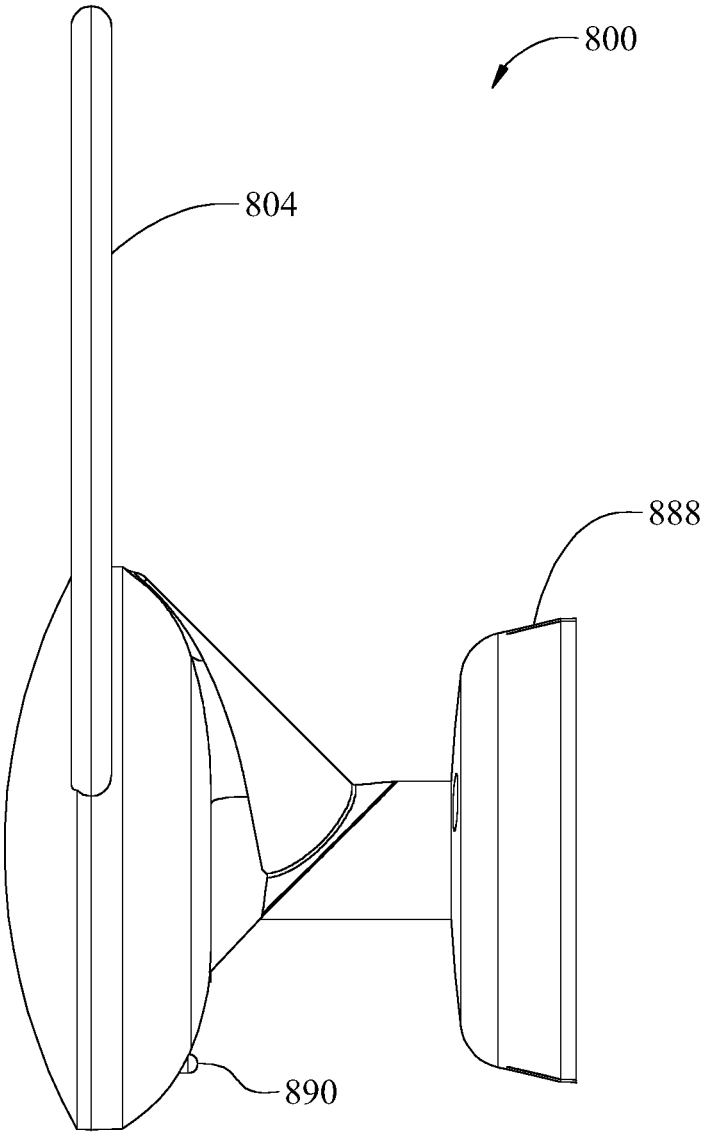


Fig. 37

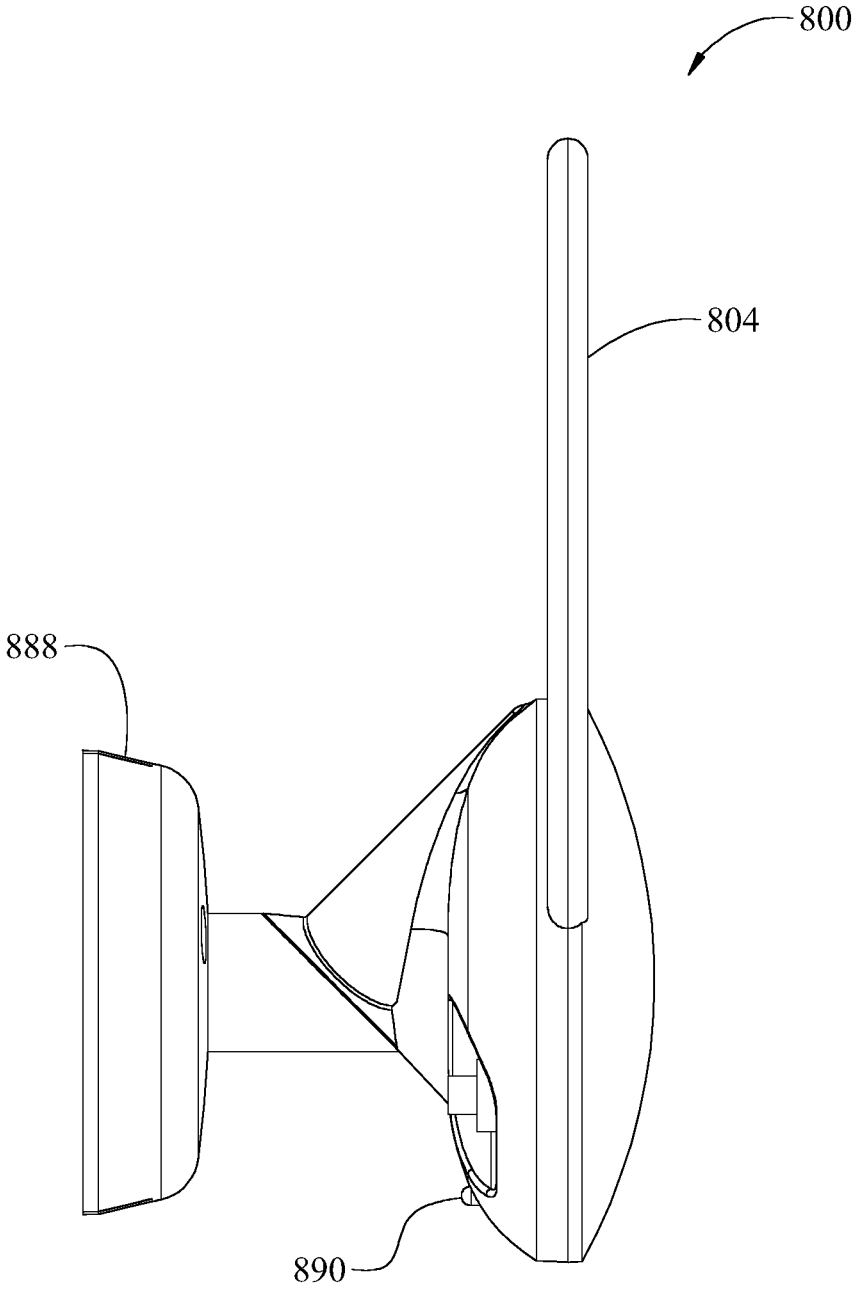


Fig. 38

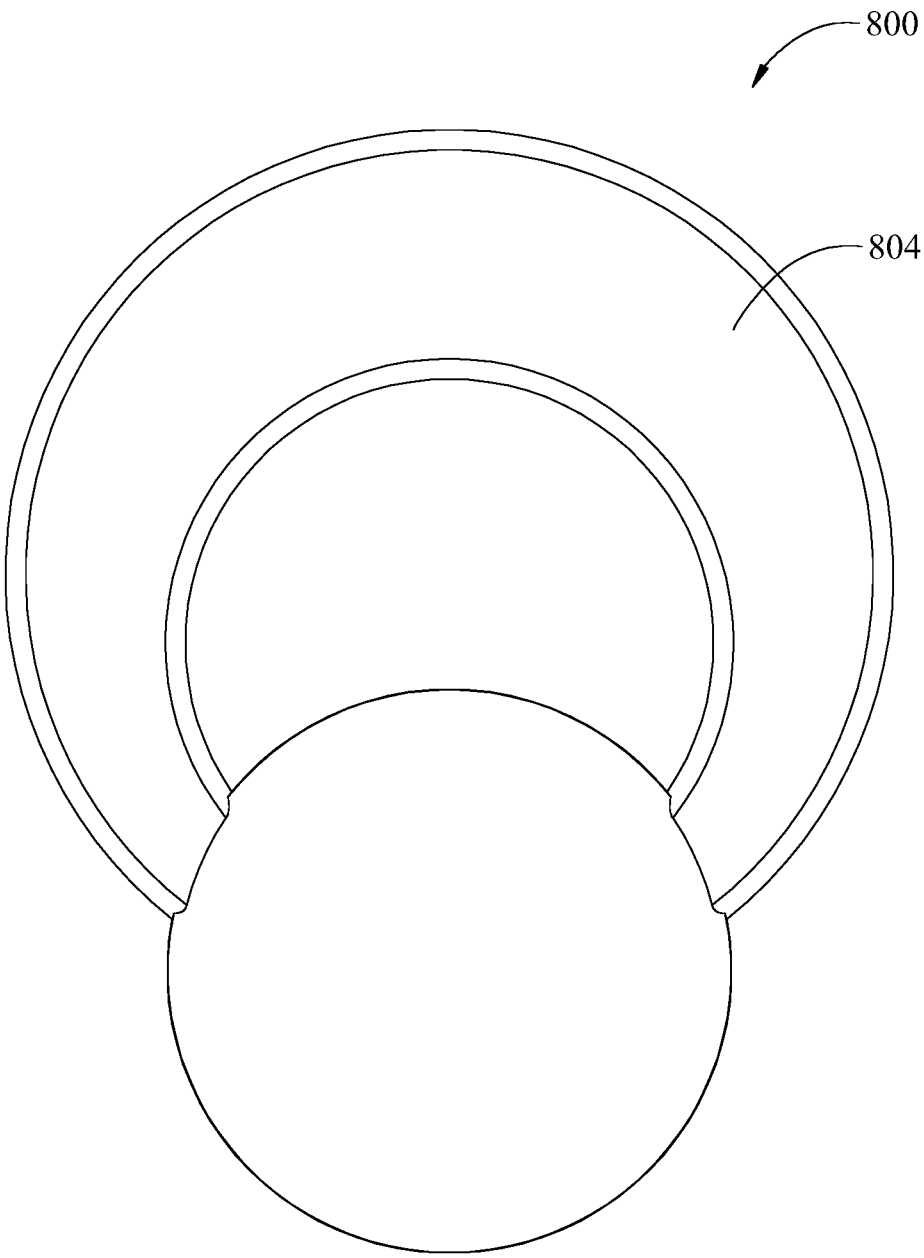


Fig. 39

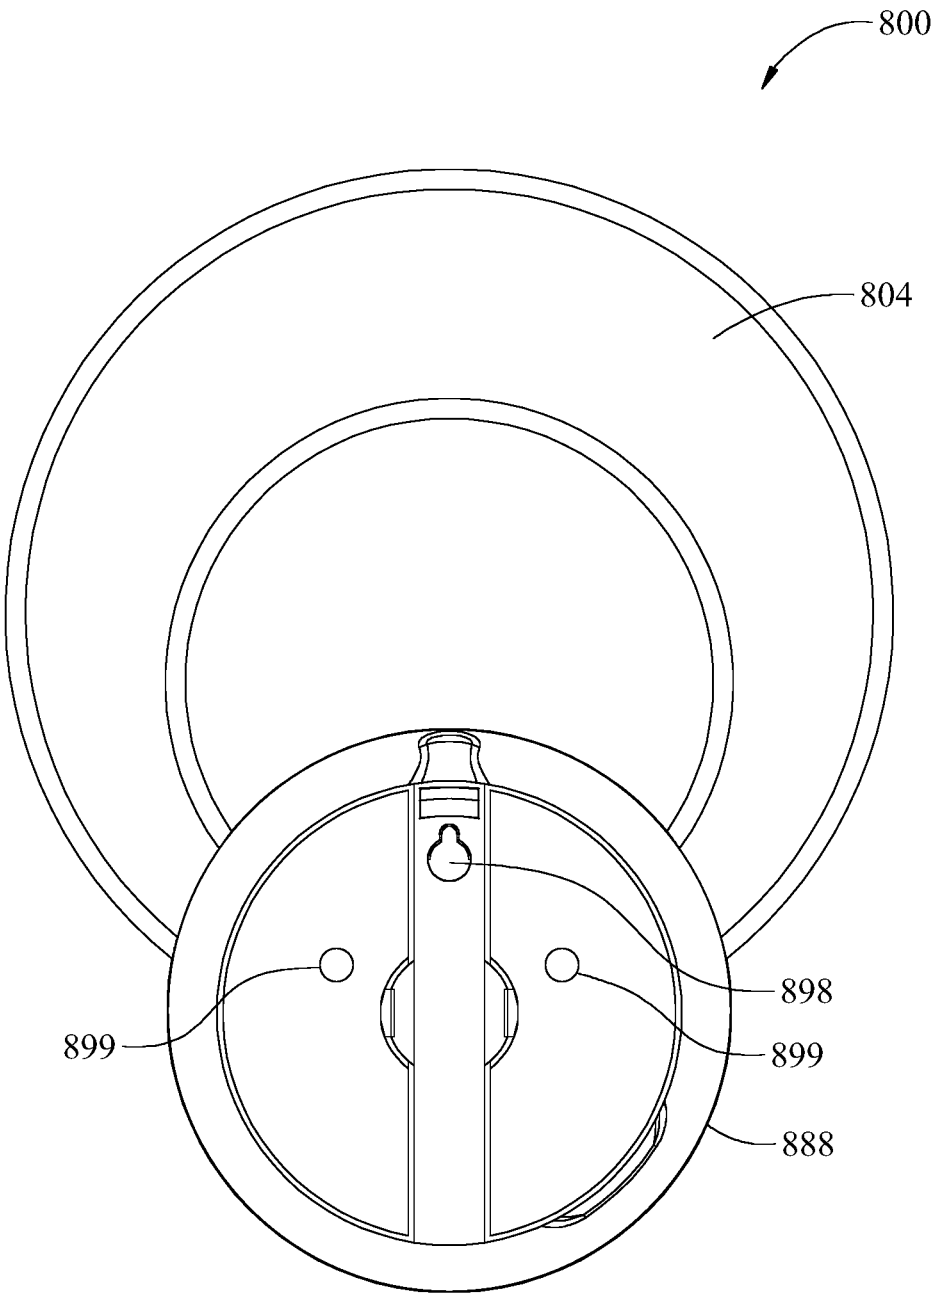


Fig. 40

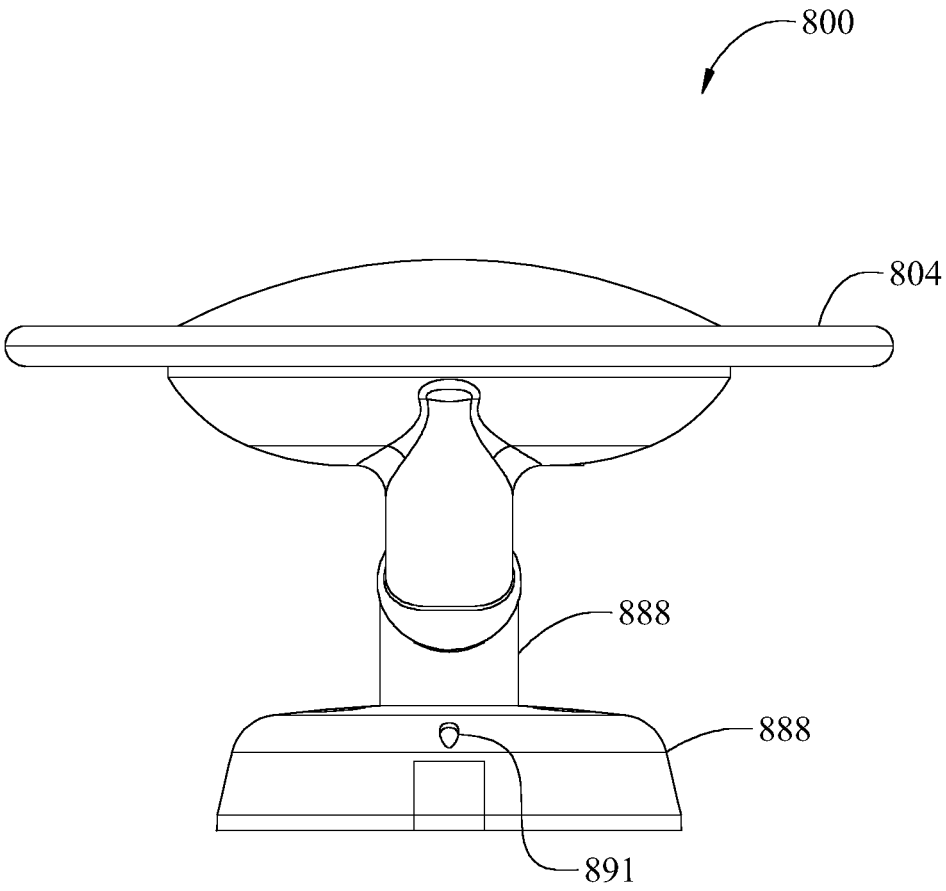


Fig. 41

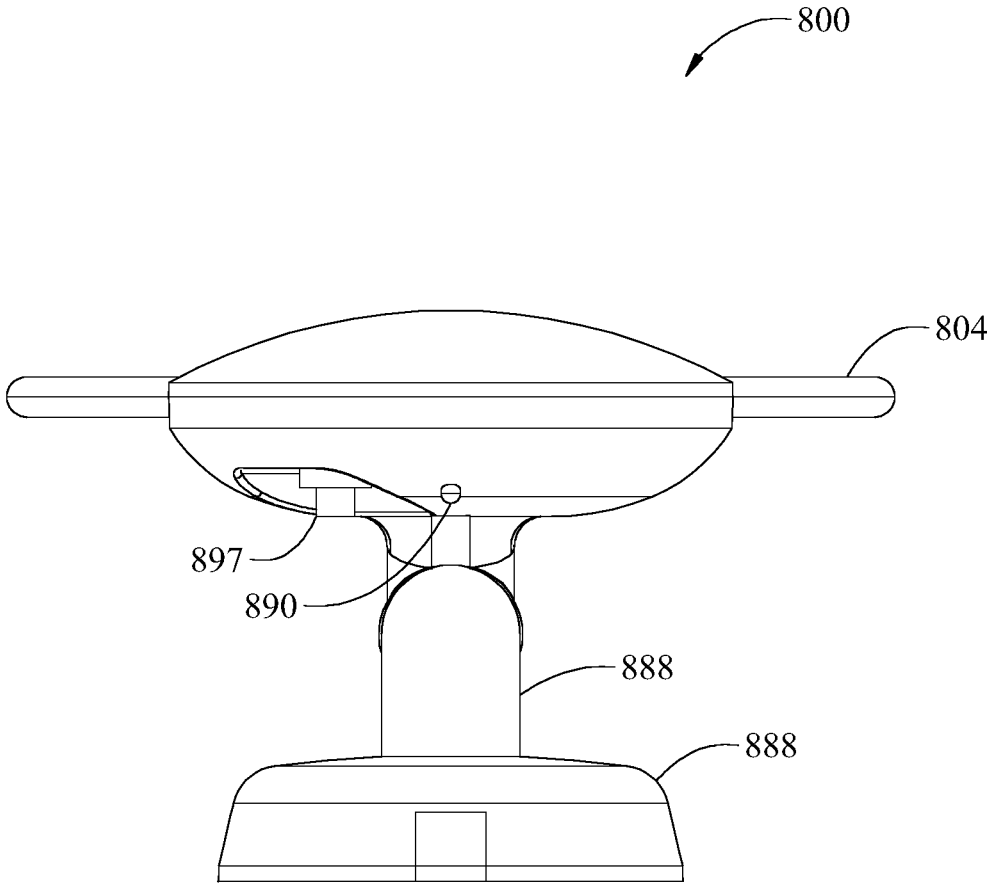


Fig. 42

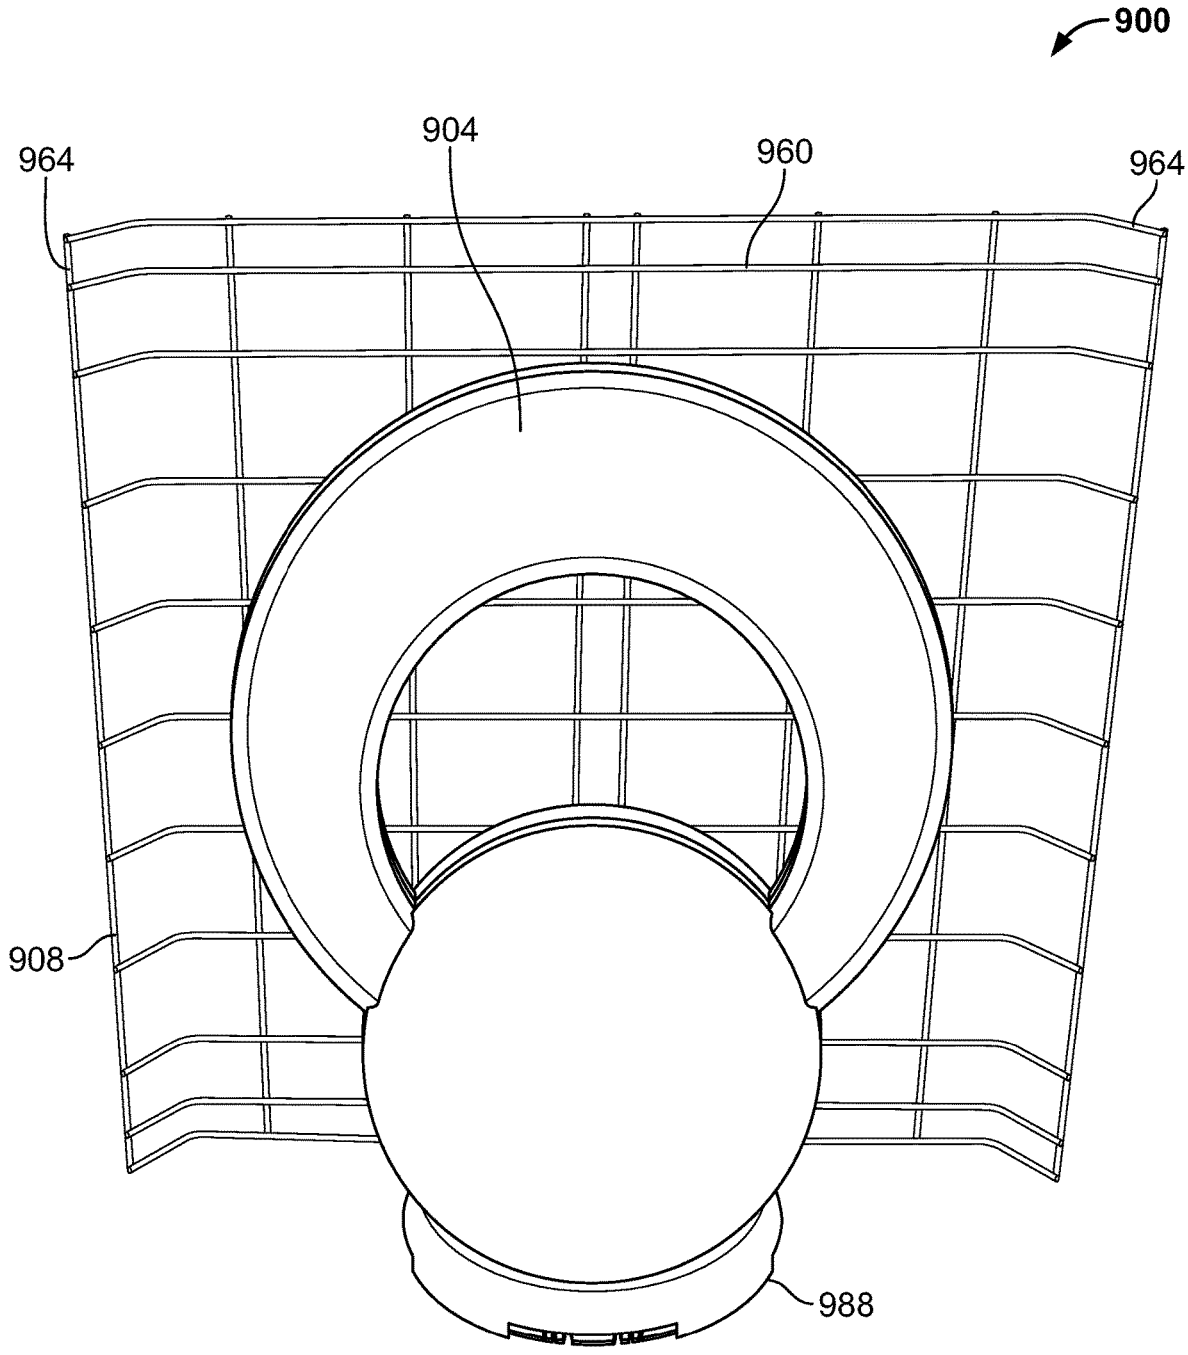


Fig. 43

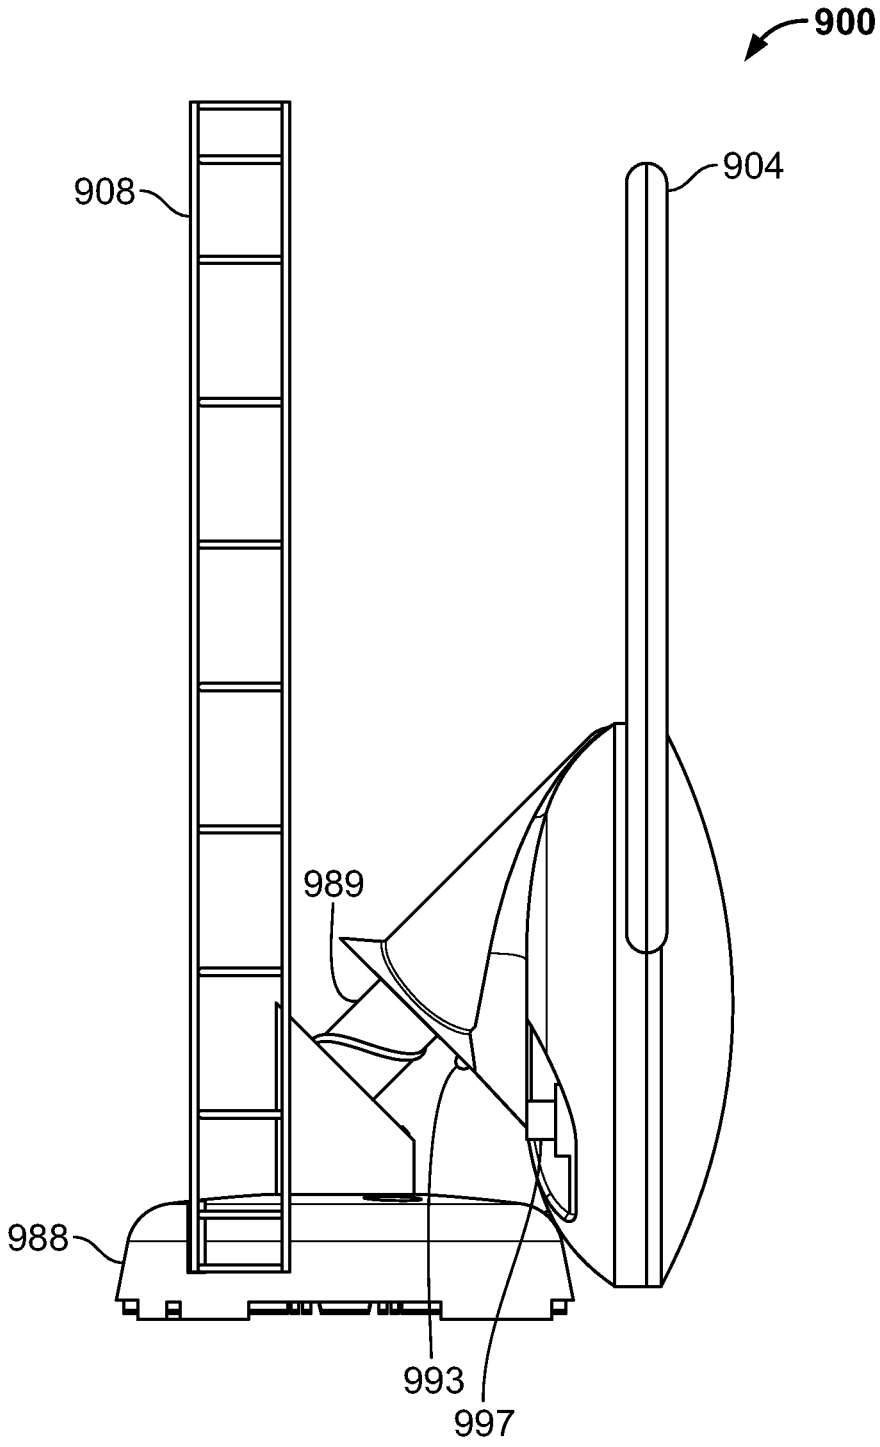


Fig. 44

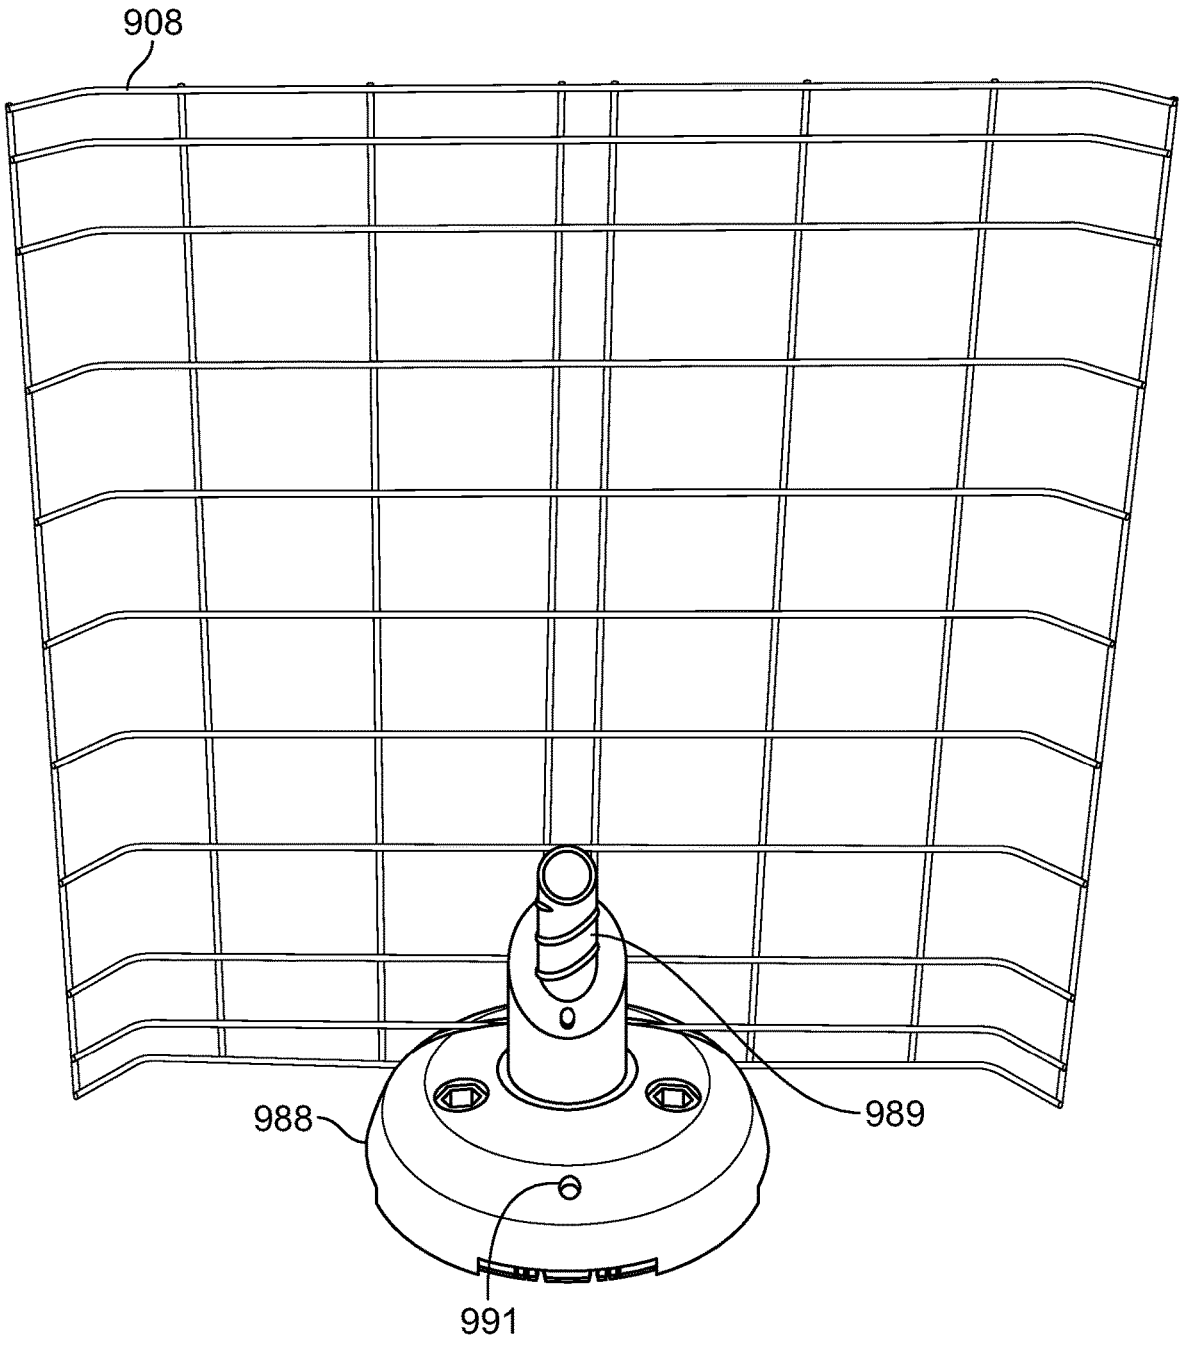


Fig. 45

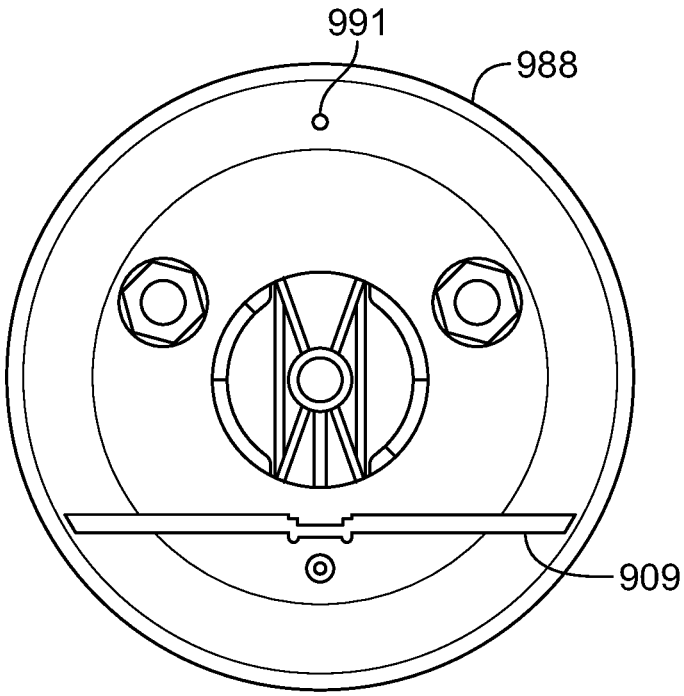


Fig. 46

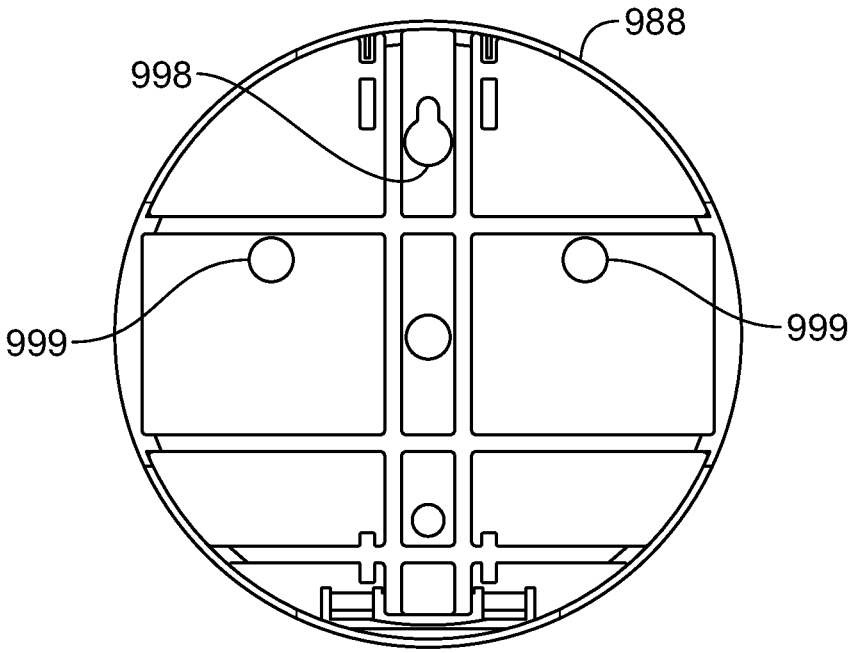


Fig. 47

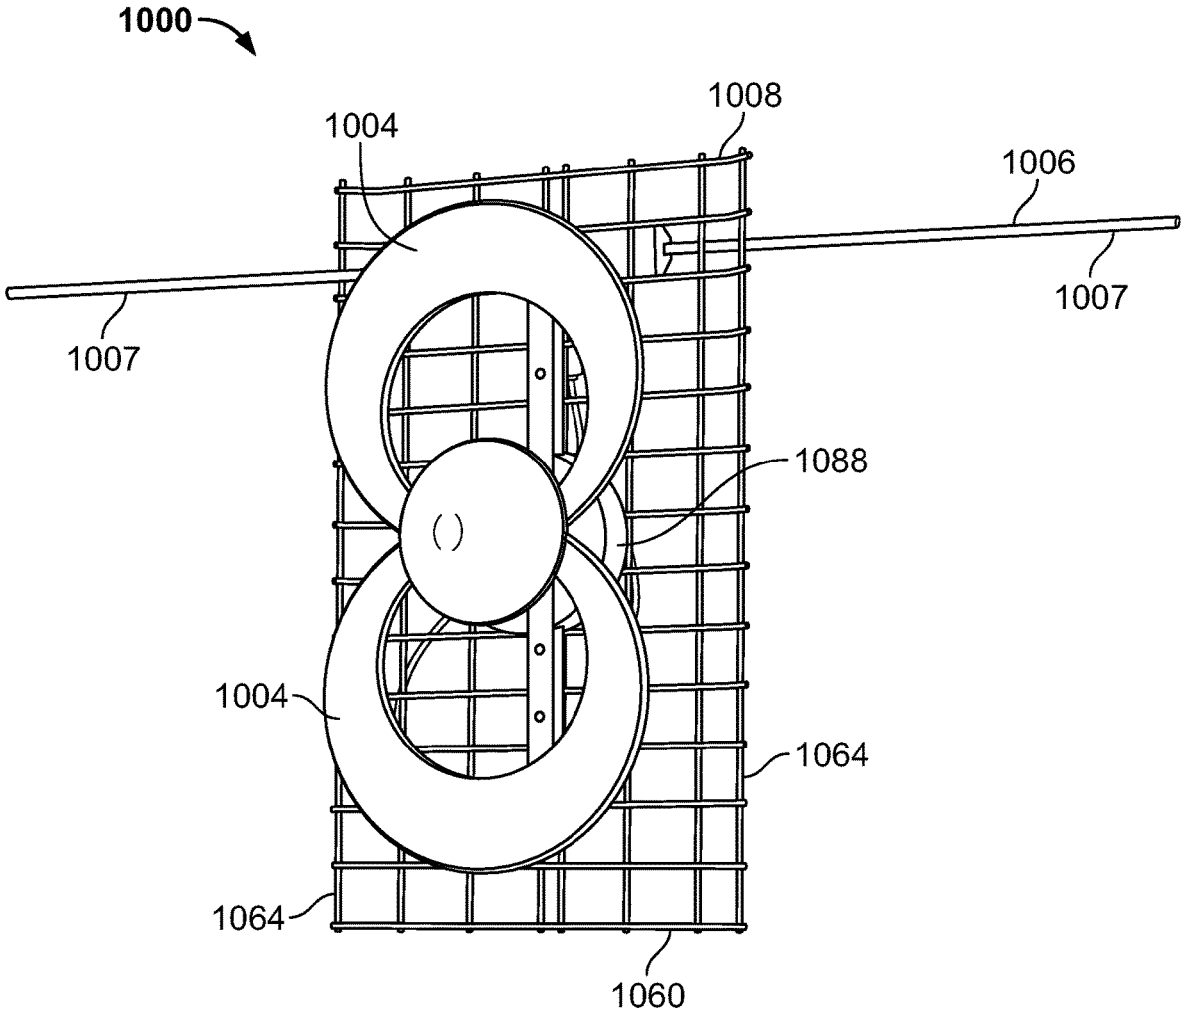


Fig. 48

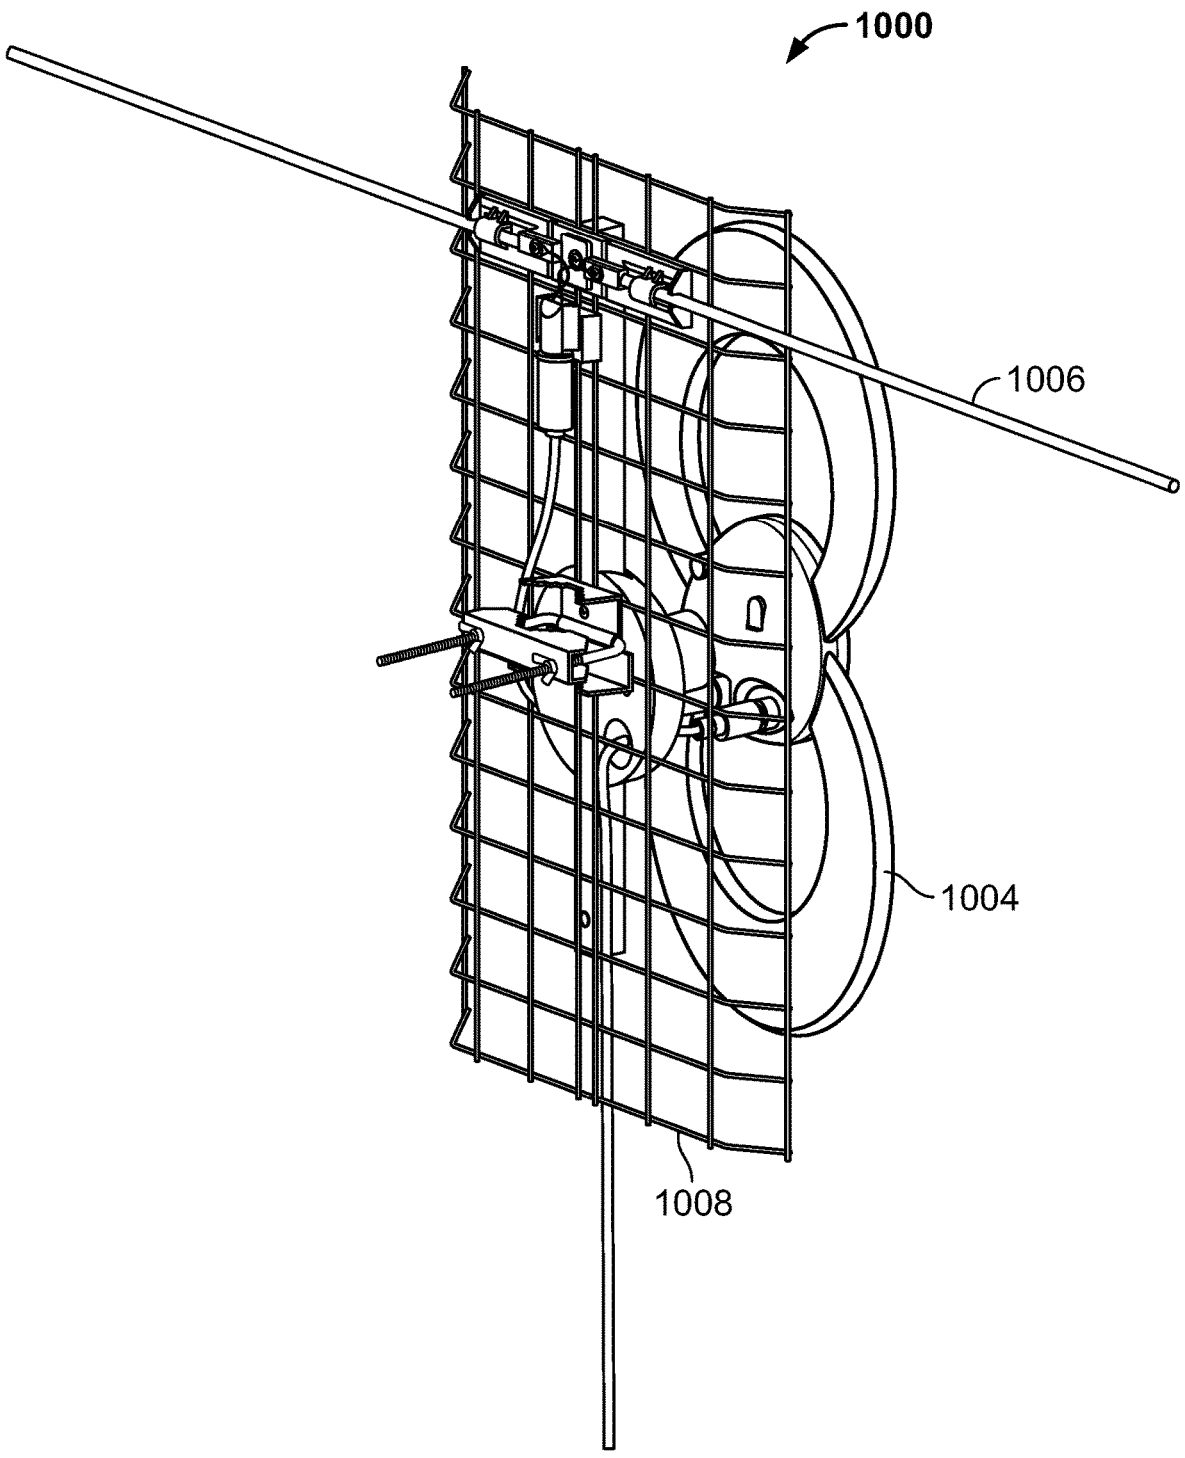


Fig. 49

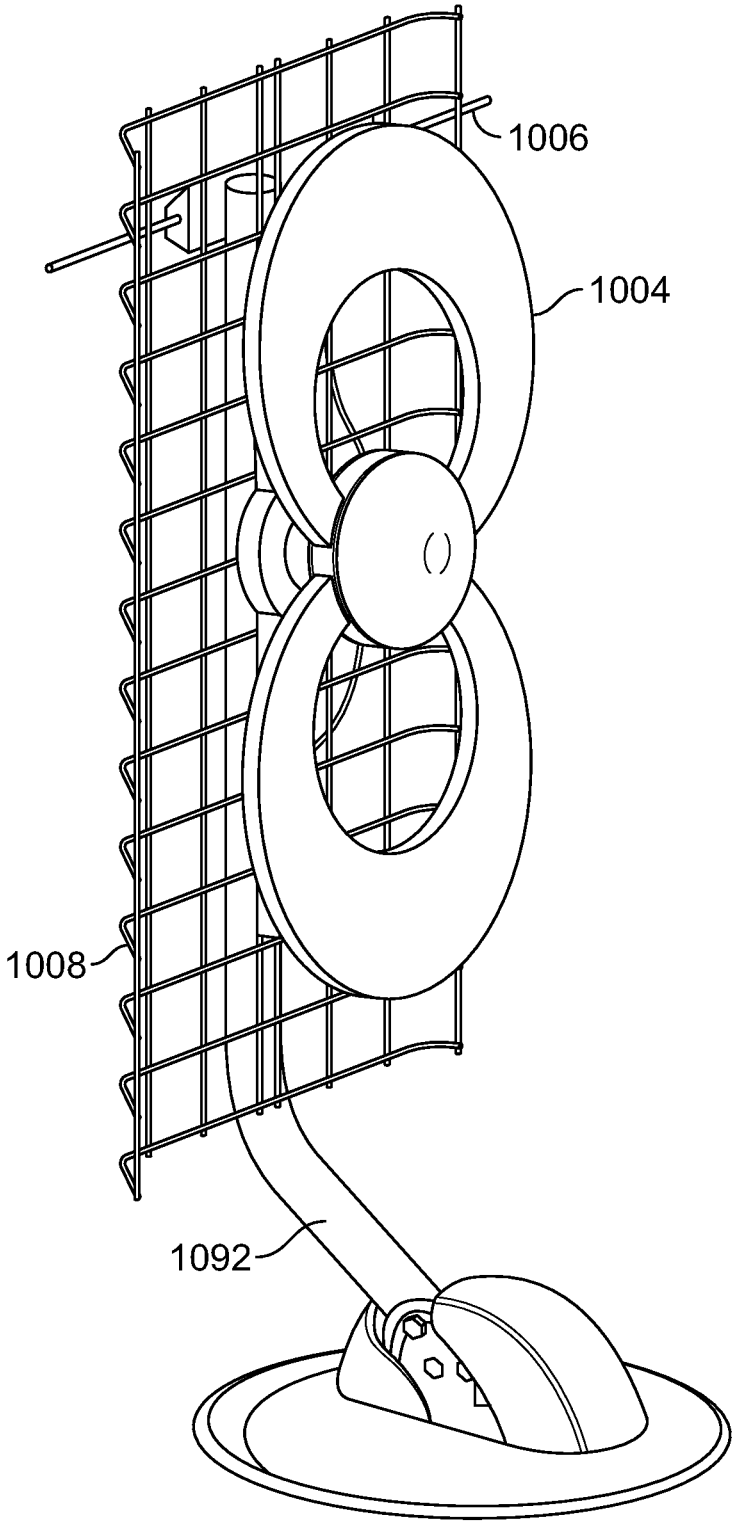


Fig. 50

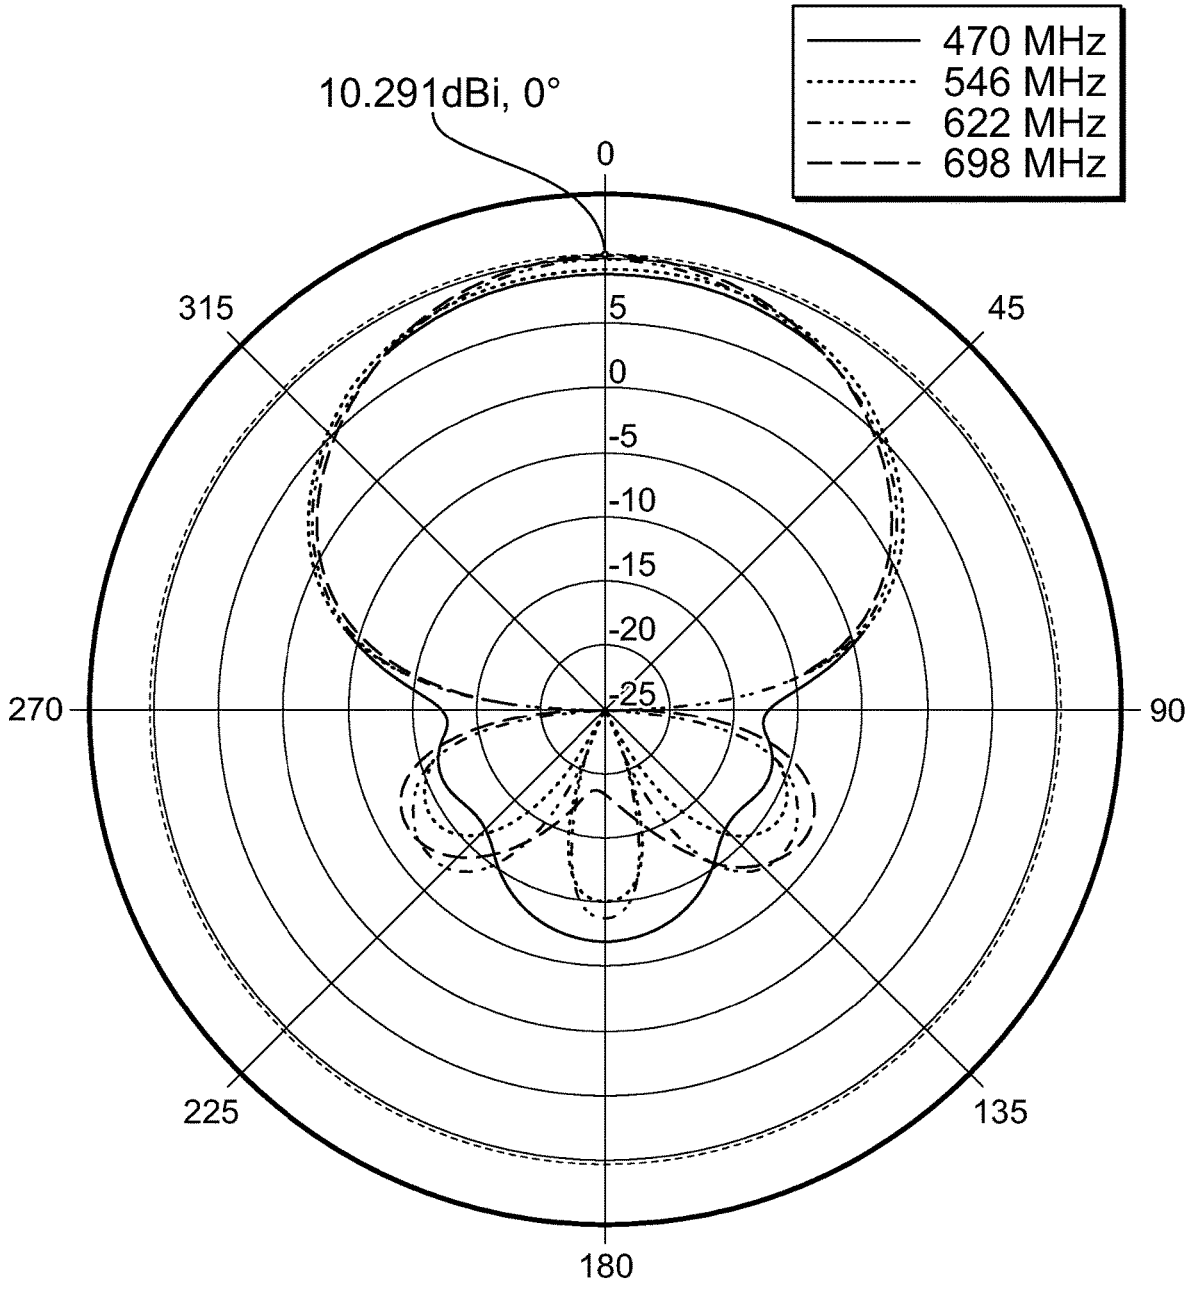

470 MHz
546 MHz
622 MHz
698 MHz
10.291dBi, 0°
0
45
90
135
180
225
270
315
5
0
-5
-10
-15
-20
-25

Fig. 51

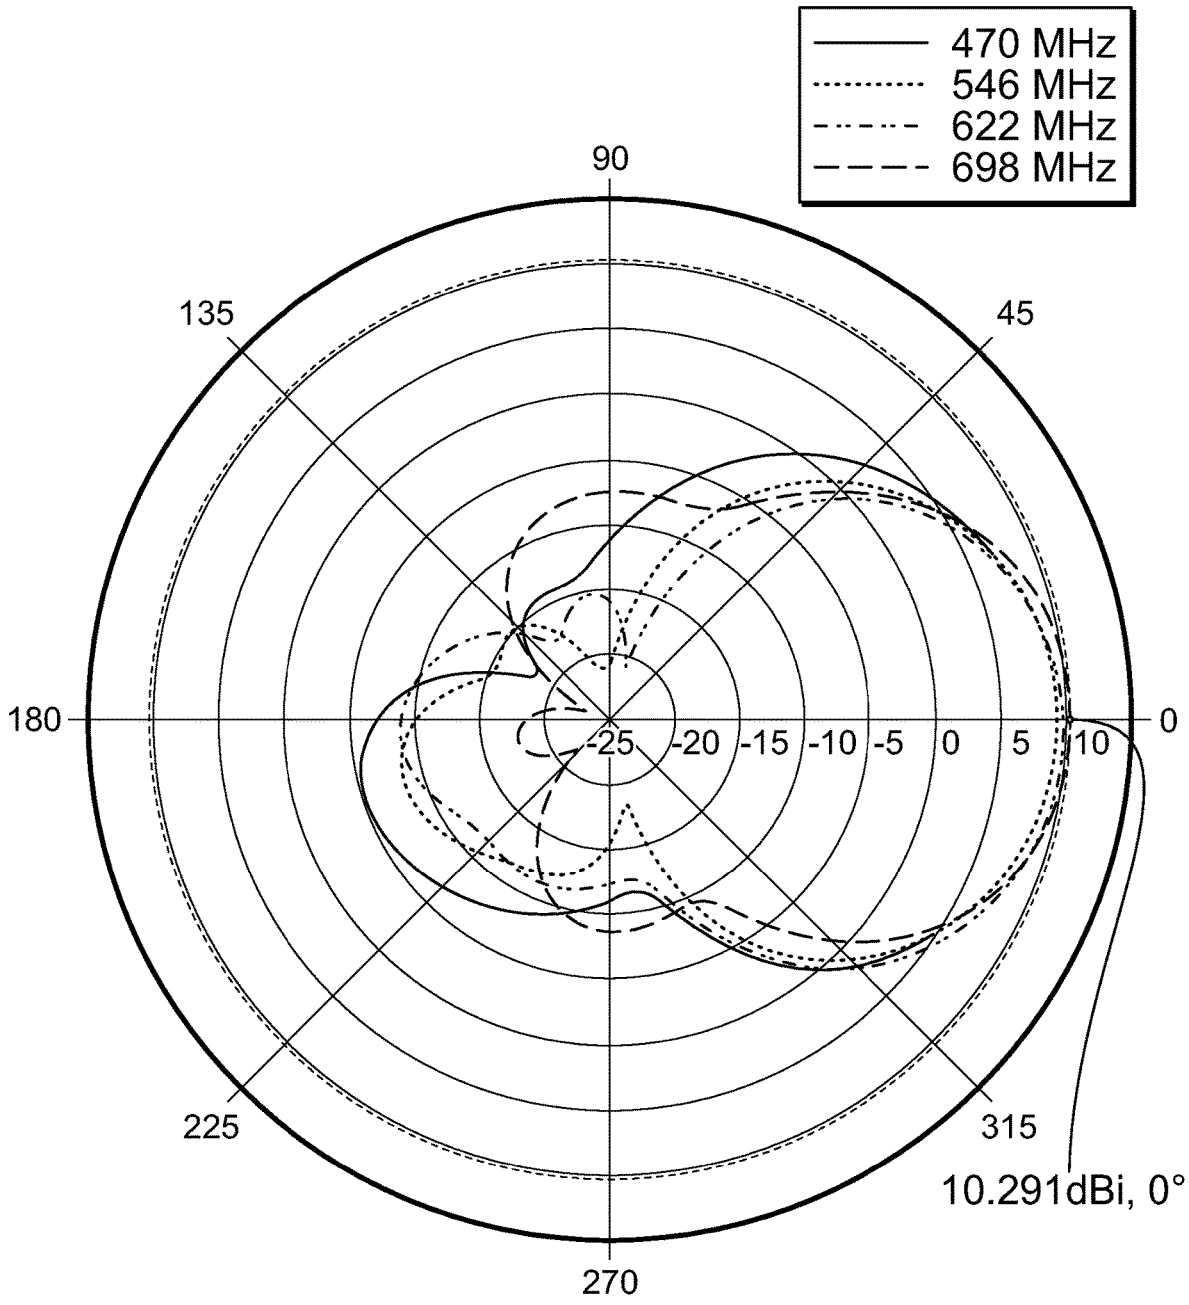

470 MHz
546 MHz
622 MHz
698 MHz
90
135
45
180
0
225
315
270
-25
-20
-15
-10
-5
0
5
10
10.291dBi, 0°

Fig. 52

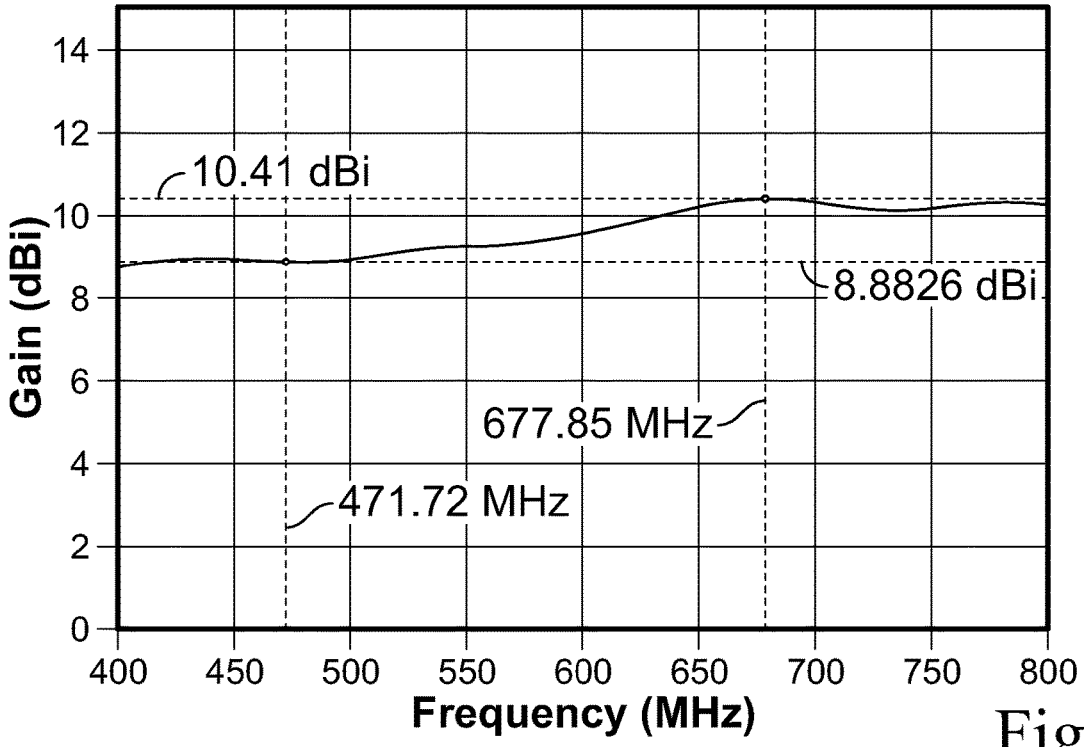

14
12
10
8
6
4
2
0
Gain (dBi)
10.41 dBi
8.8826 dBi
677.85 MHz
471.72 MHz
400
450
500
550
600
650
700
750
800
Frequency (MHz)

Fig. 53

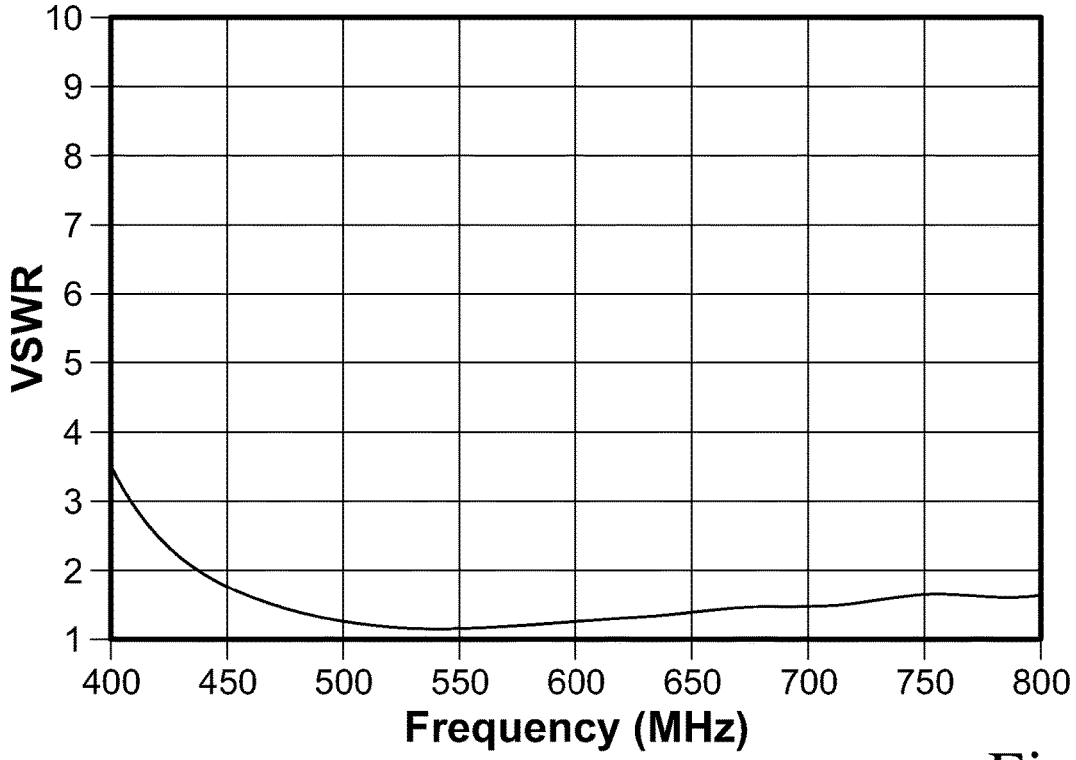

10
9
8
7
6
5
4
3
2
1
VSWR
400
450
500
550
600
650
700
750
800
Frequency (MHz)

Fig. 54

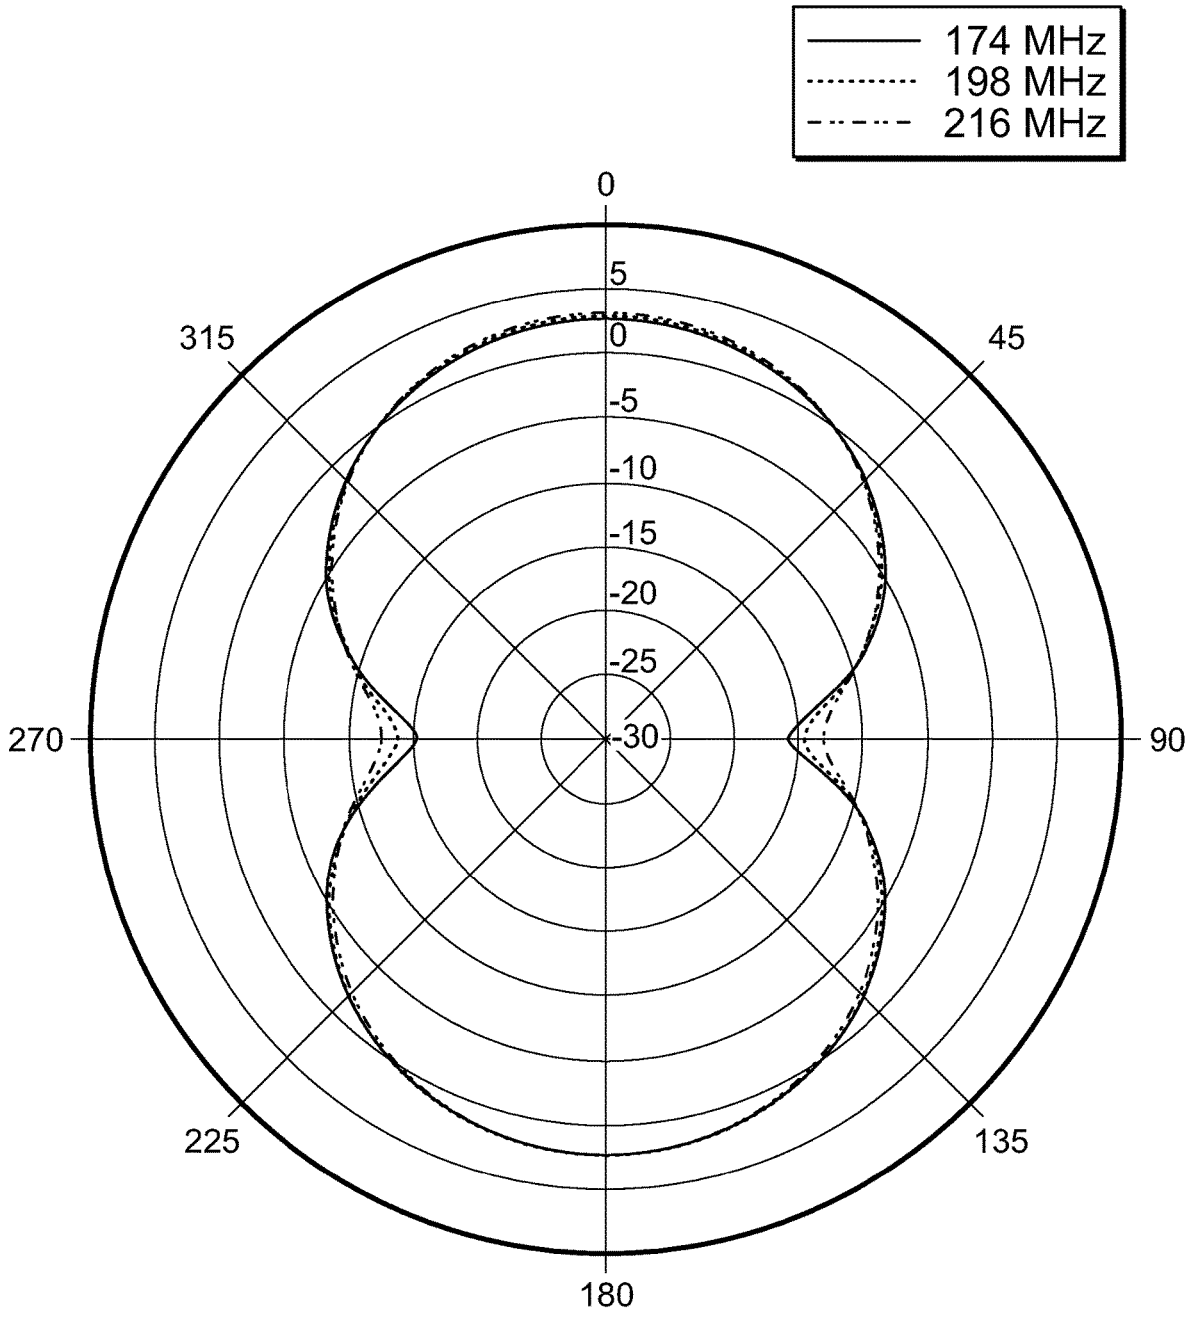

174 MHz
198 MHz
216 MHz
0
45
90
135
180
225
270
315
5
0
-5
-10
-15
-20
-25
-30

Fig. 55

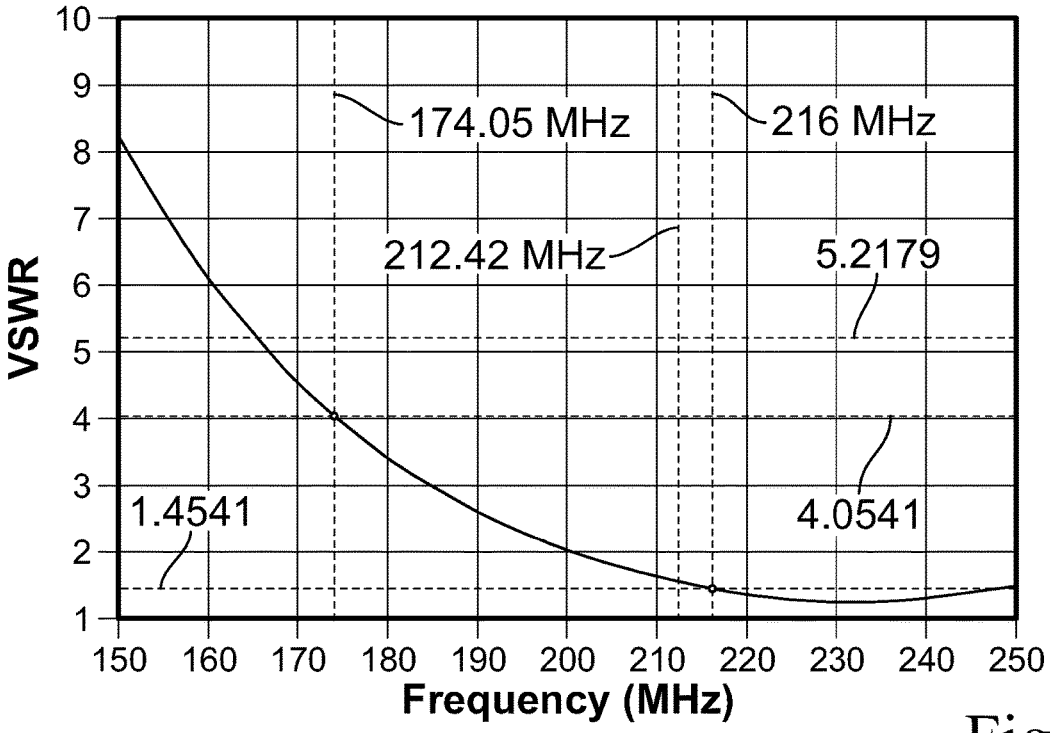

VSWR
Frequency (MHz)
174.05 MHz
216 MHz
212.42 MHz
5.2179
1.4541
4.0541
10
9
8
7
6
5
4
3
2
1
150 160 170 180 190 200 210 220 230 240 250

Fig. 56

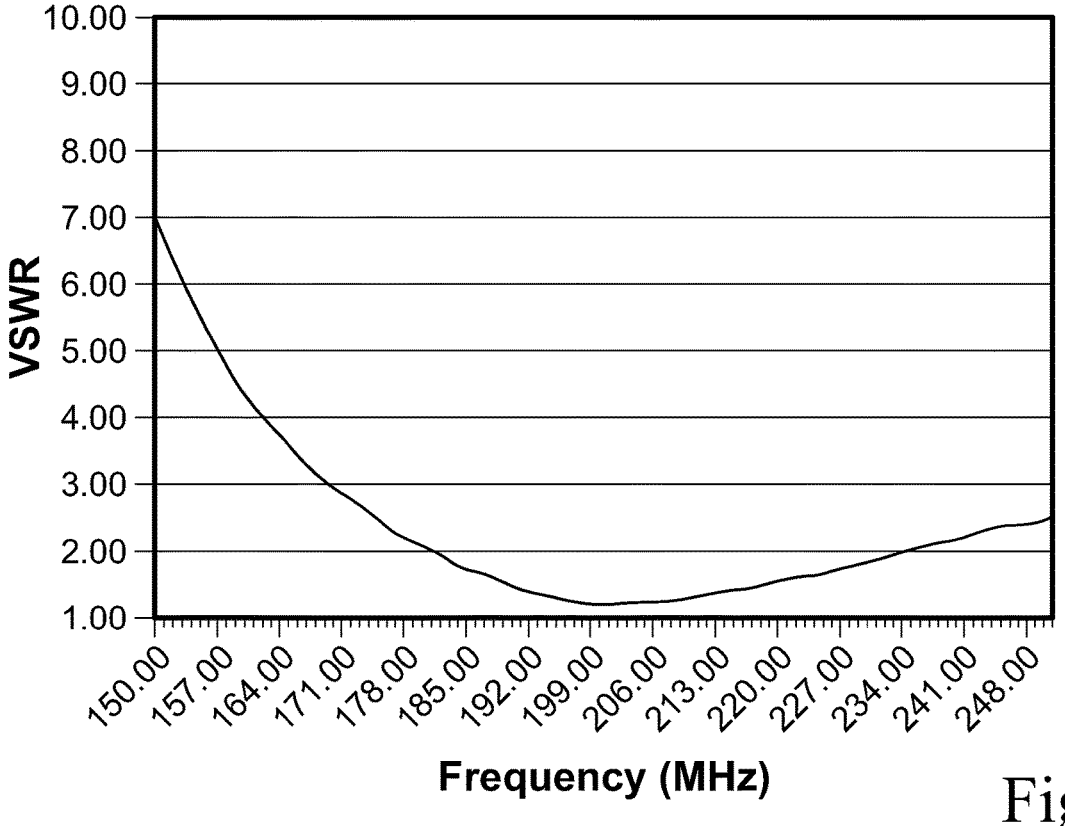

VSWR
Frequency (MHz)
10.00
9.00
8.00
7.00
6.00
5.00
4.00
3.00
2.00
1.00
150.00 157.00 164.00 171.00 178.00 185.00 192.00 199.00 206.00 213.00 220.00 227.00 234.00 241.00 248.00

Fig. 57

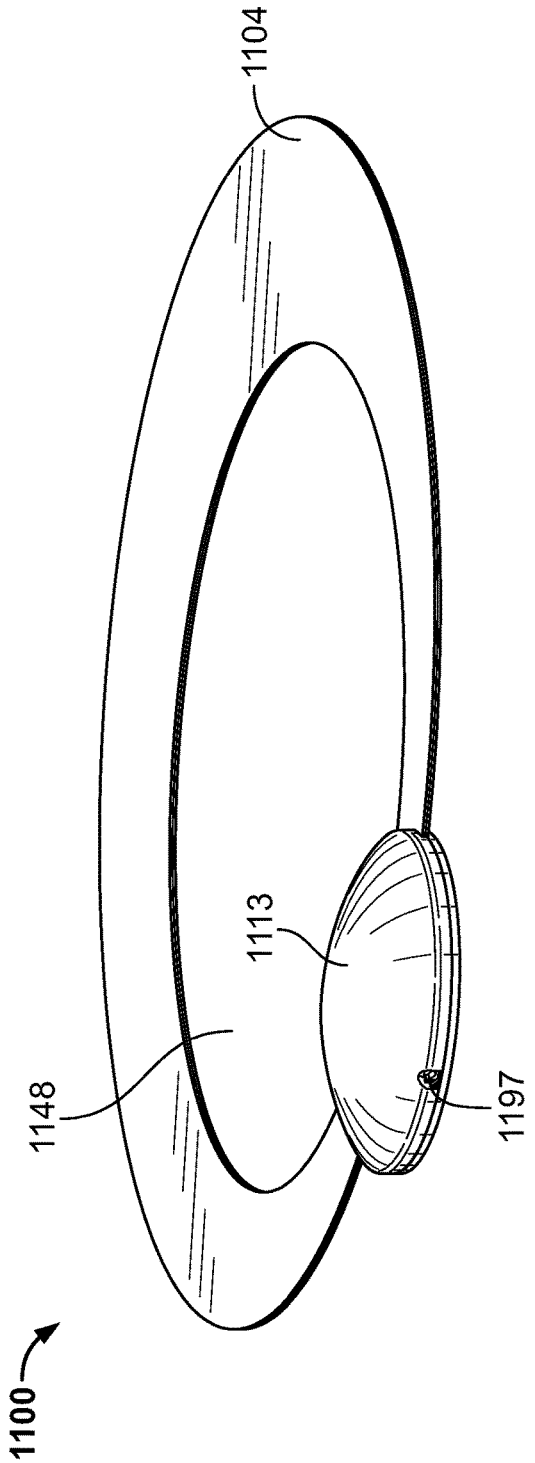


FIG. 58

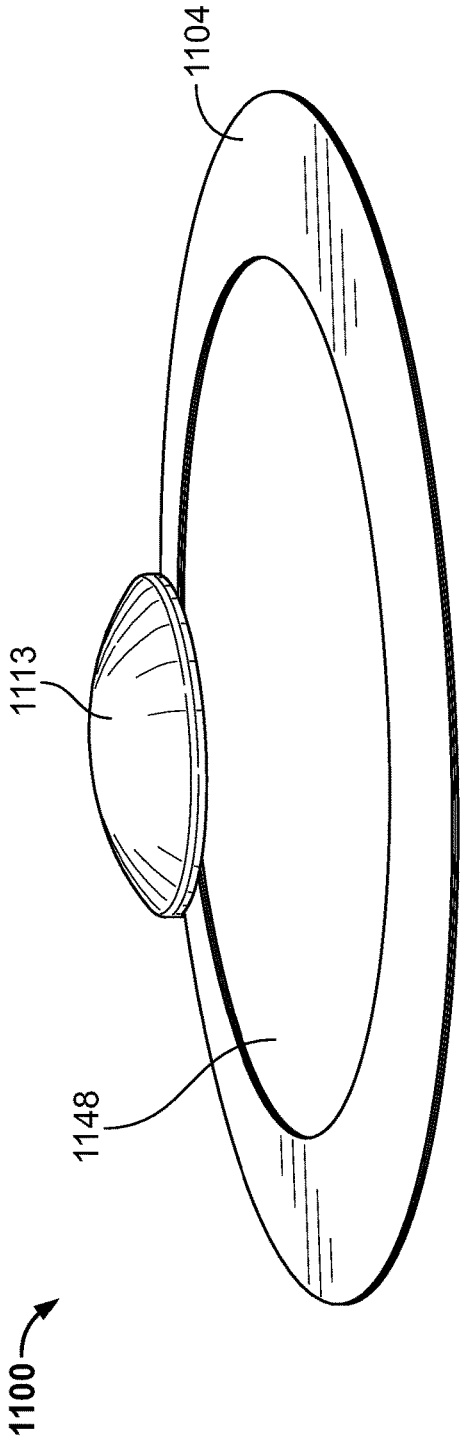


FIG. 59

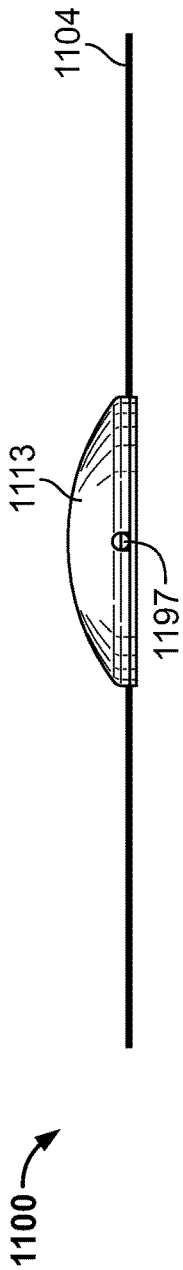


FIG. 60

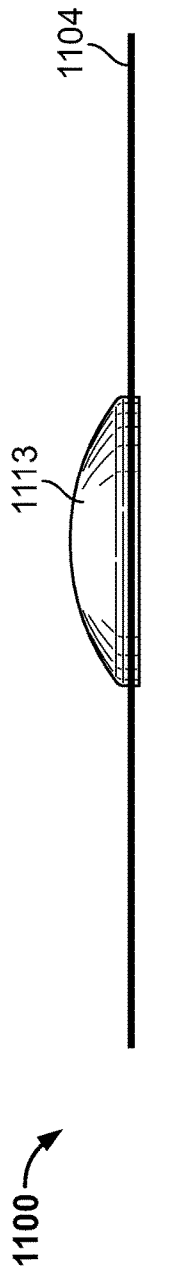


FIG. 61



FIG. 62

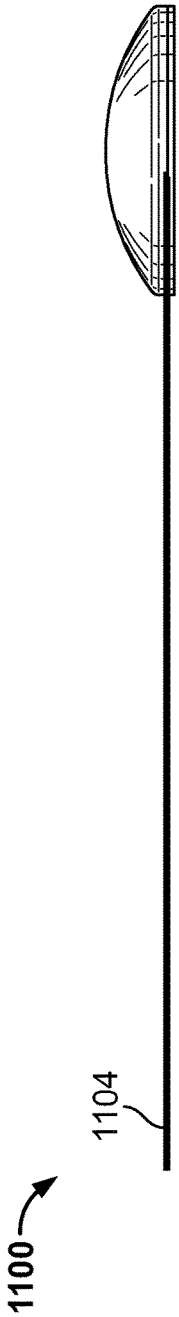


FIG. 63

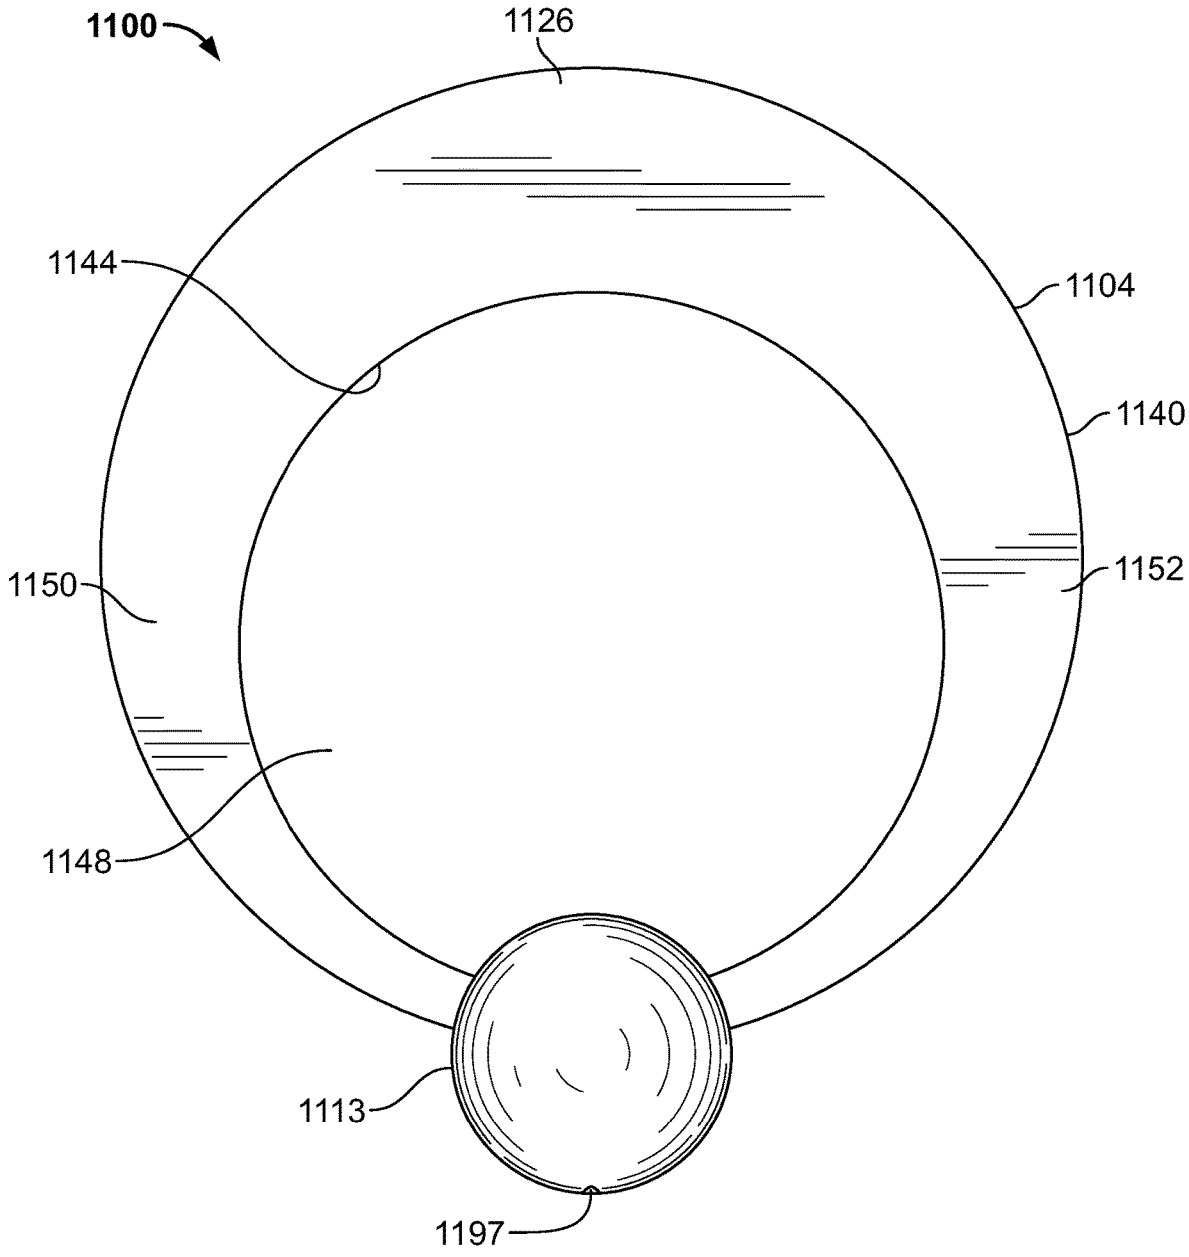


FIG. 64

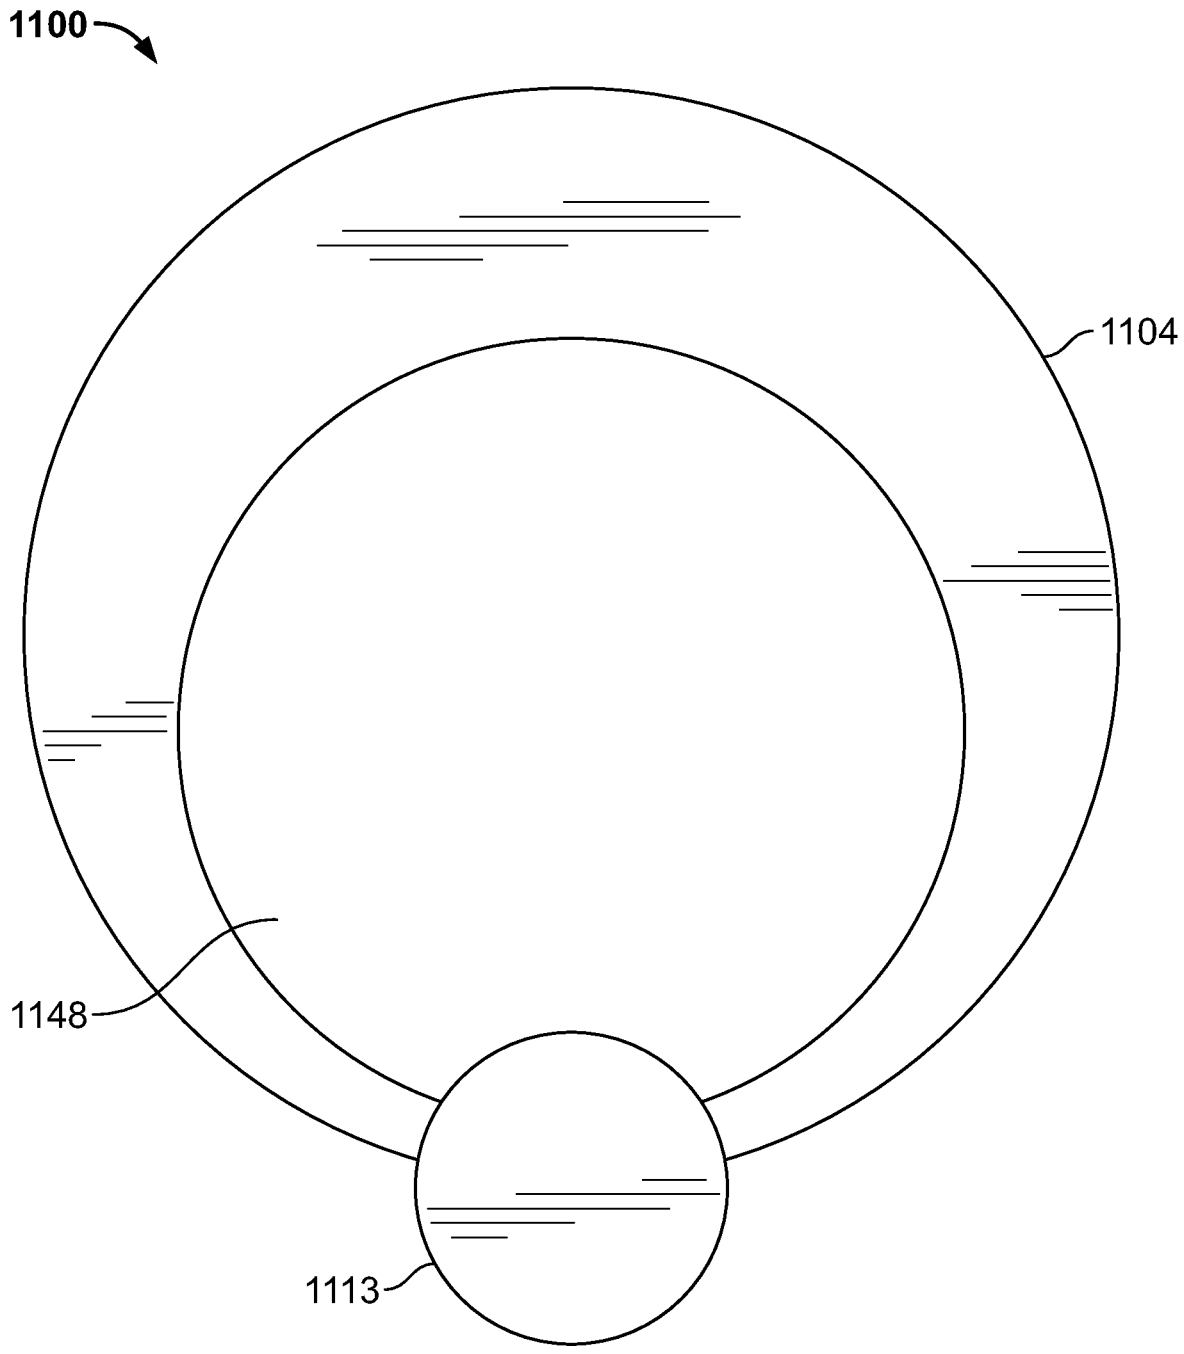


FIG. 65

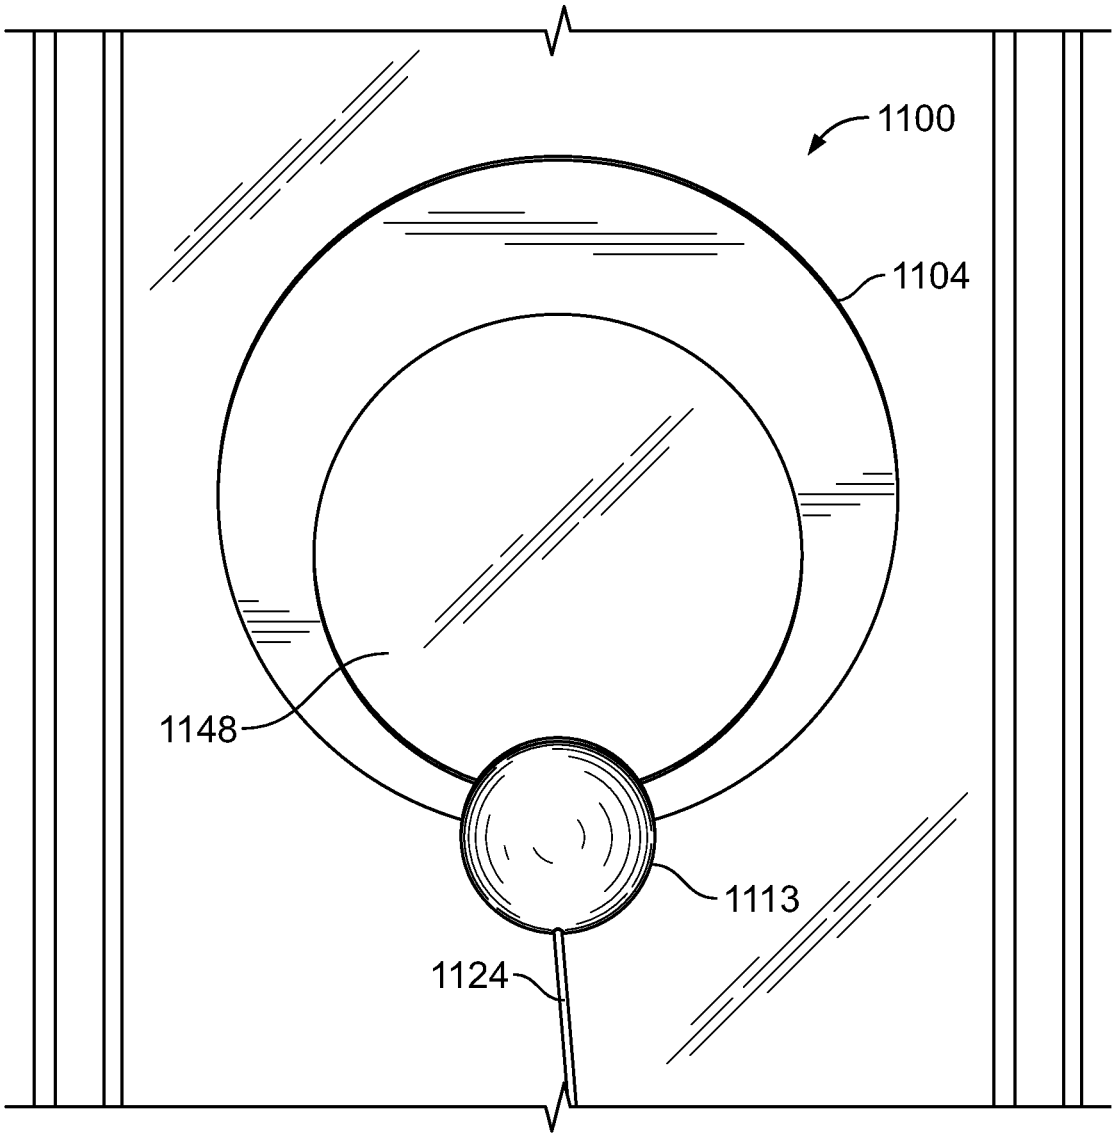


FIG. 66

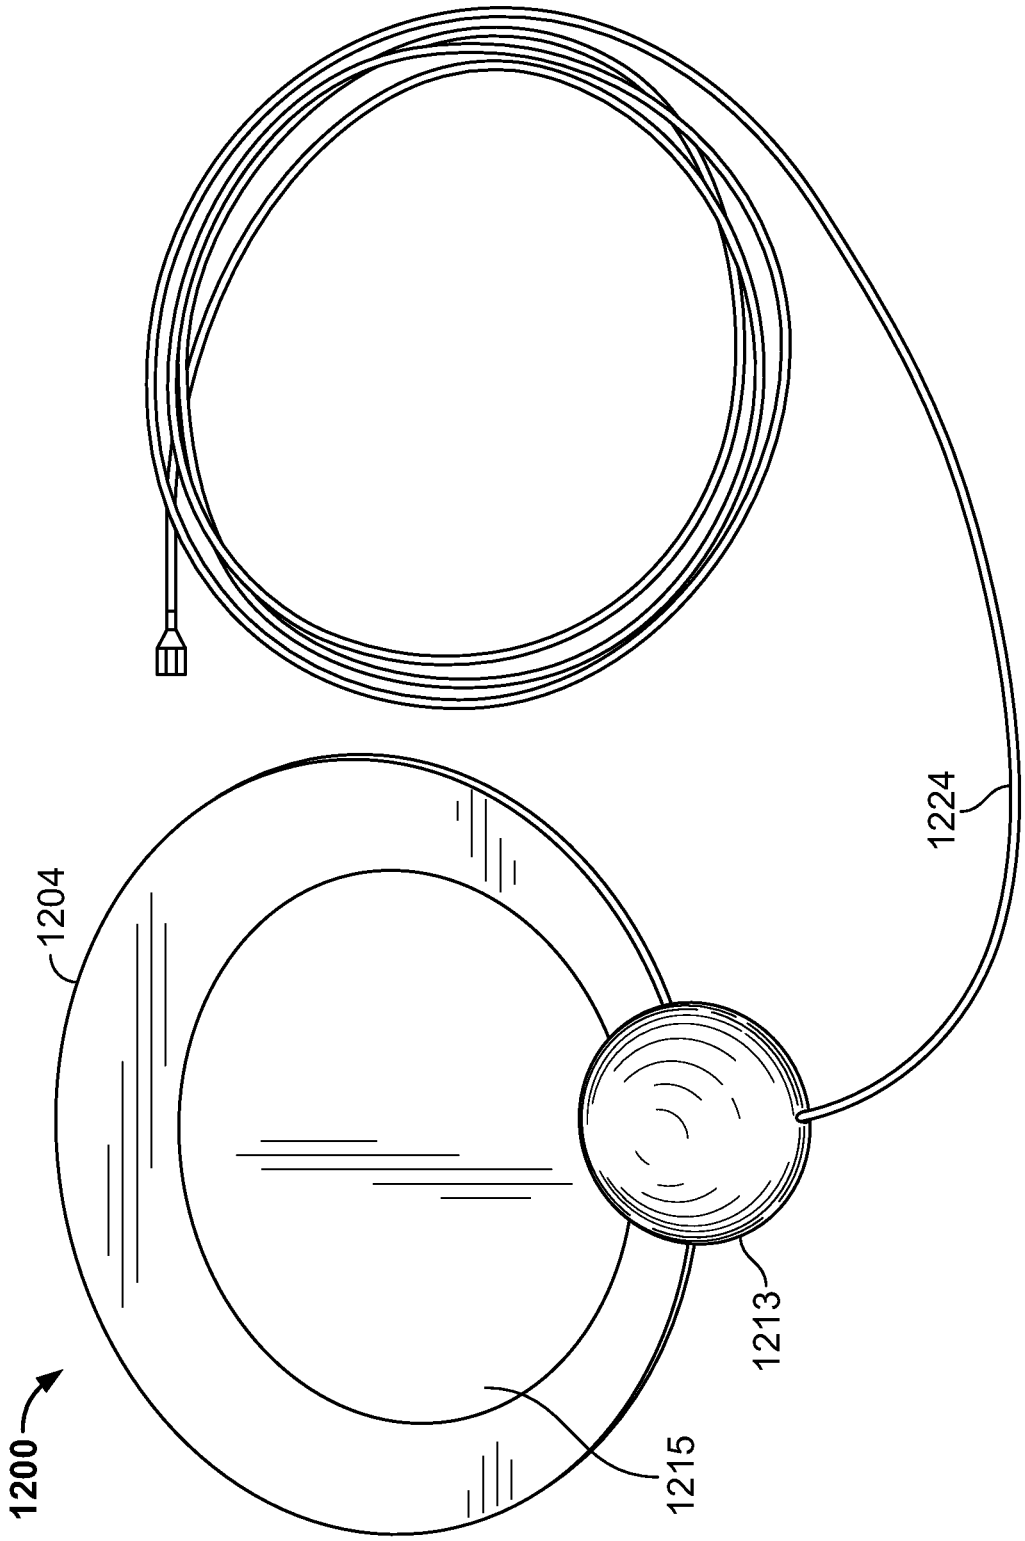


FIG. 67

ANTENNA ASSEMBLIES WITH TAPERED LOOP ANTENNA ELEMENTS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 16/840,850 filed Apr. 6, 2020 (published as US2020/0235476 on Jul. 23, 2020 and issuing as U.S. Pat. No. 11,024,968 on Jun. 1, 2021).

U.S. patent application Ser. No. 16/840,850 is a continuation of U.S. patent application Ser. No. 15/685,749 filed Aug. 24, 2017, which issued as U.S. Pat. No. 10,615,501 on Apr. 7, 2020).

U.S. patent application Ser. No. 15/685,749 is a continuation of U.S. patent application Ser. No. 14/308,422 filed Jun. 18, 2014 (now abandoned, published as US2014/0292597 on Oct. 2, 2014), which, in turn, claimed the benefit and priority of U.S. Provisional Patent Application No. 62/002,503 filed May 23, 2014.

U.S. patent application Ser. No. 14/308,422 was a continuation-in-part of the following two applications:

(1) U.S. Design patent application No. 29/430,632 filed Aug. 28, 2012 (now abandoned), which, in turn, was a continuation-in-part of U.S. Design patent application No. 29/376,791 filed Oct. 12, 2010 (now U.S. Design Pat. D666,178 issued Aug. 28, 2012); and

(2) U.S. patent application Ser. No. 13/759,750 filed Feb. 5, 2013 (now U.S. Pat. No. 8,994,600 issued Mar. 31, 2015), which, in turn, was a continuation-in-part of U.S. patent application Ser. No. 12/606,636 filed Oct. 27, 2009 (now U.S. Pat. No. 8,368,607 issued Feb. 5, 2013).

U.S. patent application Ser. No. 12/606,636 was a continuation-in-part of the following four applications:

(1) U.S. patent application Ser. No. 12/050,133 filed Mar. 17, 2008 (U.S. Pat. No. 7,609,222), which, in turn, was a continuation-in-part of U.S. patent Design patent application No. 29/304,423 filed Feb. 29, 2008 (now U.S. Design Pat. D598,433 issued Aug. 18, 2009) and also claimed the benefit of U.S. Provisional Patent Application No. 60/992,331 filed Dec. 5, 2007 and U.S. Provisional Patent Application No. 61/034,431 filed Mar. 6, 2008; and

(2) U.S. patent application Ser. No. 12/040,464 filed Feb. 29, 2008 (now U.S. Pat. No. 7,839,347 issued Nov. 23, 2010), which, in turn, claimed the benefit of U.S. Provisional Patent Application No. 60/992,331 filed Dec. 5, 2007; and

(3) U.S. Design patent application No. 29/305,294 filed Mar. 17, 2008 (now U.S. Design Pat. D598,434 issued Aug. 18, 2009), which, in turn, was a continuation-in-part of U.S. patent application Ser. No. 12/040,464 filed Feb. 29, 2008 (now U.S. Pat. No. 7,839,347 issued Nov. 23, 2010) and also a continuation of U.S. patent application Ser. No. 12/050,133 filed Mar. 17, 2008 (now U.S. Pat. No. 7,609,222 issued Oct. 29, 2009); and

(4) PCT International Application No. PCT/US08/061908 filed Apr. 29, 2008 (WO009/073249 published on Jun. 11, 2009), which, in turn, claimed priority to U.S. Provisional Patent Application No. 60/992,331 filed Dec. 5, 2007, U.S. Provisional Patent Application No. 61/034,431 filed Mar. 6, 2008, U.S. patent application Ser. No. 12/040,464 filed Feb. 29, 2008 (now U.S. Pat. No. 7,839,347 issued Nov. 23, 2010), and U.S. patent application Ser. No. 12/050,133 filed Mar. 17, 2008 (now U.S. Pat. No. 7,609,222 issued Oct. 29, 2009).

The entire disclosures of the above applications are incorporated herein by reference.

FIELD

The present disclosure generally relates to antenna assemblies configured for reception of television signals, such as high definition television (HDTV) signals.

BACKGROUND

The statements in this section merely provide background information related to the present disclosure and may not constitute prior art.

Many people enjoy watching television. Recently, the television-watching experience has been greatly improved due to high definition television (HDTV). A great number of people pay for HDTV through their existing cable or satellite TV service provider. In fact, many people are unaware that HDTV signals are commonly broadcast over the free public airwaves. This means that HDTV signals may be received for free with the appropriate antenna.

DRAWINGS

The drawings described herein are for illustration purposes only and are not intended to limit the scope of the present disclosure in any way.

FIG. **1** is an exploded perspective view of an antenna assembly including a tapered loop antenna element, a reflector, a housing (with the end pieces exploded away for clarity), and a PCB balun according to an exemplary embodiment;

FIG. **2** is a perspective view illustrating the antenna assembly shown in FIG. **1** after the components have been assembled and enclosed within the housing;

FIG. **3** is an end perspective view illustrating the tapered loop antenna element, reflector, and PCB balun shown in FIG. **1**;

FIG. **4** is a side elevation view of the components shown in FIG. **3**;

FIG. **5** is a front elevation view of the tapered loop antenna element shown in FIG. **1**;

FIG. **6** is a back elevation of the tapered loop antenna element shown in FIG. **1**;

FIG. **7** is a bottom plan view of the tapered loop antenna element shown in FIG. **1**;

FIG. **8** is a top plan view of the tapered loop antenna element shown in FIG. **1**;

FIG. **9** is a right elevation view of the tapered loop antenna element shown in FIG. **1**;

FIG. **10** is a left elevation view of the tapered loop antenna element shown in FIG. **1**;

FIG. **11** is a perspective view illustrating an exemplary use for the antenna assembly shown in FIG. **2** with the antenna assembly supported on top of a television with a coaxial cable connecting the antenna assembly to the television, whereby the antenna assembly is operable for receiving signals and communicating the same to the television via the coaxial cable;

FIG. **12** is an exemplary line graph showing computer-simulated gain/directivity and S11 versus frequency (in megahertz) for an exemplary embodiment of the antenna assembly with seventy-five ohm unbalanced coaxial feed;

FIG. **13** is a view of another exemplary embodiment of an antenna assembly having two tapered loop antenna elements, a reflector, and a PCB balun;

FIG. **14** is a view of another exemplary embodiment of an antenna assembly having a tapered loop antenna element and a support, and also showing the antenna assembly supported on top of a desk or table top;

FIG. **15** is a perspective view of the antenna assembly shown in FIG. **14**;

FIG. **16** is a perspective view of another exemplary embodiment of an antenna assembly having a tapered loop antenna element and an indoor wall mount/support, and also showing the antenna assembly mounted to a wall;

FIG. **17** is a perspective view of another exemplary embodiment of an antenna assembly having a tapered loop antenna element and a support, and showing the antenna assembly mounted outdoors to a vertical mast or pole;

FIG. **18** is another perspective view of the antenna assembly shown in FIG. **17**;

FIG. **19** is a perspective view of another exemplary embodiment of an antenna assembly having two tapered loop antenna elements and a support, and showing the antenna assembly mounted outdoors to a vertical mast or pole;

FIG. **20** is an exemplary line graph showing computer-simulated directivity and S11 versus frequency (in megahertz) for the antenna assembly shown in FIG. **13** according to an exemplary embodiment;

FIG. **21** is a perspective view of another exemplary embodiment of an antenna assembly configured for reception of VHF signals;

FIG. **22** is a front view of the antenna assembly shown in FIG. **21**;

FIG. **23** is a top view of the antenna assembly shown in FIG. **21**;

FIG. **24** is a side view of the antenna assembly shown in FIG. **21**;

FIG. **25** is an exemplary line graph showing computer-simulated directivity and VSWR (voltage standing wave ratio) versus frequency (in megahertz) for the antenna assembly shown in FIGS. **21** through **24** according to an exemplary embodiment;

FIG. **26** is a perspective view of another exemplary embodiment of an antenna assembly having a tapered loop antenna element and a support that is rotatably convertible between a first configuration (shown in FIG. **26**) for supporting the antenna assembly on a horizontal surface and a second configuration (shown in FIG. **27**) for supporting the antenna assembly from a vertical surface;

FIG. **27** is a perspective view of the antenna assembly shown in FIG. **26** but after the rotatably convertible support has been rotated to the second configuration for supporting the antenna assembly form a vertical surface;

FIG. **28** is an exploded perspective view of the antenna assembly shown in FIGS. **26** and **27** and illustrating the threaded stem portion and stopping members for retaining the rotatably convertible support in the first or second configuration;

FIG. **29** is another exploded perspective view of the antenna assembly shown in FIGS. **26** and **27**;

FIG. **30** is a right side view of the antenna assembly shown in FIG. **26** with the rotatably convertible support shown in the first configuration for supporting the antenna assembly on a horizontal surface;

FIG. **31** is a left side view of the antenna assembly shown in FIG. **26**;

FIG. **32** is a front view of the antenna assembly shown in FIG. **26**;

FIG. **33** is a back view of the antenna assembly shown in FIG. **26**;

FIG. **34** is an upper back perspective view of the antenna assembly shown in FIG. **26**;

FIG. **35** is a top view of the antenna assembly shown in FIG. **26**;

FIG. **36** is a bottom view of the antenna assembly shown in FIG. **26**;

FIG. **37** is a right side view of the antenna assembly shown in FIG. **27** with the rotatably convertible support shown in the second configuration for supporting the antenna assembly from a vertical surface;

FIG. **38** is a left side view of the antenna assembly shown in FIG. **27**;

FIG. **39** is a front view of the antenna assembly shown in FIG. **27**;

FIG. **40** is a back view of the antenna assembly shown in FIG. **27**;

FIG. **41** is a top view of the antenna assembly shown in FIG. **27**;

FIG. **42** is a bottom view of the antenna assembly shown in FIG. **27**;

FIG. **43** is a perspective view of another exemplary embodiment of an antenna assembly having a tapered loop antenna element and a support that is rotatably convertible between a first configuration for supporting the antenna assembly on a horizontal surface and a second configuration for supporting the antenna assembly from a vertical surface, where the rotatably convertible support is shown in the first configuration with a reflector mounted within a slot or groove of the rotatably convertible support;

FIG. **44** is a left side view of the antenna assembly shown in FIG. **43**;

FIG. **45** is a front perspective view of the antenna assembly shown in FIG. **43** with the tapered loop antenna element removed from the support and illustrating the reflector mounted within the slot of the support;

FIG. **46** is a top view of the support of the antenna assembly shown in FIG. **43** with the threaded stem portion removed;

FIG. **47** is a bottom view of the support of the antenna assembly shown in FIG. **43**;

FIG. **48** is a perspective view of another exemplary embodiment of an antenna assembly having two tapered loop antenna elements and a reflector, where the antenna assembly further includes a VHF dipole and an integrated UHF balun diplexer internal to the UHF antenna;

FIG. **49** is a back perspective view of the antenna assembly shown in FIG. **48**;

FIG. **50** is a perspective view of the antenna assembly shown in FIG. **48** shown mounted to a mast and a mast base for free-standing indoor use according to an exemplary embodiment.

FIG. **51** is an exemplary line graph showing UHF computer-simulated gain (in decibels referenced to isotropic gain (dBi)) versus azimuth angle at various frequencies (in megahertz (MHz)) for the antenna assembly shown in FIG. **48**;

FIG. **52** is an exemplary line graph showing UHF computer-simulated gain (dBi) versus elevation angle at various frequencies (MHz) for the antenna assembly shown in FIG. **48**;

FIG. **53** is an exemplary line graph showing UHF boresight gain (dBi) versus frequency (MHz) for the antenna assembly shown in FIG. **48**;

FIG. **54** is an exemplary line graph showing UHF computer-simulated voltage standing wave ratio (VSWR) versus frequency (MHz) for the antenna assembly shown in FIG. **48**;

FIG. **55** is an exemplary line graph showing VHF element computer-simulated gain (dBi) versus azimuth angle at various frequencies (MHz) for the antenna assembly shown in FIG. **48**;

FIG. **56** is an exemplary line graph showing VHF element computer-simulated gain (dBi) versus elevation angle at various frequencies (MHz) for the antenna assembly shown in FIG. **48**;

FIG. **57** is an exemplary line graph showing VHF element boresight gain (dBi) versus frequency (MHz) for the antenna assembly shown in FIG. **48**;

FIG. **58** is a perspective view of another exemplary embodiment of an antenna assembly having a tapered loop antenna element;

FIG. **59** is another perspective view of the antenna assembly shown in FIG. **58**;

FIG. **60** is a bottom view of the antenna assembly shown in FIG. **58**;

FIG. **61** is a top view of the antenna assembly shown in FIG. **58**;

FIG. **62** is a right side view of the antenna assembly shown in FIG. **58**;

FIG. **63** is a left side view of the antenna assembly shown in FIG. **58**;

FIG. **64** is a front view of the antenna assembly shown in FIG. **58**;

FIG. **65** is a bottom view of the antenna assembly shown in FIG. **58**;

FIG. **66** shows the antenna assembly of FIG. **58** mounted to a window according to an exemplary embodiment; and

FIG. **67** illustrates another exemplary embodiment of an antenna assembly having a tapered loop antenna element.

DETAILED DESCRIPTION

The following description is merely exemplary in nature and is in no way intended to limit the present disclosure, application, or uses.

FIGS. **1** through **4** illustrate an exemplary antenna assembly **100** embodying one or more aspects of the present disclosure. As shown in FIG. **1**, the antenna assembly **100** generally includes a tapered loop antenna element **104** (also shown in FIGS. **5** through **10**), a reflector element **108**, a balun **112**, and a housing **116** with removable end pieces or portions **120**.

As shown in FIG. **11**, the antenna assembly **100** may be used for receiving digital television signals (of which high definition television (HDTV) signals are a subset) and communicating the received signals to an external device, such as a television. In the illustrated embodiment, a coaxial cable **124** (FIGS. **2** and **11**) is used for transmitting signals received by the antenna assembly **100** to the television (FIG. **11**). The antenna assembly **100** may also be positioned on other generally horizontal surfaces, such as a tabletop, coffee tabletop, desktop, shelf, etc.). Alternative embodiments may include an antenna assembly positioned elsewhere and/or supported using other means.

In one example, the antenna assembly **100** may include a 75-ohm RG6 coaxial cable **124** fitted with an F-Type connector (although other suitable communication links may also be employed). Alternative embodiments may include other coaxial cables or other suitable communication links.

As shown in FIGS. **3**, **5**, and **6**, the tapered loop antenna element **104** has a generally annular shape cooperatively defined by an outer periphery or perimeter portion **140** and an inner periphery or perimeter portion **144**. The outer periphery or perimeter portion **140** is generally circular. The inner periphery or perimeter portion **144** is also generally circular, such that the tapered loop antenna element **104** has a generally circular opening **148**.

In some embodiments, the tapered loop antenna element has an outer diameter of about two hundred twenty millimeters and an inner diameter of about eighty millimeters. Some embodiments include the inner diameter being offset from the outer diameter such that the center of the circle defined generally by the inner perimeter portion **144** (the inner diameter's midpoint) is about twenty millimeters below the center of the circle defined generally by the outer perimeter portion **140** (the outer diameter's midpoint). Stated differently, the inner diameter may be offset from the outer diameter such that the inner diameter's midpoint is about twenty millimeters below the outer diameter's midpoint. The offsetting of the diameters thus provides a taper to the tapered loop antenna element **104** such that it has at least one portion (a top portion **126** shown in FIGS. **3**, **5**, and **6**) wider than another portion (the end portions **128** shown in FIGS. **3**, **5**, and **6**). The taper of the tapered loop antenna element **104** has been found to improve performance and aesthetics. As shown by FIGS. **1**, **3**, **5**, and **6**, the tapered loop antenna element **104** includes first and second halves or curved portions **150**, **152** that are generally symmetric such that the first half or curved portion **150** is a mirror-image of the second half or curved portion **152**. Each curved portion **150**, **152** extends generally between a corresponding end portion **128** and then tapers or gradually increases in width until the middle or top portion **126** of the tapered loop antenna element **104**. The tapered loop antenna element **104** may be positioned with the housing **116** in an orientation such that the wider portion **126** of the tapered loop antenna element **104** is at the top and the narrower end portions **128** are at the bottom.

With continued reference to FIGS. **3**, **5**, and **6**, the tapered loop antenna element **104** includes spaced-apart end portions **128**. In one particular example, the end portions **128** of the tapered loop antenna element **104** are spaced apart a distance of about 2.5 millimeters. Alternative embodiments may include an antenna element with end portions spaced apart greater than or less than 2.5 millimeters. For example, some embodiments include an antenna element with end portions spaced apart a distance of between about 2 millimeters to about 5 millimeters. The spaced-apart end portions may define an open slot therebetween that is operable to provide a gap feed for use with a balanced transmission line.

The end portions **128** include fastener holes **132** in a pattern corresponding to fastener holes **136** of the PCB balun **112**. Accordingly, mechanical fasteners (e.g., screws, etc.) may be inserted through the fastener holes **132**, **136** after they are aligned, for attaching the PCB balun **112** to the tapered loop antenna element **104**. Alternative embodiments may have differently configured fastener holes (e.g., more or less, different shapes, different sizes, different locations, etc.). Still other embodiments may include other attachment methods (e.g., soldering, etc.).

As shown in FIGS. **4** and **7-10**, the illustrated tapered loop antenna element **104** is substantially planar with a generally constant or uniform thickness. In one exemplary embodiment, the tapered loop antenna element **104** has a thickness of about 3 millimeters. Other embodiments may include a thicker or thinner antenna element. For example, some

embodiments may include an antenna element with a thickness of about 35 micrometers (e.g., 1 oz. copper, etc.), where the antenna element is mounted, supported, or installed on a printed circuit board. Further embodiments may include a free-standing, self-supporting antenna element made from aluminum, anodized aluminum, copper, etc. having a thickness between about 0.5 millimeters to about 5 millimeters, etc. In another exemplary embodiment, the antenna element comprises a relatively thin aluminum foil that is encased in a supporting plastic enclosure, which has been used to reduce material costs associated with the aluminum.

Alternative embodiments may include an antenna element that is configured differently than the tapered loop antenna element **104** shown in the figures. For example, other embodiments may include a non-tapered loop antenna element having a centered (not offset) opening. Additional embodiments may include a loop antenna element that defines a full generally circular loop or hoop without spaced-apart free end portions **128**. Further embodiments may include an antenna element having an outer periphery/perimeter portion, inner periphery/perimeter portion, and/or opening sized or shaped differently, such as with a non-circular shape (e.g., ovular, triangular, rectangular, etc.). The antenna element **104** (or any portion thereof) may also be provided in various configurations (e.g., shapes, sizes, etc.) depending at least in part on the intended end-use and signals to be received by the antenna assembly.

The antenna element **104** may be made from a wide range of materials, which are preferably good conductors (e.g., metals, silver, gold, aluminum, copper, etc.). By way of example only, the tapered loop antenna element **104** may be formed from a metallic electrical conductor, such as aluminum (e.g., anodized aluminum, etc.), copper, stainless steel, other metals, other alloys, etc. In another embodiment, the tapered loop antenna element **104** may be stamped from sheet metal, or created by selective etching of a copper layer on a printed circuit board substrate.

FIGS. **1**, **3**, and **4** illustrate the exemplary reflector **108** that may be used with the antenna assembly **100**. As shown in FIG. **3**, the reflector **108** includes a generally flat or planar surface **160**. The reflector **108** also includes baffle, lip, or sidewall portions **164** extending outwardly relative to the surface **160**. The reflector **108** may be generally operable for reflecting electromagnetic waves generally towards the tapered loop antenna element **104**.

In regard to the size of the reflector and the spacing to the antenna element, the inventors hereof note the following. The size of the reflector and the spacing to the antenna element strongly impact performance. Placing the antenna element too close to the reflector provides an antenna with good gain, but narrows impedance bandwidth and poor VSWR (voltage standing wave ratio). Despite the reduced size, such designs are not suitable for the intended broadband application. If the antenna element is placed too far away from the reflector, the gain is reduced due to improper phasing. When the antenna element size and proportions, reflector size, baffle size, and spacing between antenna element and reflector are properly chosen, there is an optimum configuration that takes advantage of the near zone coupling with the electrically small reflector element to produce enhanced impedance bandwidth, while mitigating the effects of phase cancellation. The net result is an exemplary balance between impedance bandwidth, directivity or gain, radiation efficiency, and physical size.

In this illustrated embodiment, the reflector **108** is generally square with four perimeter sidewall portions **164**. Alternative embodiments may include a reflector with a different configuration (e.g., differently shaped, sized, less sidewall portions, etc.). The sidewalls may even be reversed so as to point opposite the antenna element. The contribution of the sidewalls is to slightly increase the effective electrical size of the reflector and improve impedance bandwidth.

Dimensionally, the reflector **108** of one exemplary embodiment has a generally square surface **160** with a length and width of about 228 millimeters. Continuing with this example, the reflector **108** may also have perimeter sidewall portions **164** each with a height of about 25.4 millimeters relative to the surface **160**. The dimensions provided in this paragraph (as are all dimensions set forth herein) are mere examples provided for purposes of illustration only, as any of the disclosed antenna components herein may be configured with different dimensions depending, for example, on the particular application and/or signals to be received or transmitted by the antenna assembly. For example, another embodiment may include a reflector **108** having a baffle, lip, or perimeter sidewall portions **164** having a height of about ten millimeters. Another embodiment may have the reflector **108** having a baffle, lip in the opposite direction to the antenna element. In such embodiment, it is possible to also add a top to the open box, which may serve as a shielding enclosure for a receiver board or other electronics.

With further reference to FIG. **3**, cutouts, openings, or notches **168** may be provided in the reflector's perimeter sidewall portions **164** to facilitate mounting of the reflector **108** within the housing **116** and/or attachment of the housing end pieces **120**. In an exemplary embodiment, the reflector **108** may be slidably positioned within the housing **116** (FIG. **1**). The fastener holes **172** of the housing end pieces **120** may be aligned with the reflector's openings **168**, such that fasteners may be inserted through the aligned openings **168**, **172**. Alternative embodiments may have reflectors without such openings, cutouts, or notches.

FIGS. **1**, **3**, and **4** illustrate an exemplary balun **112** that may be used with the antenna assembly **100** for converting a balanced line into an unbalanced line. In the illustrated embodiment, the antenna assembly **100** includes a printed circuit board having the balun **112**. The PCB having the balun **112** may be coupled to the tapered loop antenna element **104** via fasteners and fastener holes **132** and **136** (FIG. **3**). Alternative embodiments may include different means for connecting the balun **112** to the tapered loop antenna elements and/or different types of transformers besides the printed circuit board balun **112**.

As shown in FIG. **1**, the housing **116** includes end pieces **120** and a middle portion **180**. In this particular example, the end pieces **120** are removably attached to middle portion **180** by way of mechanical fasteners, fastener holes **172**, **174**, and threaded sockets **176**. Alternative embodiments may include a housing with an integrally-formed, fixed end piece. Other embodiments may include a housing with one or more removable end pieces that are snap-fit, friction fit, or interference fit with the housing middle portion without requiring mechanical fasteners.

As shown in FIG. **2**, the housing **116** is generally U-shaped with two spaced-apart upstanding portions or members **184** connected by a generally horizontal member or portion **186**. The members **184**, **186** cooperatively define a generally U-shaped profile for the housing **116** in this embodiment.

As shown by FIG. **1**, the tapered loop antenna element **104** may be positioned in a different upstanding member **184** than the upstanding member **184** in which the reflector **108** is positioned. In one particular example, the housing **116** is

configured (e.g., shaped, sized, etc.) such that the tapered loop antenna element **104** is spaced apart from the reflector **108** by about 114.4 millimeters when the tapered loop antenna element **104** and reflector **108** are positioned into the respective different sides of the housing **116**. In addition, the housing **116** may be configured such that the housing's side portions **184** are generally square with a length and a width of about 25.4 centimeters. Accordingly, the antenna assembly **100** may thus be provided with a relatively small overall footprint. These shapes and dimensions are provided for purposes of illustration only, as the specific configuration (e.g., shape, size, etc.) of the housing may be changed depending, for example, on the particular application.

The housing **116** may be formed from various materials. In some embodiments, the housing **116** is formed from plastic. In those embodiments in which the antenna assembly is intended for use as an outdoor antenna, the housing may be formed from a weather resistant material (e.g., waterproof and/or ultra-violet resistant material, etc.). In addition, the housing **116** (or bottom portion thereof) may also be formed from a material so as to provide the bottom surface of the housing **116** with a relatively high coefficient of friction. This, in turn, would help the antenna assembly **100** resist sliding relative to the surface (e.g., top surface of television as shown in FIG. **11**, etc.) supporting the assembly **100**.

In some embodiments, the antenna assembly may also include a digital tuner/converter (ATSC receiver) built into or within the housing. In these exemplary embodiments, the digital tuner/converter may be operable for converting digital signals received by the antenna assembly to analog signals. In one exemplary example, a reflector with a reversed baffle and cover may serve as a shielded enclosure for the ATSC receiver. The shielded box reduces the effects of radiated or received interference upon the tuner circuitry. Placing the tuner in this enclosure conserves space and eliminates (or reduces) the potential for coupling between the antenna element and the tuner, which may otherwise negatively impact antenna impedance bandwidth and directivity.

In various embodiments, the antenna assembly **100** is tuned (and optimized in some embodiments) to receive signals having a frequency associated with high definition television (HDTV) within a frequency range of about 470 megahertz and about 690 megahertz. In such embodiments, narrowly tuning the antenna assembly **100** for receiving these HDTV signals allows the antenna element **104** to be smaller and yet still function adequately. With its smaller discrete physical size, the overall size of the antenna assembly **100** may be reduced so as to provide a reduced footprint for the antenna assembly **100**, which may, for example, be advantageous when the antenna assembly **100** is used indoors and placed on top of a television (e.g., FIG. **11**, etc.).

Exemplary operational parameters of the antenna assembly **100** will now be provided for purposes of illustration only. These operational parameters may be changed for other embodiments depending, for example, on the particular application and signals to be received by the antenna assembly.

In some embodiments, the antenna assembly **100** may be configured so as to have operational parameters substantially as shown in FIG. **12**, which illustrates computer-simulated gain/directivity and S11 versus frequency (in megahertz) for an exemplary embodiment of the antenna assembly **100** with seventy-five ohm unbalanced coaxial feed. In other embodiments, a 300 ohm balanced twin lead may be used.

FIG. **12** generally shows that the antenna assembly **100** has a relatively flat gain curve from about 470 MHz to about 698 MHz. In addition, FIG. **12** also shows that the antenna assembly **100** has a maximum gain of about 8 dBi (decibels referenced to isotropic gain) and an output with an impedance of about 75 Ohms.

In addition, FIG. **12** also shows that the S11 is below −6 dB across the frequency band from about 470 MHz to about 698 MHz. Values of S11 below this value ensure that the antenna is well matched and operates with high efficiency.

In addition, an antenna assembly may also be configured with fairly forgiving aiming. In such exemplary embodiments, the antenna assembly would thus not have to be re-aimed or redirected each time the television channel was changed.

FIG. **13** illustrates another embodiment of an antenna assembly **200** embodying one or more aspects of the present disclosure. In this illustrated embodiment, the antenna assembly **200** includes two generally side-by-side tapered loop antenna elements **204**A and **204**B in a generally figure eight configuration (as shown in FIG. **13**). In this exemplary embodiment, the two loops **204**A and **204**B are arranged one opposite to the other such that a gap is maintained between each pair of opposite spaced apart end portions of each loop **204**A, **204**B. The gap or open slot may be used to provide a gap feed for use with a balanced transmission line. In operation, this gap feed configuration allows the vertical going electrical current components to effectively cancel each other out such that antenna assembly **200** has relatively pure H polarization at the passband frequencies and exhibits very low levels of cross polarized signals.

The antenna assembly **200** also includes a reflector **208** and a printed circuit board balun **212**. The antenna assembly **200** may be provided with a housing similar to or different than housing **116**. Other than having two tapered loop antenna elements **204**A, **204**B (and improved antenna range that may be achieved thereby), the antenna assembly **200** may be operable and configured similar to the antenna assembly **100** in at least some embodiments thereof. FIG. **20** is an exemplary line graph showing computer-simulated directivity and S11 versus frequency (in megahertz) for the antenna assembly **200** according to an exemplary embodiment.

FIGS. **14** through **19** and **26** through **42** show additional exemplary embodiments of antenna assemblies embodying one or more aspects of the present disclosure. For example, FIGS. **14** and **15** show an antenna assembly **300** having a tapered loop antenna element **304** and a support **388**. In this exemplary embodiment, the antenna assembly **300** is supported on a horizontal surface **390**, such as the top surface of a desk, table top, television, etc. The antenna assembly **300** may also include a printed circuit board balun **312**. In some embodiments, an antenna assembly may include a tapered loop antenna element (e.g., **304**, **404**, **504**, etc.) with openings (e.g., holes, indents, recesses, voids, dimples, etc.) along the antenna element's middle portion and/or first and second curved portions, where the openings may be used, for example, to help align and/or retain the antenna element to a support. For example, a relatively thin metal antenna element with such openings may be supported by a plastic support structure that has protuberances, nubs, or protrusions that align with and are frictionally received within the openings of the antenna element, whereby the frictional engagement or snap fit helps retain the antenna element to the plastic support structure.

As another example, FIG. **16** shows an antenna assembly **400** having a tapered loop antenna element **404** and an

indoor wall mount/support **488**. In this example, the antenna assembly is mounted to a vertical surface **490**, such a wall, etc. The antenna assembly **400** may also include a printed circuit board balun. The balun, however, is not illustrated in FIG. **10** because it is obscured by the support **488**.

FIGS. **26** through **42** illustrate another exemplary antenna assembly **800** having a tapered lop antenna element **804** and a rotatably convertible support, mount, or stand **888**. In this example, the tapered loop antenna element **804** may be covered by or disposed within a cover material (e.g., plastic, other dielectric material, etc.), which may be the same material from which the support **888** is made.

In this example embodiment of the antenna assembly **800**, the rotatably convertible support **888** allows the antenna assembly **800** to be supported on a horizontal surface from a vertical surface depending on whether the support **888** is in a first or second configuration. For example, FIG. **26** illustrates the support or stand **888** in a first configuration in which the support **888** allows the antenna assembly **800** to be supported on a horizontal surface after being placed upon that horizontal surface. The horizontal surface upon which the antenna assembly **800** may be placed may comprise virtually any horizontal surface, such as the top of a desk, table top, television, etc. In some embodiments, the antenna assembly **800** may be fixedly attached or fastened to the horizontal surface by using mechanical fasteners (e.g., wood screws, etc.) inserted through fastener holes **899** (FIG. **36**) on the bottom of the support **888**. But the antenna assembly **800** may be attached to a horizontal surface using other methods, such as double-side adhesive tape, etc. Or, the antenna assembly **800** need not be attached to the horizontal surface at all.

FIG. **27** illustrates the support **888** in a second configuration that allows the antenna assembly **800** to be mounted to a vertical surface, such as wall, etc. In some embodiments, the antenna assembly **800** may be suspended from a nail or screw on a wall by way of the opening **898** (FIG. **40**) on the bottom of the support **888**.

By way of example, a user may rotate the support **888** to convert the support **888** from the first configuration (FIG. **26**) to the second configuration (FIG. **27**), or vice versa. As shown in FIGS. **28** and **29**, the rotatably convertible support **888** includes a threaded stem portion **889** and a threaded opening **894**. In this example, the threaded stem portion **889** extends upwardly from the base of the support **888**, and the threaded opening **894** is defined by the upper portion of the support **888**. In other embodiments, this may be reversed such that the base includes threaded opening, and the threaded stem portion extends downwardly from the upper portion of the mount.

With continued reference to FIGS. **28** and **29**, the support **888** also includes stops for retaining the rotatably convertible support **888** in the first or second configuration. In this example embodiment as shown in FIG. **28**, the support **888** include a first stop **890** (e.g., projection, nub, protrusion, protuberance, etc.) configured to be engagingly received within an opening **891**, for retaining the support **888** in the first configuration. FIGS. **30**, **31**, and **34** illustrate the engagement of the first stop **890** within the opening **891**, which inhibits relative rotation of the upper and lower portions of the support **888** thus helping retain support **888** in the first configuration for supporting the antenna assembly **800** on a horizontal surface. In this example, the first stop **890** is provided on the upper portion of the support **888** and the opening **891** is on the lower portion or base of the support **888**. In other embodiments, this may be reversed such that the base includes the first stop and the opening is on the upper portion of the support.

The support **888** also include a second stop **893** (FIG. **29**) (e.g., projection, nub, protrusion, protuberance, etc.) configured to be engagingly received within an opening **892** (FIG. **28**), for retaining the support **888** in the second configuration. The engagement of the second stop **893** within the opening **892** inhibits relative rotation of the upper and lower portions of the support **888** thus helping retain support **888** in the second configuration for supporting the antenna assembly **800** from a vertical surface. In this example, the second stop **893** is provided on the upper portion of the support **888** and the opening **892** is on the lower portion or base of the support **888**. In other embodiments, this may be reversed such that the base includes the second stop and the opening is on the upper portion of the support.

In addition helping retain the support **888** in either the first or second configuration, the stops may also help provide a tactile and/or audible indication to the user to stop rotating the upper or lower portion of the support **888** relative to the other portion. For example, as a user is reconfiguring or converting the support **888** from the first or second configuration to the other configuration, the user may feel and/or hear an audible click as the corresponding first or second stop **890**, **893** is engaged into the corresponding opening **891**, **892**.

As shown in FIGS. **29** and **33**, the antenna assembly **800** includes a connector **897** for connecting a coaxial cable to the antenna assembly **800**. Alternative embodiments may include different types of connectors.

The antenna assemblies **300** (FIGS. **14** and **15**), **400** (FIG. **16**), and **800** (FIGS. **26** through **42**) do not include any reflector. In some embodiments, the antenna assemblies **300**, **400**, **800** are configured to provide good VSWR (voltage standing wave ratio) without a reflector. In other embodiments, however, the antenna assemblies **300**, **400**, **800** may include a reflector, such as reflector identical or similar to a reflector disclosed herein (e.g., **108** (FIG. **1**), **208** (FIG. **13**), **508** (FIG. **17**), **608** (FIG. **19**), **708** (FIG. **21**), **908** (FIG. **43**), **1008** (FIG. **48**) or other suitably configured reflector.

The antenna assemblies **300**, **400**, **800** may be operable and configured similar to the antenna assemblies **100** and **200** in at least some embodiments thereof. The illustrated circular shapes of the supports **388**, **488**, **888** are only exemplary embodiments. The support **388**, **488**, **888** may have many shapes (e.g. square, hexagonal, etc.). Removing a reflector may result in an antenna with less gain but wider bi-directional pattern, which may be advantageous for some situations where the signal strength level is high and from various directions.

Other exemplary embodiments of antenna assemblies for mounting outdoors are illustrated in FIGS. **17** through **19**. FIGS. **17** and **18** show an antenna assembly **500** having a tapered loop antenna element **504**, a printed circuit board balun **512**, and a support **588**, where the antenna assembly **500** is mounted outdoors to a vertical mast or pole **592**. FIG. **19** shows an antenna assembly **600** having two tapered loop antenna elements **604**A and **604**B and a support **688**, where the antenna assembly **600** is mounted outdoors to a vertical mast or pole **692**. In various embodiments, the supports **588** and/or **688** may be nonconvertible or rotatably convertible in a manner substantially similar to the support **888**.

The antenna assemblies **500** and **600** include reflectors **508** and **608**. Unlike the generally solid planar surface of reflectors **108** and **208**, the reflectors **508** and **608** have a grill or mesh surface **560** and **660**. The reflector **508** also includes two perimeter flanges **564**. The reflector **608** includes two

perimeter flanges **664**. A mesh reflector is generally preferred for outdoor applications to reduce wind loading. With outdoor uses, size is generally less important such that the mesh reflector may be made somewhat larger than the equivalent indoor models to compensate for the inefficiency of the mesh. The increased size of the mesh reflector also removes or reduces the need for a baffle, which is generally more important on indoor models that tend to be at about the limit of the size versus performance curves.

Any of the various embodiments disclosed herein (e.g., FIGS. **14** through **19**, FIGS. **26** through **42**, FIGS. **43** through **47**, FIGS. **48** through **50**, FIGS. **58** through **66**, FIG. **67**, etc.) may include one or more components (e.g., balun, reflector, etc.) similar to components of antenna assembly **100**. In addition, any of the various disclosed herein may be operable and configured similar to the antenna assembly **100** in at least some embodiments thereof.

According to some embodiments, an antenna element for signals in the very high frequency (VHF) range (e.g., 170 Megahertz to 216 Megahertz, etc.) may be less circular in shape but still based on an underlying electrical geometry of antenna elements disclosed herein. A VHF antenna element, for example, may be configured to provide electrical paths of more than one length along an inner and outer periphery of the antenna element. The proper combination of such an element with an electrically small reflector may thus result in superior balance of directivity, efficiency, bandwidth, and physical size as what may be achieved in other example antenna assemblies disclosed herein.

For example, FIGS. **21** through **24** illustrate an exemplary embodiment of an antenna assembly **700**, which may be used for reception of VHF signals (e.g., signals within a frequency bandwidth of 170 Megahertz to 216 Megahertz, etc.). As shown, the antenna assembly **700** includes an antenna element **704** and a reflector **708**.

The antenna element **704** has an outer periphery or perimeter portion **740** and an inner periphery or perimeter portion **744**. The outer periphery or perimeter portion **740** is generally rectangular. The inner periphery or perimeter portion **744** is also generally rectangular. In addition, the antenna element **704** also includes a tuning bar **793** disposed or extending generally between the two side members **794** of the antenna element **704**. The tuning bar **793** is generally parallel with the top member **795** and bottom members **796** of the antenna element **704**. The tuning bar **793** extends across the antenna element **704**, such that the antenna element **704** includes a lower generally rectangular opening **748** and an upper generally rectangular opening **749**. The antenna element **704** further includes spaced-apart end portions **728**.

With the tuning bar **793**, the antenna element **704** includes first and second electrical paths of different lengths, where the shorter electrical path includes the tuning bar **793** and the longer electrical path does not. The longer electrical path is defined by an outer loop of the antenna element **704**, which includes the antenna element's spaced-apart end portions **728**, bottom members **796**, side members **794**, and top member **795**. The shorter electrical path is defined by an inner loop of the antenna element **704**, which includes the antenna element's spaced-apart end portions **728**, bottom members **796**, portions of the side members **794** (the portions between the tuning bar **793** and bottom members **796**), and the tuning bar **793**. By a complex coupling theory, the electrical paths defined by the inner and outer loops of the antenna element **704** allow for efficient operation within the VHF bandwidth range of about 170 Megahertz to about 216 Megahertz in some embodiments. With the greater efficiency, the size of the antenna assembly may thus be reduced (e.g., 75% size reduction, etc.) and still provide satisfactory operating characteristics.

The tuning bar **793** may be configured (e.g., sized, shaped, located, etc.) so as to provide impedance matching for the antenna element **704**. In some example embodiments, the tuning bar **793** may provide the antenna element **704** with a more closely matched impedance to a 300 ohm transformer.

In one particular example, the end portions **728** of the antenna element **704** are spaced apart a distance of about 2.5 millimeters. By way of further example, the antenna element **704** may be configured to have a width (from left to right in FIG. **22**) of about 600 millimeters, a height (from top to bottom in FIG. **22**) of about 400 millimeters, and have the tuning bar **793** spaced above the bottom members **796** by a distance of about 278 millimeters. A wide range of materials may be used for the antenna element **704**. In one exemplary embodiment, the antenna element **704** is made from aluminum hollow tubing with a ¾ inch by ¾ inch square cross section. In this particular example, the various portions (**728**, **793**, **794**, **795**, **796**) of the antenna element **704** are all formed from the same aluminum tubing, although this is not required for all embodiments. Alternative embodiments may include an antenna element configured differently, such as from different materials (e.g., other materials besides aluminum, antenna elements with portions formed from different materials, etc.), non-rectangular shapes and/or different dimensions (e.g., end portions spaced apart greater than or less than 2.5 millimeters, etc.). For example, some embodiments include an antenna element with end portions spaced apart a distance of between about 2 millimeters to about 5 millimeters. The spaced-apart end portions may define an open slot therebetween that is operable to provide a gap feed for use with a balanced transmission line.

With continued reference to FIGS. **21** through **24**, the reflector **708** includes a grill or mesh surface **760**. The reflector **708** also includes two perimeter flanges **764**. The perimeter flanges **764** may extend outwardly from the mesh surface **760**. In addition, members **797** may be disposed behind the mesh surface **760**, to provide reinforcement to the mesh surface **760** and/or a means for supporting or coupling the mesh surface **760** to a supporting structure. By way of example only, the reflector **708** may be configured to have a width (from left to right in FIG. **22**) of about 642 millimeters, a height (from top to bottom in FIG. **22**) of about 505 millimeters, and be spaced apart from the antenna element **704** with a distance of about 200 millimeters separating the reflector's mesh surface **760** from the back surface of the antenna element **704**. Also, by way of example only, the perimeter flanges **764** may be about 23 millimeters long and extend outwardly at an angle of about 120 degrees from the mesh surface **760**. A wide range of material may be used for the reflector **708**. In one exemplary embodiment, the reflector **708** includes vinyl coated steel. Alternative embodiments may include a differently configured reflector (e.g., different material, shape, size, location, etc.), no reflector, or a reflector positioned closer or farther away from the antenna element.

FIG. **25** is an exemplary line graph showing computer-simulated directivity and VSWR (voltage standing wave ratio) versus frequency (in megahertz) for the antenna assembly **700** according to an exemplary embodiment.

FIGS. **43** and **44** illustrate an exemplary embodiment of an antenna assembly **900** embodying one or more aspects of the present disclosure. As shown, the antenna assembly **900** includes a tapered loop antenna element **904** and a rotatably convertible support, mount, or stand **988**.

The support **988** is rotatably convertible between a first configuration (shown in FIGS. **43** and **44**) for supporting the antenna assembly **900** on a horizontal surface and a second configuration for supporting the antenna assembly **900** from a vertical surface. In some embodiments, the antenna assembly **900** may be attached, fastened, or coupled to a surface by using mechanical fasteners (e.g., screws, etc.) inserted within fastener holes **998** and **999** on the bottom (FIG. **47**) of the support **988**. The antenna assembly **900** may be attached to a surface using other methods, such as double-sided adhesive tape, etc. Or, the antenna assembly **900** need not be attached to the horizontal surface at all.

The support **988** may be similar in structure and operation as the support **888** of antenna assembly **800** described above. For example, the support **988** includes a threaded stem portion **989** (FIG. **45**) extending upwardly from the base of the support **988**. The support **988** also includes a threaded opening defined by the upper portion of the support **988**. In other embodiments, this may be reversed such that the base includes threaded opening, and the threaded stem portion extends downwardly from the upper portion of the mount.

The support **988** includes stops for retaining the rotatably convertible support **988** in the first or second configuration as described above for support **888**. In this example embodiment, the support **988** include a first stop (e.g., projection, nub, protrusion, protuberance, etc.) configured to be engagingly received within an opening **991** (FIG. **45**) for retaining the support **988** in the first configuration (FIG. **44**). The support **988** includes a second stop **993** (FIG. **44**) (e.g., projection, nub, protrusion, protuberance, etc.) configured to be engagingly received within an opening for retaining the support **988** in the second configuration. In addition to helping retain the support **988** in either the first or second configuration, the stops may also help provide a tactile and/or audible indication to the user to stop rotating the upper or lower portion of the support **988** relative to the other portion.

The support **988** further includes a connector **997** for connecting a coaxial cable (e.g., a 75-ohm RG6 coaxial cable fitted with an F-Type connector, etc.) to the antenna assembly **900**. Alternative embodiments may include different types of connectors.

In this exemplary embodiment, the rotatably convertible support **988** also includes a slot or groove **909** as shown in FIG. **46**. The slot or groove **909** is configured for receiving a lower portion of a reflector **908** therein for mounting the reflector **908** to the support **988** without requiring any mechanical fastener or other mounting means. As shown in FIGS. **43** and **44**, a reflector **908** may be mounted in the slot **909** when the support **988** is in the first configuration for supporting the antenna assembly **900** on a horizontal surface. When mounted in the slot **909**, the reflector **908** is spaced apart from the tapered loop antenna element **904** as shown in FIG. **44**.

The reflector **908** comprises a grill or mesh surface **960** having two perimeter flanges or sidewalls **964** extending outwardly (e.g., at oblique angles, etc.) from the mesh surface **960**. In use, the reflector **908** is operable for reflecting electromagnetic waves generally towards the tapered loop antenna element **904** and generally affecting impedance bandwidth and directionality. In alternative embodiments, reflectors having other configurations may be used, such as a reflector with a solid planar surface (e.g., reflector **108**, **208**, etc.). In other exemplary embodiments, the antenna assembly **900** may not include any reflector **908**.

With the exception of the reflector **908** and the base **988** having the slot **909**, the antenna assembly **900** may include one or more components similar to components described above for antenna assembly **800**. In addition, the antenna assembly **900** may be operable and configured similar to the antenna assembly **100** in at least some embodiments thereof.

In exemplary embodiments, the antenna assembly **900** may be configured to have, provide and/or operate with one or more of (but not necessarily any or all of) the following features. For example, the antenna assembly **900** may be configured to operate with a range of 30+ miles with a peak gain (UHF) of 8.25 dBi, and consistent gain throughout the entire UHF DTV channel spectrum. The antenna assembly **900** may provide great performance regardless of whether it is indoors, outdoors, or in an attic. The antenna assembly **900** may be dimensionally small with a length of 12 inches, width of 12 inches, and depth of 5 inches. The antenna assembly **900** may have an efficient, compact design that offers excellent gain and impedance matching across the entire post 2009 UHF DTV spectrum and with good directivity at all UHF DTV frequencies with a peak gain of 8.25 dBi.

FIGS. **48** and **49** illustrate an exemplary embodiment of an antenna assembly **1000** embodying one or more aspects of the present disclosure. As shown, the antenna assembly **1000** includes two tapered loop antenna elements **1004** (e.g., in a figure eight configuration, etc.) and a support **1088**.

In this exemplary embodiment, the two loops **1004** are arranged one opposite to the other such that a gap is maintained between each pair of opposite spaced apart end portions of each loop **1004**. The gap or open slot may be used to provide a gap feed for use with a balanced transmission line. In operation, this gap feed configuration allows the vertical going electrical current components to effectively cancel each other out such that antenna assembly **1000** has relatively pure H polarization at the passband frequencies and exhibits very low levels of cross polarized signals.

The antenna assembly **1000** also includes a reflector **1008** having a grill or mesh surface **1060**. Two perimeter flanges or sidewalls **1064** extend outwardly (e.g., at an oblique angle, etc.) from the mesh surface **1060**. In use, the reflector **1008** is operable for reflecting electromagnetic waves generally towards the tapered loop antenna element **1004** and generally affecting impedance bandwidth and directionality. In alternative embodiments, reflectors having other configurations may be used, such as a reflector with a solid planar surface (e.g., reflector **108**, **208**, etc.). In still other exemplary embodiments, the antenna assembly **1000** may not include any reflector **1008**.

In this exemplary embodiment, the antenna assembly **1000** also includes a dipole **1006**. The dipole **1006** may be fed from the center and include two conductors or dipole antenna elements **1007** (e.g., rods, etc.). The dipole antenna elements **1007** extend outwardly relative to the tapered loop antenna elements **1004**. In this illustrated embodiment, the dipole antenna elements **1007** extend laterally outward from respective left and right sides of the antenna assembly **1000**. The dipole **1006** is configured so as to allow the antenna assembly **1000** to operate across a VHF frequency range from about 174 megahertz to about 216 megahertz. The double tapered loop antenna elements **1004** allows the antenna assembly **1000** to also operate across a UHF frequency range from about 470 megahertz to about 806. Accordingly, the antenna assembly **1000** is specifically configured for reception (e.g., tuned and/or targeted, etc.) across the UHF/VHF DTV channel spectrum of frequencies. With the exception of the dipole **1006**, the antenna assembly **1000** may include one or more components similar to components described above for double tapered loop

antenna assembly **600**. In addition, the antenna assembly **1000** may include an impedance 75 Ohm output F connection.

In exemplary embodiments, the antenna assembly **1000** may be configured to have, provide and/or operate with one or more of (but not necessarily any or all of) the following features. For example, the antenna assembly **1000** may be configured to operate within both a VHF frequency range from 174 MHz to 216 MHz (Channels 7-13) and a UHF 470 MHz to 806 MHz (Channels 14-69). The antenna assembly **1000** may have a range of 50+ miles with a generous beam width of 70 degrees, a peak gain (UHF) of 10.4 dBi at 670 MHz, a peak gain (VHF) of 3.1 dBi at 216 MHz, VSWR 3.0 max for UHF and VHF, and consistent gain throughout the entire UHF/VHF DTV channel spectrum. The antenna assembly **1000** may provide great performance regardless of whether it is indoors, outdoors, or in an attic. The antenna assembly **1000** may be dimensionally small with a length of 20 inches, width of 35.5 inches, and depth of 6.5 inches. The antenna assembly **1000** may be configured to have improved performance for weak VHF stations and be operable as a broadband antenna without performance compromises.

In an exemplary embodiment, the antenna assembly **1000** includes an integrated diplexer that allows the specially tuned HDTV elements to be combined without performance degradation. The diplex in this example comprises an integrated UHF balun diplexer internal to the UHF antenna, e.g., within the support **1088**. Traditional multiband antennas are inherently compromised in that up to 90% of the television signal can be lost through impedance mismatches and phase cancellation when signals from their disparate elements are combined. After recognizing this failing of traditional multiband antennas, the inventors hereof developed and included a unique network feed in their antenna assembly **1000**, which network feed is able to combine the UHF and VHF signals without the losses mentioned above. For example, the antenna assembly **1000** may deliver 98% of signal reception to a digital tuner rather than being lost through impedance mismatches and phase cancellation.

In FIG. **50**, the antenna assembly **1000** is shown mounted to a mast or mounting pole **1092** for free-standing indoor use according to an exemplary embodiment. By way of example, the mounting pole **1092** may be generally J-shaped and have a length of about 20 inches. The mounting pole **1092** is shown secured to a mounting bracket via bolts. In alternative embodiments, the antenna assembly **1000** may be mounted differently indoors, outdoors, in an attic, etc.

FIGS. **51** through **57** illustrate performance technical data for the antenna assembly **1000** shown in FIG. **48**. The computer-simulated performance data was obtained using a state-of-the-art simulator with the following assumptions of a perfect electrical conductor (PEC), free space, no balun included, and 300 ohm line transmission line reference. The data and results shown in FIGS. **51** through **57** are provided only for purposes of illustration and not for purposes of limitation. Accordingly, an antenna assembly may be configured to have operational parameters substantially as shown in any one or more of FIGS. **51** through **57**, or it may be configured to have different operational parameters depending, for example, on the particular application and signals to be received by the antenna assembly.

As shown by the test data, the antenna assembly **1000** had a peak gain (UHF) of 10.4 dBi at 670 MHz, a peak gain (VHF) of 3.1 dBi at 216 MHz, and a maximum VSWR of 3.0 for both UHF and VHF. Notably, the antenna assembly had consistent gain throughout the entire UHF/VHF DTV channel spectrum.

FIGS. **58** through **66** illustrate an exemplary embodiment of an antenna assembly **1100** embodying one or more aspects of the present disclosure. As shown, the antenna assembly **1100** includes a single tapered loop antenna element **1104** that is coupled and/or supported to a support or housing **1113**. The antenna assembly **1100** may also include a balun (e.g., PCB balun **112** (FIG. **3**), etc.) within the housing **1113**, such that the balun is not visible and is obscured by the housing **1113**. The tapered loop antenna element **1104** and balun may be similar in structure and operation as the tapered loop antenna element **104** and balun **112** shown in FIGS. **1** and **3-10** and described above.

As shown in FIG. **66**, the antenna assembly **1100** is configured to adhere or mount (e.g., adhered, adhesively attached, etc.) to a window. Advantageously, mounting an antenna assembly to a window may provide a higher and more consistent DTV signal strength as compared to interior locations of a home. An antenna assembly may be mounted on various window types, such as a single or double pane window that is partially frosted and does not include a low e-coating, etc.

By way of example, the back or rear surface(s) of the tapered loop antenna element **1104** and/or the housing **1113** may be flat and planar as shown in FIGS. **60-63** and **65**. This, in turn, allows the flat back surface to be positioned flush against a window. Accordingly, the antenna assembly **1100** does not include or necessarily need a support or mount having a base or stand (e.g., **388**, **488**, **588**, **688**, **888**, **988**, etc.) for supporting or mounting the antenna assembly to a horizontal surface (e.g., FIGS. **14** and **15**, etc.), to a vertical surface (e.g., FIG. **16**), or to a reflector and mounting post (e.g., **508**, **592** in FIG. **17**; **608**, **692** in FIG. **18**; **1008**, **1092** in FIG. **50**, etc.). In this illustrated embodiment, the antenna assembly **1100** is shown without any reflector (e.g., **108**, **208**, **508**, **608**, **708**, **908**, **1008**, etc.). In other exemplary embodiments, the antenna assembly **1100** may include a reflector and/or support having a base or stand.

A wide range of materials may be used for the antenna assembly **1100**. In an exemplary embodiment, an outer surface or covering of the antenna assembly **1100** comprises silicone such that at least a portion of the back surface(s) of the antenna assembly **1100** is naturally tacky or self-adherent material. With the naturally tacky or self-adherent properties, the antenna assembly **1100** may be mounted or attached directly to a window without any additional adhesives, etc. needed between the window and the naturally tacky or self-adherent outer covering or surface of the antenna assembly **1100**. The tapered loop antenna element **1104** may comprise an electrically-conductive material (e.g., aluminum or copper foil, anodized aluminum, copper, stainless steel, other metals, other metal alloys, etc.) that is covered by or disposed within a cover material (e.g., silicone, plastic, self-adherent or naturally tacky material, other dielectric material, etc.), which may be the same material or a different material from which the housing **1113** is made.

In some exemplary embodiments, the tapered loop antenna element **1104** has sufficient flexibility to be rolled up into a cylindrical or tubular shape and then placed into a tube, e.g., to reduce shipping costs and decrease shelf space requirements, etc. In an exemplary embodiment, the tapered loop antenna element **1104** is adhered to a sticky silicone mat or substrate, which, in turn, could adhere to glass. In some exemplary embodiments, extremely thin flexible antenna elements were made from thin electrically-conductive material (e.g., metals, silver, gold, aluminum, copper, etc.) sputtered on flexible polymer substrates (e.g., stretched polyester film, etc.). In other exemplary embodiments, thin

electrically-conductive (e.g., metals, silver, gold, aluminum, copper, etc.) elements were bonded to silicone. In still further exemplary embodiments, electrically-conductive ink (e.g., silver, etc.) may be applied via a screen printing process onto a polyester substrate.

Other methods and means may be used for attaching the antenna assembly **1100** to a window. In other exemplary embodiments, hook and loop fasteners (e.g., hook and loop fasteners, etc.) and/or suction cups may be used for attaching or mounting the antenna assembly **1100** to a window.

In some exemplary embodiments, the antenna assembly **1100** may include an amplifier such that the antenna assembly **1100** is amplified. In other exemplary embodiments, the antenna assembly **1100** may be passive and not include any amplifiers for amplification.

As shown in FIG. **64**, the tapered loop antenna element **1104** has a generally annular shape cooperatively defined by an outer periphery or perimeter portion **1140** and an inner periphery or perimeter portion **1144**. The outer periphery or perimeter portion **1140** is generally circular. The inner periphery or perimeter portion **1144** is also generally circular, such that the tapered loop antenna element **1104** has a generally circular opening or thru-hole **1148**. The opening **1148** does not include any material therein. The inner diameter is offset from the outer diameter such that the center of the circle defined generally by the inner perimeter portion **144** (the inner diameter's midpoint) is below (e.g., about twenty millimeters, etc.) the center of the circle defined generally by the outer perimeter portion **140** (the outer diameter's midpoint). The offsetting of the diameters thus provides a taper to the tapered loop antenna element **1104** such that it has at least one portion (a top portion **1126** shown in FIG. **64**) wider than another portion, e.g., the end portions covered by or disposed under the housing **1113**.

The tapered loop antenna element **1104** includes first and second halves or curved portions **1150**, **1152** that are generally symmetric such that the first half or curved portion **1150** is a mirror-image of the second half or curved portion **1152**. Each curved portion **1150**, **1152** extends generally between a corresponding end portion and then tapers or gradually increases in width until the middle or top portion **1126** of the tapered loop antenna element **1104**. The tapered loop antenna element **1104** may be positioned against a vertical window in an orientation such that the wider portion **1126** of the tapered loop antenna element **1104** is at the top and the narrower end portions are at the bottom, to produce or receive horizontal polarization. The vertical polarization can be received with 90 degree rotation about a center axis perpendicular to the plane of the loop of the antenna element **1104**.

The tapered loop antenna element **1104** may have the same, similar, or different dimensions than the dimensions disclosed above for the tapered loop antenna element **104**.

As disclosed above for the tapered loop antenna element **104**, the spaced-apart end portions of the tapered loop antenna element **1104** may define an open slot therebetween that is operable to provide a gap feed for use with a balanced transmission line. The end portions may include fastener holes in a pattern corresponding to fastener holes of the PCB balun of the antenna assembly **1100**. Accordingly, mechanical fasteners (e.g., screws, etc.) may be inserted through the fastener holes of the tapered loop antenna element **1104** and PCB balun after they are aligned, for attaching the PCB balun to the tapered loop antenna element **1104**. Alternative embodiments may include other attachment methods (e.g., soldering, etc.).

As shown in FIGS. **58**, **60**, and **64**, the antenna assembly **1100** includes a connector **1197** for connecting a coaxial cable (e.g., a 75-ohm RG6 coaxial cable fitted with an F-Type connector, etc.) to the antenna assembly **1100**. Alternative embodiments may include different types of connectors. In operation, the antenna assembly **1100** may be used for receiving digital television signals (of which high definition television (HDTV) signals are a subset) and communicating the received signals to an external device, such as a television. In the illustrated embodiment of FIG. **66**, a coaxial cable **1124** is used for transmitting signals received by the antenna assembly **100** to a television. Alternative embodiments may include other coaxial cables or other suitable communication links.

FIG. **67** illustrates another exemplary embodiment of an antenna assembly **1200** embodying one or more aspects of the present disclosure. As shown, the antenna assembly **1200** includes a single tapered loop antenna element **1204** that is coupled and/or supported to a support or housing **1213** (e.g., plastic cover, etc.). The antenna assembly **1200** may also include a balun (e.g., PCB balun **112** (FIG. **3**), etc.) within the housing **1213**, such that the balun is not visible and is obscured by the housing **1213**.

The antenna assembly **1200** may be similar in structure and operation as the antenna assembly **1100** shown in FIGS. **58-66** and described above. In this exemplary embodiment, the area **1215** defined by the tapered loop antenna element **1204** is not an opening or thru-hole **1148** as in the tapered loop antenna element **1104**. Instead, the area **1215** comprises a portion of substrate (e.g., silicone substrate, etc.) that is attached to the back surface of the antenna assembly **1200**. In an exemplary embodiment, the substrate comprises silicone. When the antenna assembly **1200** is shipped and/or prior to use, the silicone substrate is covered or provided with a relatively stiff layer of plastic to prevent or inhibit dust and debris from adhering to the silicone substrate, which is relatively sticky. When the antenna assembly **1200** is ready to be used and placed against a window, the plastic covering is removed from the silicone substrate. Then, the silicone substrate is placed against the window to adhere the antenna assembly **1200** to the window. In this example, the silicone substrate is preferably naturally tacky, self-adherent, and/or sufficiently sticky such that the antenna assembly **1200** may be adhered to the window or other glass surface solely by the silicone substrate without any adhesives or other attachment means.

As shown in FIG. **67**, a coaxial cable **1224** (e.g., a 75-ohm RG6 coaxial cable fitted with an F-Type connector, etc.) may be used for transmitting signals received by the antenna assembly **1200** to a television, etc. Alternative embodiments may include other coaxial cables or other suitable communication links.

In exemplary embodiments in which an antenna assembly (e.g., **1100**, **1200**, etc.) includes a substrate for adherence to a window or other glass surface, the substrate may comprise polyurethane rubber material that is relatively soft and sticky. In an exemplary embodiment, the substrate comprises an adhesive polyurethane soft rubber. The substrate may initially include top and bottom outermost, removable liners made of polyethylene terephthalate (PET) film. The top liner may be disposed directly on the adhesive polyurethane soft rubber in order to prevent dust and debris from adhering to the adhesive polyurethane soft rubber. The top liner may be removed when the antenna assembly is to be adhered to a window via the adhesive polyurethane soft rubber. The bottom liner may be removed to expose an acrylic adhesive for adhering the substrate to the back of the

antenna assembly. The substrate also includes a carrier (e.g., PET film, etc.) on the bottom of the adhesive polyurethane soft rubber. The acrylic adhesive may be coated on the opposing surfaces of the bottom liner and carrier, respectively. The substrate in this example may be transparent in color, have a total thickness of about 3 millimeters, and/or have a temperature range between 20 to 80 degrees Celsius.

Accordingly, embodiments of the present disclosure include antenna assemblies that may be scalable to any number of (one or more) antenna elements depending, for example, on the particular end-use, signals to be received or transmitted by the antenna assembly, and/or desired operating range for the antenna assembly. By way of example only, another exemplary embodiment of an antenna assembly includes four tapered loop antenna elements, which are collectively operable for improving the overall range of the antenna assembly.

Other embodiments relate to methods of making and/or using antenna assemblies. Various embodiments relate to methods of receiving digital television signals, such as high definition television signals within a frequency range of about 174 megahertz to about 216 megahertz and/or a frequency range of about 470 megahertz to about 690 megahertz. In one example embodiment, a method generally includes connecting at least one communication link from an antenna assembly to a television for communicating signals to the television that are received by the antenna assembly. In this method embodiment, the antenna assembly (e.g., **100**, **200**, **300**, **400**, **500**, **600**, **700**, **800**, **900**, **1000**, **1100**, **1200**, etc.) may include at least one antenna element (e.g., **104**, **204**, **304**, **504**, **604**, **704**, **804**, **904**, **1004**, **1104**, **1204**, etc.). The antenna assembly may include at least one reflector element (e.g., **108**, **208**, **508**, **608**, **708**, **908**, **1008**, etc.). In some embodiments, there may be a free-standing antenna element without any reflector element, where the free-standing antenna element may provide good impedance bandwidth, but low directivity for very compact solutions that work in high signal areas. In another example, a method may include rotating a portion of a support (e.g., support **888**, **988**, etc.) to a first or a second configuration, where the support in the first configuration allows an antenna assembly to be supported on a horizontal surface and the support in the second configuration allows the antenna assembly to be supported on a vertical surface.

The antenna assembly may be operable for receiving high definition television signals having a frequency range of about 470 megahertz and about 690 megahertz. The antenna element may have a generally annular shape with an opening (e.g., **148**, **1148**, etc.). The antenna element (along with reflector size, baffle, and spacing) may be tuned to at least one electrical resonant frequency for operating within a bandwidth ranging from about 470 megahertz to about 690 megahertz. The reflector element may be spaced-apart from the antenna element for reflecting electromagnetic waves generally towards the antenna element and generally affecting impedance bandwidth and directionality. The antenna element may include spaced-apart first and second end portions (e.g., **128**, etc.), a middle portion (e.g., **126**, etc.), first and second curved portions (e.g., **150**, **152**, etc.) extending from the respective first and second end portions to the middle portion such that the antenna element's annular shape and opening are generally circular. The first and second curved portions may gradually increase in width from the respective first and second end portions to the middle portion such that the middle portion is wider than the first and second end portions and such that an outer diameter of the antenna element is offset from a diameter of the generally circular opening. The first curved portion may be a mirror image of the second curved portion. A center of the generally circular opening may be offset from a center of the generally circular annular shape of the antenna element. The reflector element may include a baffle (e.g., **164**, etc.) for deflecting electromagnetic waves. The baffle may be located at least partially along at least one perimeter edge portion of the reflector element. The reflector element may include a substantially planar surface (e.g., **160**, etc.) that is substantially parallel with the antenna element, and at least one sidewall portion (e.g., **164**, etc.) extending outwardly relative to the substantially planar surface generally towards the tapered loop antenna element. In some embodiments, the reflector element includes sidewall portions along perimeter edge portions of the reflector element, which are substantially perpendicular to the substantially planar surface of the reflector element, whereby the sidewall portions are operable as a baffle for deflecting electromagnetic wave energy.

Embodiments of an antenna assembly disclosed herein may be configured to provide one or more of the following advantages. For example, embodiments disclosed herein may provide antenna assemblies that are physically and electrically small but still capable of operating and behaving similar to physically larger and electrically larger antenna assemblies. Exemplary embodiments disclosed may provide antenna assemblies that are relatively small and unobtrusive, which may be used indoors for receiving signals (e.g., signals associated with digital television (of which high definition television signals are a subset), etc.). By way of further example, exemplary embodiments disclosed herein may be specifically configured for reception (e.g., tuned and/or targeted, etc.) for use with the year 2009 digital television (DTV) spectrum of frequencies (e.g., HDTV signals within a first frequency range of about 174 megahertz and about 216 megahertz and signals within a second frequency range of about 470 megahertz and about 690 megahertz, etc.). Exemplary embodiments disclosed herein may thus be relatively highly efficient (e.g., about 90 percent, about 98 percent at 545 MHz, etc.) and have relatively good gain (e.g., about eight dBi maximum gain, excellent impedance curves, flat gain curves, relatively even gain across the 2009 DTV spectrum, relatively high gain with only about 25.4 centimeter by about 25.4 centimeter footprint, etc.). With such relatively good efficiency and gain, high quality television reception may be achieved without requiring or needing amplification of the signals received by some exemplary antenna embodiments. Additionally, or alternatively, exemplary embodiments may also be configured for receiving VHF and/or UHF signals.

Exemplary embodiments of antenna assemblies (e.g., **100**, **200**, **300**, **400**, **500**, **600**, **700**, **800**, **900**, **1000**, **1100**, **1200**, etc.) have been disclosed herein as being used for reception of digital television signals, such as HDTV signals. Alternative embodiments, however, may include antenna elements tuned for receiving non-television signals and/or signals having frequencies not associated with HDTV. Other embodiments may be used for receiving AM/FM radio signals, UHF signals, VHF signals, etc. Thus, embodiments of the present disclosure should not be limited to receiving only television signals having a frequency or within a frequency range associated with digital television or HDTV. Antenna assemblies disclosed herein may alternatively be used in conjunction with any of a wide range of electronic devices, such as radios, computers, etc. Therefore, the scope of the present disclosure should not be limited to use with only televisions and signals associated with television.

Numerical dimensions and specific materials disclosed herein are provided for illustrative purposes only. The particular dimensions and specific materials disclosed herein are not intended to limit the scope of the present disclosure, as other embodiments may be sized differently, shaped differently, and/or be formed from different materials and/or processes depending, for example, on the particular application and intended end use.

Certain terminology is used herein for purposes of reference only, and thus is not intended to be limiting. For example, terms such as "upper", "lower", "above", "below", "upward", "downward", "forward", and "rearward" refer to directions in the drawings to which reference is made. Terms such as "front", "back", "rear", "bottom" and "side", describe the orientation of portions of the component within a consistent, but arbitrary, frame of reference which is made clear by reference to the text and the associated drawings describing the component under discussion. Such terminology may include the words specifically mentioned above, derivatives thereof, and words of similar import. Similarly, the terms "first", "second" and other such numerical terms referring to structures do not imply a sequence or order unless clearly indicated by the context.

When introducing elements or features and the exemplary embodiments, the articles "a", "an", "the" and "said" are intended to mean that there are one or more of such elements or features. The terms "comprising", "including" and "having" are intended to be inclusive and mean that there may be additional elements or features other than those specifically noted. It is further to be understood that the method steps, processes, and operations described herein are not to be construed as necessarily requiring their performance in the particular order discussed or illustrated, unless specifically identified as an order of performance. It is also to be understood that additional or alternative steps may be employed.

Disclosure of values and ranges of values for specific parameters (such frequency ranges, etc.) are not exclusive of other values and ranges of values useful herein. It is envisioned that two or more specific exemplified values for a given parameter may define endpoints for a range of values that may be claimed for the parameter. For example, if Parameter X is exemplified herein to have value A and also exemplified to have value Z, it is envisioned that parameter X may have a range of values from about A to about Z. Similarly, it is envisioned that disclosure of two or more ranges of values for a parameter (whether such ranges are nested, overlapping or distinct) subsume all possible combination of ranges for the value that might be claimed using endpoints of the disclosed ranges. For example, if parameter X is exemplified herein to have values in the range of 1-10, or 2-9, or 3-8, it is also envisioned that Parameter X may have other ranges of values including 1-9, 1-8, 1-3, 1-2, 2-10, 2-8, 2-3, 3-10, and 3-9.

The description of the disclosure is merely exemplary in nature and, thus, variations that do not depart from the gist of the disclosure are intended to be within the scope of the disclosure. Such variations are not to be regarded as a departure from the spirit and scope of the disclosure.

What is claimed is:

1. A high definition television antenna assembly configured for receiving high definition television signals and communicating the received high definition television signals to a television, the antenna assembly comprising at least one antenna element including one or more fastener holes and a printed circuit board including one or more fastener holes, wherein the printed circuit board is attached to the at least one antenna element by one or more mechanical fasteners, wherein:

the at least one antenna element includes a first antenna element and a second antenna element;

each said first and second antenna element includes first and second portions that are generally symmetric such that the first portion is a mirror-image of the second portion;

the first and second antenna elements are in a mirror-image relationship and/or cooperatively define a generally figure eight configuration; and

the one or more fastener holes of the printed circuit board are aligned with corresponding ones of the one or more fastener holes of the first and/or second antenna elements, such that each said mechanical fastener is inserted through corresponding aligned fastener holes of printed circuit board and the first and/or second antenna elements.

2. The antenna assembly of claim **1**, wherein:

the printed circuit board includes a balun; and/or

the antenna assembly further comprises at least one reflector spaced-apart from the at least one antenna element and configured to be operable for reflecting electromagnetic waves generally towards the at least one antenna element.

3. The antenna assembly of claim **1**, wherein the first and second antenna elements include at least two spaced-apart portions each including at least one of the one or more fastener holes that are alignable with the one or more fastener holes of the printed circuit board, and wherein each said mechanical fastener is inserted through both a corresponding fastener hole of the first and second antenna elements and an aligned corresponding fastener hole of the printed circuit board.

4. The antenna assembly of claim **1**, wherein each of the first and second portions of the first and second antenna elements that are generally symmetric extends from a bottom of the corresponding one of the first and second antenna elements to a top of the corresponding one of the first or second antenna elements.

5. The antenna assembly of claim **1**, wherein the first antenna element is integral with the second antenna element such that the first and second antenna elements have a one-piece construction.

6. The antenna assembly of claim **1**, wherein each of the first and second antenna elements includes an opening, an inner periphery, and outer periphery that are rectangular.

7. The antenna assembly of claim **1**, wherein each of the first and second antenna elements includes a generally annular shape with an opening having a substantially closed shape.

8. The antenna assembly of claim **1**, wherein each said mechanical fastener is a single screw.

9. The antenna assembly of claim **1**, wherein the first and second antenna elements include first and second tapered loop antenna elements, respectively.

10. The antenna assembly of claim **1**, wherein the first and second antenna elements are rectangular.

11. The antenna assembly of claim **1**, wherein the first and second antenna elements are rectangular and cooperatively define the generally figure eight configuration.

12. The antenna assembly of claim **1**, wherein the first and second antenna elements are rectangular and in the mirror-image relationship.

13. The antenna assembly of claim 1, wherein the first and second antenna elements are rectangular, in the mirror-image relationship, and cooperatively define the generally figure eight configuration.

14. An antenna assembly comprising at least one antenna element configured to be operable for receiving high definition television signals, wherein:

the at least one antenna element includes first and second antenna elements in a mirror-image relationship and/or cooperatively defining a generally figure eight configuration;

each said first and second antenna element includes first and second portions that are generally symmetric such that the first portion is a mirror-image of the second portion, the first and second portions including one or more fastener holes;

the one or more fastener holes of the first antenna element are aligned with corresponding ones of the one or more fastener holes of the second antenna element, whereby the first and second antenna elements are attached by one or more mechanical fasteners inserted through corresponding aligned fastener holes of the first and second antenna elements.

15. The antenna assembly of claim 14, wherein the first and second antenna elements are rectangular.

16. The antenna assembly of claim 14, wherein the first and second antenna elements are rectangular and cooperatively define the generally figure eight configuration.

17. The antenna assembly of claim 14, wherein the first and second antenna elements are rectangular and in the mirror-image relationship.

18. The antenna assembly of claim 14, wherein the first and second antenna elements are rectangular, in the mirror-image relationship, and cooperatively define the generally figure eight configuration.

19. The antenna assembly of claim 14, wherein the first antenna element is integral with the second antenna element such that the first and second antenna elements have a one-piece construction.

20. The antenna assembly of claim 14, wherein each of the first and second portions of the at least one antenna element includes an opening, an inner periphery, and outer periphery that are circular, ovular, triangular, or rectangular.

21. The antenna assembly of claim 14, wherein each said mechanical fastener is a single screw.

22. An antenna assembly comprising at least one antenna element configured to be operable for receiving high definition television signals, wherein:

the at least one antenna element includes first and second antenna in a mirror- image relationship and/or cooperatively define a generally figure eight configuration;

each said first and second antenna element includes first and second portions that are generally symmetric such that the first portion is a mirror-image of the second portion; and

each said first and second antenna element includes one or more fastener holes, the one or more fastener holes of the first antenna element are aligned with corresponding ones of the one or more fastener holes of the second antenna element, whereby the first and second antenna elements are attached by one or more mechanical fasteners inserted through corresponding aligned fastener holes of the first and second antenna elements.

23. The antenna assembly of claim 22, wherein the first and second antenna elements are rectangular.

24. The antenna assembly of claim 22, wherein the first and second antenna elements are rectangular and cooperatively define the generally figure eight configuration.

25. The antenna assembly of claim 22, wherein the first and second antenna elements are rectangular and in the mirror-image relationship.

26. The antenna assembly of claim 22, wherein the first and second antenna elements are rectangular, in the mirror-image relationship, and cooperatively define the generally figure eight configuration.

27. The antenna assembly of claim 22, wherein a printed circuit board is coupled to the first and second antenna elements by the one or more mechanical fasteners, the printed circuit board including one or more openings aligned with corresponding ones of the one or more fastener holes of the first and/or second antenna elements to accommodate the one or more mechanical fasteners.

28. The antenna assembly of claim 22, wherein each of the first and second antenna elements includes an opening, an inner periphery, and outer periphery that are circular, ovular, triangular, or rectangular.

29. The antenna assembly of claim 22, wherein each said mechanical fastener is a single screw.

30. A high definition television antenna assembly configured for receiving high definition television signals and communicating the received high definition television signals to a television, the antenna assembly comprising at least one antenna element and a printed circuit board coupled to the at least one antenna element by one or more mechanical fasteners, wherein:

the at least one antenna element includes a first antenna element and a second antenna element;

each said first and second antenna element includes first and second portions that are generally symmetric such that the first portion is a mirror-image of the second portion;

the first and second antenna elements are in a mirror-image relationship and/or cooperatively define a generally figure eight configuration; and

each said first and second antenna element includes one or more fastener holes, the one or more fastener holes of the first antenna element are aligned with corresponding ones of the one or more fastener holes of the second antenna element, such that each said mechanical fastener is inserted through corresponding aligned fastener holes of the first and second antenna elements to thereby attach the first and second antenna elements and to couple the printed circuit board to the at least one antenna element.

31. The antenna assembly of claim 30, wherein the printed circuit board includes a balun electrically coupled to the first and second antenna elements by the one or more mechanical fasteners.

32. The antenna assembly of claim 30, wherein each said mechanical fastener is a single screw that electrically couples the printed circuit board to the first and second antenna elements.

33. The antenna assembly of claim 30, wherein the first and second antenna elements are rectangular, in the mirror-image relationship, and cooperatively define the generally figure eight configuration.

34. The antenna assembly of claim 30, wherein the printed circuit board including one or more openings aligned with corresponding ones of the one or more fastener holes of the

first and/or second antenna elements to accommodate the one or more mechanical fasteners.

* * * * *