US007990335B2

(12) **United States Patent**
Schneider et al.

(10) **Patent No.: US 7,990,335 B2**
(45) **Date of Patent: Aug. 2, 2011**

(54) **ANTENNA ASSEMBLIES WITH ANTENNA ELEMENTS AND REFLECTORS**

(75) Inventors: **Richard E. Schneider**, Wildwood, MO (US); **John Edwin Ross, III**, Moab, UT (US); **Corey Feit**, St. Louis, MO (US); **Dale Picolet**, House Springs, MO (US)

(73) Assignee: **Antennas Direct, Inc.**, Ellisville, MO (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **12/953,007**

(22) Filed: **Nov. 23, 2010**

(65) **Prior Publication Data**

US 2011/0102280 A1 May 5, 2011

Related U.S. Application Data

(63) Continuation-in-part of application No. 12/040,464, filed on Feb. 29, 2008, now Pat. No. 7,839,347, and a continuation of application No. 12/606,636, filed on Oct. 27, 2009, which is a continuation-in-part of application No. 12/050,133, filed on Mar. 17, 2008, now Pat. No. 7,609,222, which is a continuation-in-part of application No. 29/304,423, filed on Feb. 29, 2008, now Pat. No. Des. 598,433, which is a continuation-in-part of application No. 29/305,294, filed on Mar. 17, 2008, now Pat. No. Des. 604,276, which is a continuation-in-part of application No. 12/040,464, and a continuation of application No. 12/050,133, which is a continuation-in-part of application No. PCT/US2008/061908, filed on Apr. 29, 2008.

(60) Provisional application No. 60/992,331, filed on Dec. 5, 2007, provisional application No. 61/034,431, filed on Mar. 6, 2008.

(51) **Int. Cl.**
H01Q 3/00 (2006.01)

(52) **U.S. Cl.** **343/882**; 343/741; 343/878

(58) **Field of Classification Search** 343/741, 343/878, 880, 882
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,220,008 A * 10/1940 Woodward et al. 342/428
(Continued)

FOREIGN PATENT DOCUMENTS

CN ZL200820007283.2 5/2009
(Continued)

OTHER PUBLICATIONS

IEEE Spectrum: Antennas for the New Airwaves, http://www.spectrum.ieee.org/print/7328, Published Feb. 2009, 9 pages, Authors Richard Schneider and John Ross.

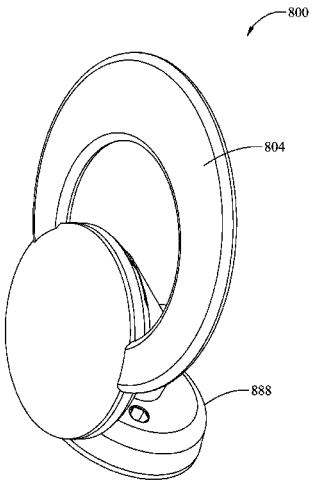
(Continued)

Primary Examiner — David G Phan
(74) *Attorney, Agent, or Firm* — Harness, Dickey & Pierce, P.L.C.

(57) **ABSTRACT**

According to various aspects, exemplary embodiments are provided of antenna assemblies. In an exemplary embodiment, an antenna assembly generally includes at least one tapered loop antenna element having a generally annular shape with an opening. An antenna assembly may also include a rotatably convertible support including a base and an upper portion coupled to a tapered loop antenna element in some embodiments. The upper portion is rotatable relative to the base between a first configuration for supporting the tapered loop antenna element on a horizontal surface and a second configuration for supporting the tapered loop antenna element from a vertical surface.

24 Claims, 38 Drawing Sheets



U.S. PATENT DOCUMENTS

2,437,251	A *	3/1948	Frische et al.	244/184
2,480,155	A	8/1949	Masters	
2,589,578	A *	3/1952	Sabins	343/869
D170,203	S	8/1953	Leonard	
D171,560	S	2/1954	Rutter	
D177,200	S	3/1956	Valiulis	
D179,111	S	11/1956	Ballan et al.	
3,015,101	A	12/1961	Turner et al.	
3,123,826	A	3/1964	Durham	
3,239,838	A	3/1966	Kelleher	
3,273,158	A	9/1966	Fouts et al.	
D209,402	S	11/1967	Burlingame	
D211,025	S	5/1968	Callaghan	
3,434,145	A	3/1969	Wells	
3,721,990	A	3/1973	Gibson et al.	
3,828,867	A *	8/1974	Elwood	175/45
4,184,163	A	1/1980	Woodward	
D318,673	S	7/1991	Terk	
D327,690	S	7/1992	Ogawa et al.	
5,280,645	A	1/1994	Nguyen et al.	
D344,731	S	3/1994	Witzky	
5,313,218	A	5/1994	Busking	
D414,495	S	9/1999	Heiligenstein et al.	
6,590,541	B1	7/2003	Schultze	
6,593,886	B2	7/2003	Schantz	
6,680,708	B2	1/2004	Yamaki	
6,885,352	B2	4/2005	Lee et al.	
7,091,925	B1	8/2006	Wang	
7,209,089	B2	4/2007	Schantz	
D544,471	S	6/2007	Wang	
7,239,290	B2	7/2007	Poilasne et al.	
D550,217	S	9/2007	Schneider	
D552,088	S	10/2007	Schneider	
D598,433	S	8/2009	Schneider et al.	
D598,434	S	8/2009	Schneider et al.	
7,609,222	B2	10/2009	Schneider et al.	
D604,276	S	11/2009	Schneider et al.	
7,693,570	B2 *	4/2010	Green et al.	600/415
7,839,347	B2	11/2010	Schneider et al.	
7,898,496	B2 *	3/2011	Olsen et al.	343/878
2002/0158798	A1	10/2002	Chiang et al.	
2003/0071757	A1	4/2003	Yamaki	
2004/0090379	A1	5/2004	Fourdeux et al.	
2004/0090385	A1	5/2004	Green	
2004/0113841	A1	6/2004	Louzir et al.	
2004/0217912	A1	11/2004	Mohammadian	
2005/0088342	A1	4/2005	Parsche	
2005/0162332	A1	7/2005	Schantz	
2005/0280582	A1	12/2005	Powell et al.	
2006/0033665	A1	2/2006	Yang	
2006/0055618	A1	3/2006	Poilasne et al.	
2006/0077115	A1	4/2006	Oh et al.	
2006/0103577	A1	5/2006	Lee	
2006/0164304	A1	7/2006	Huang et al.	
2007/0069955	A1	3/2007	McCorkle	
2007/0200769	A1	8/2007	Nakano et al.	
2008/0094291	A1	4/2008	Bystrom et al.	
2008/0211720	A1	9/2008	Hansen	
2008/0258980	A1	10/2008	Chen et al.	
2008/0291345	A1	11/2008	Schneider	
2009/0058732	A1	3/2009	Nakano et al.	
2009/0073067	A1	3/2009	Soler Castany et al.	
2009/0146899	A1	6/2009	Schneider et al.	
2009/0146900	A1	6/2009	Schneider et al.	
2010/0045551	A1	2/2010	Schneider et al.	

FOREIGN PATENT DOCUMENTS

CN	ZL200830119996.3	5/2009
CN	101453057	6/2009
CN	ZL200830119997.8	7/2009
CN	ZL200830009139.8	9/2009
EP	1555717	7/2005
EP	1653560	5/2006
EP	1753080	2/2007
EP	000946587-0001	5/2008
EP	000946587-0002	5/2008
EP	000946587-0003	5/2008
EP	000946587-0004	5/2008
EP	000946587-0005	5/2008
EP	000946587-0006	5/2008
EP	000946587-0007	5/2008
EP	08747115.7	6/2010
EP	10172435.9	8/2010
GB	2263360	7/1993
HK	1131703 A	1/2010
JP	1213590	6/2004
JP	1286151	9/2006
TW	D112283	8/2006
TW	D117777	6/2007
TW	D117778	6/2007
TW	D119092	9/2007
TW	200926506	6/2009
TW	D129744	7/2009
TW	D129745	7/2009
TW	D129746	7/2009
WO	WO2009/073249	6/2009

OTHER PUBLICATIONS

Antenna Engineering Handbook, 3rd Edition, Edited by Richard C. Johnson, McGraw Hill, 1993, pp. 5-13 to 5-16 (4 pages).

One-Element Loop Antenna with Finite Reflector, B. Rojarayanont and T. Sekiguchi, Electronics & Communications in Japan, vol. 59-B, No. 5, May 1976, p. 68 (1 page).

Frequency-and Time-Domain Modeling of Tapered Loop Antennas in Ultra-Wideband Radio Systems, Shiou-Li Chen and Shau-Gang Mao, Graduate Institute of Computer and Communication Engineer, pp. 179-182, IEEE copyright notice 2006 (4 pages).

Planar Miniature Tapered-Slot-Fed Annular Slot Antennas for Ultrawide-Band Radios, Tzyh-Ghuang Ma, Student Member, and Shyh-Kang, Jeng, Senior Member, IEEE, IEEE Transactions on Antennas and Propagation, vol. 53, No. 3, Mar. 2005, pp. 1194-1202 (9 pages).

Self-Mutual Admittances of Two Identical Circular Loop Antennas in a Conducting Medium and in Air, K. Lizuka, Senior Member, IEEE, R. W. P. King, Fellow, IEEE, and C. W. Harrison, Jr., Senior Member, IEEE, IEEE Transactions on Antennas and Propagation, vol. AP014, No. 4, Jul. 1966, pp. 440-450 (11 pages).

A Broadband Eccentric Annular Slot Antenna, Young Hoon Suh and Ikmo Park, Department of Electrical Engineering, Ajou University, pp. 94-97, IEEE copyright notice 2001 (4 pages).

A Printed Crescent Patch Antenna for Ultrawideband Applications, Ntsanderh C. Azenui an H.Y.D. Yang, IEEE Antennas and Wireless Propragation Letters, vol. 6, 2007, pp. 113-116 (4 pages).

Design of Compact Components for Ultra Wideband Communication Front Ends, Marek Bialkowski, Amin Abbosh, and Hing Kan, School of Information Technology and Electrical Engineering, The University of Queensland (4 pages).

Office Action issued by the United States Patent and Trademark Office dated Mar. 11, 2010, for U.S. Appl. No. 12/040,464 (18 pages).

Office Action issued by the United States Patent and Trademark Office dated Sep. 3, 2010, for U.S. Appl. No. 12/040,464 (6 pages).

International Search Report issued by the International Searching Authority dated Jul. 8, 2008, for International Patent Application No. PCT/US2008/061908 (1 page).

International Preliminary Report on Patentability and Written Opinion issued by the International Searching Authority dated Jul. 8, 2008, for International Patent Application No. PCT/US2008/061908 (9 pages).

European Supplementary Search Report and Opinion dated Oct. 7, 2010, issued by the European Patent Office for European Patent Application No. EP 08747115 (6 pages).

European Search Report dated Jan. 17, 2011, issued by the European Patent Office for European Patent Application No. EP 10193159.0 which is related to the instant application through a priority claim; (5 pages).

* cited by examiner

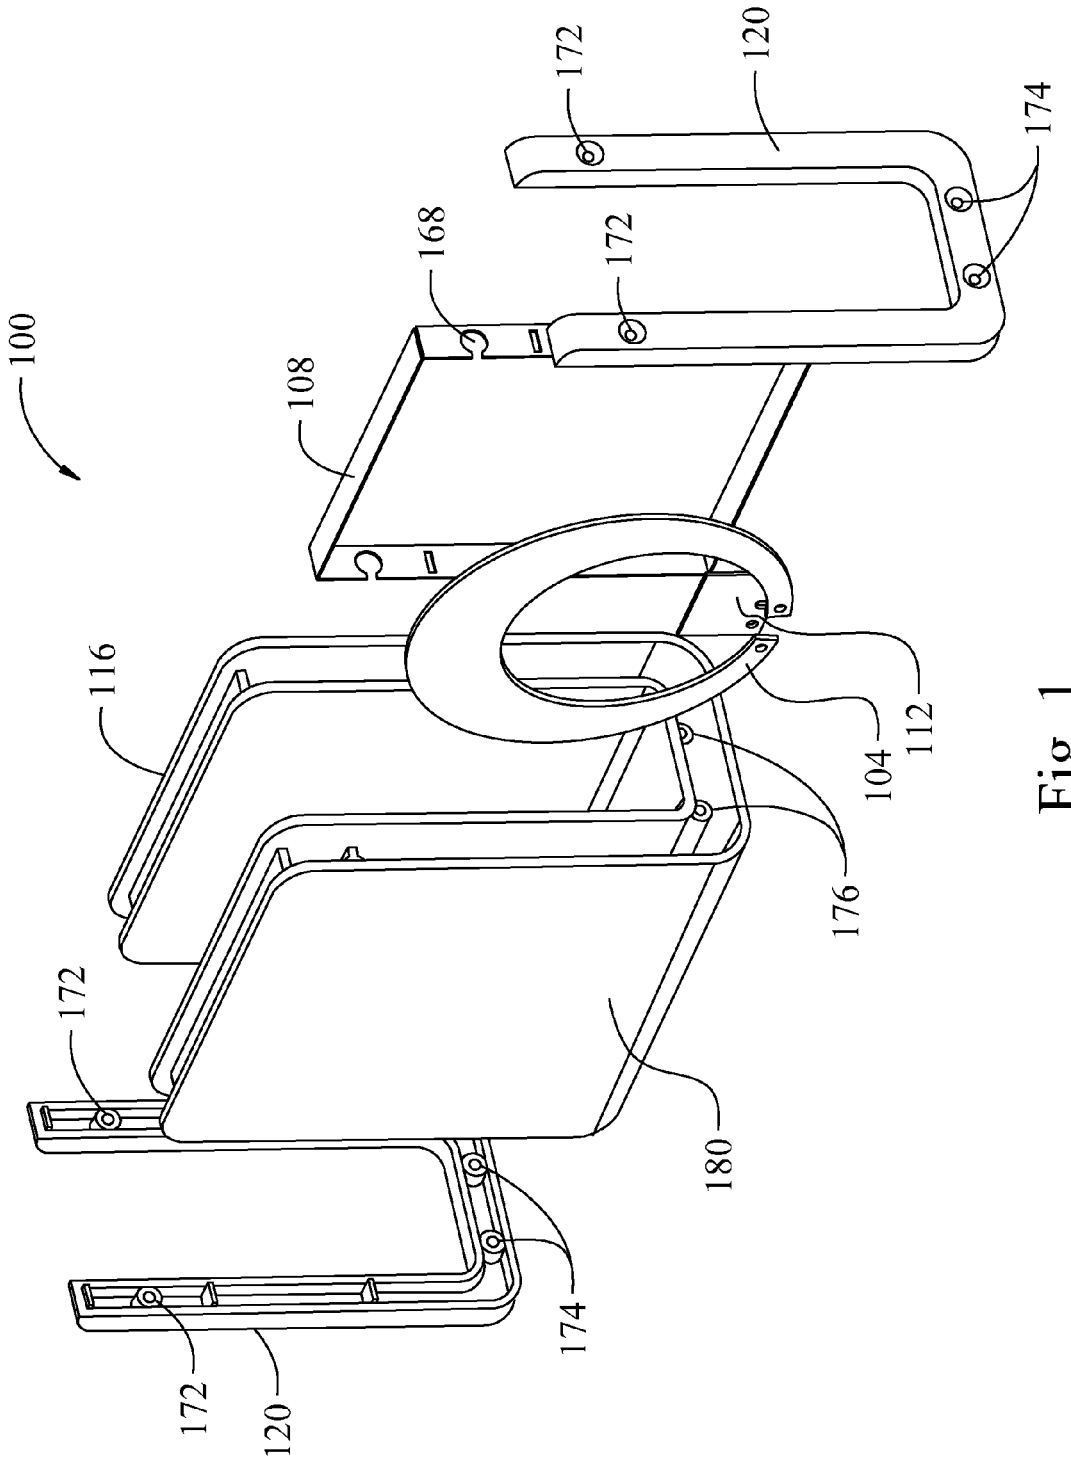


Fig. 1

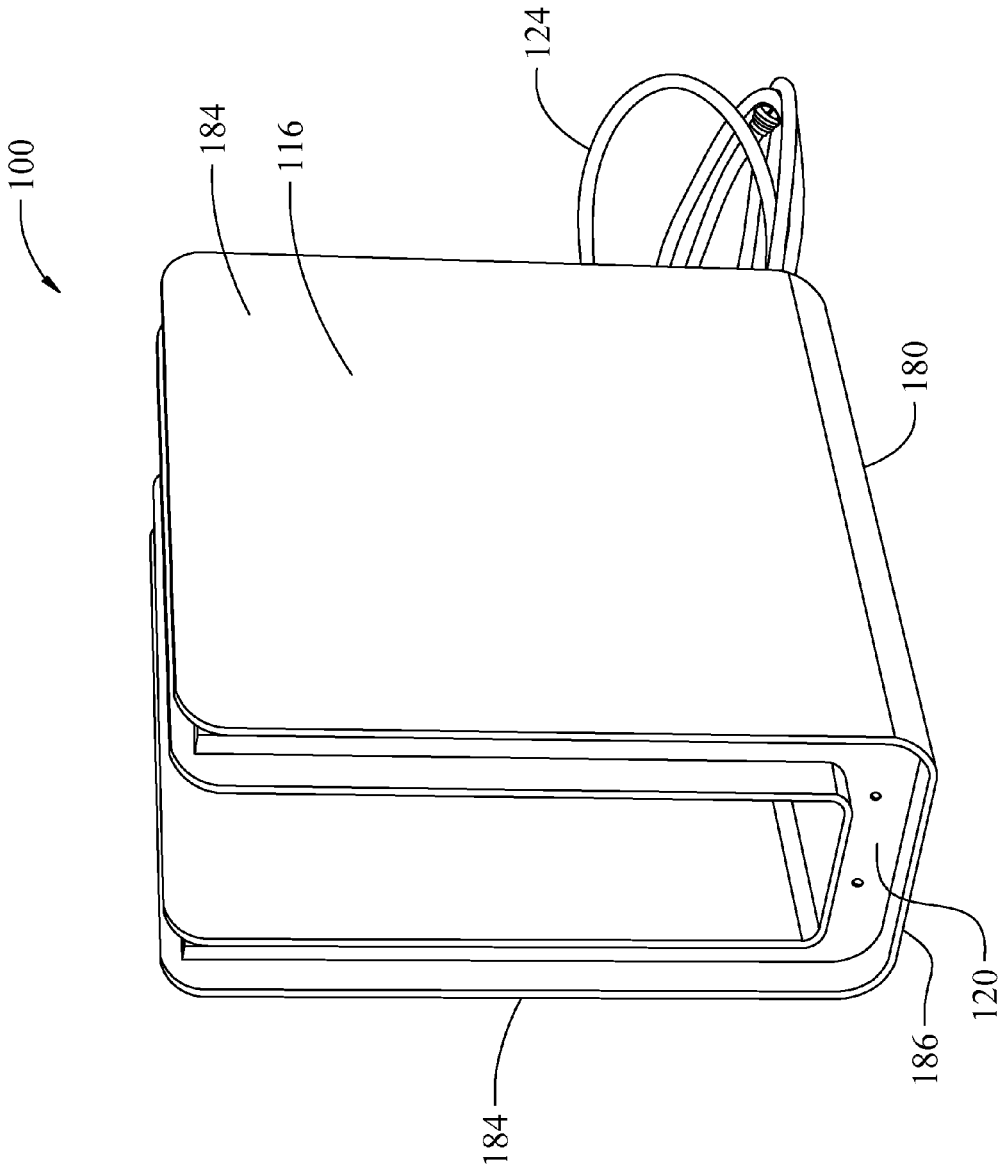


Fig. 2

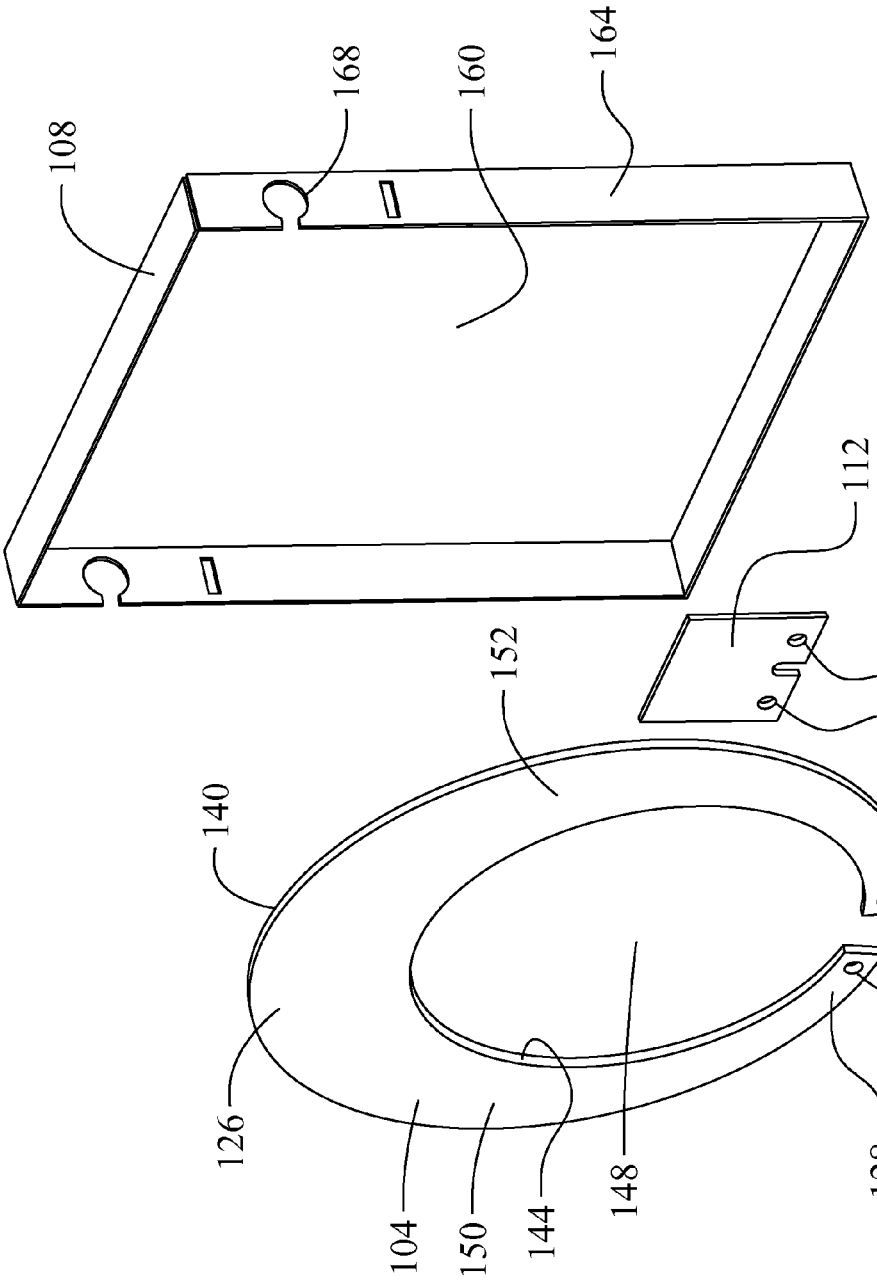


Fig. 3

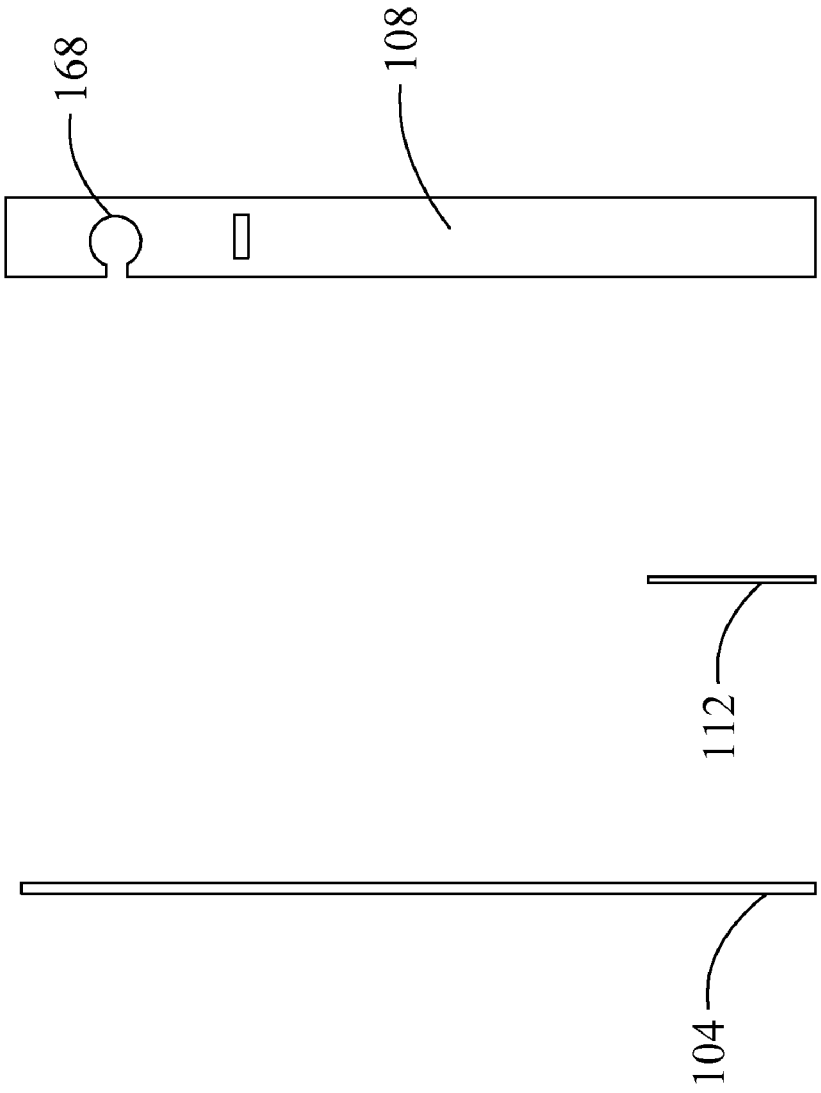


Fig. 4

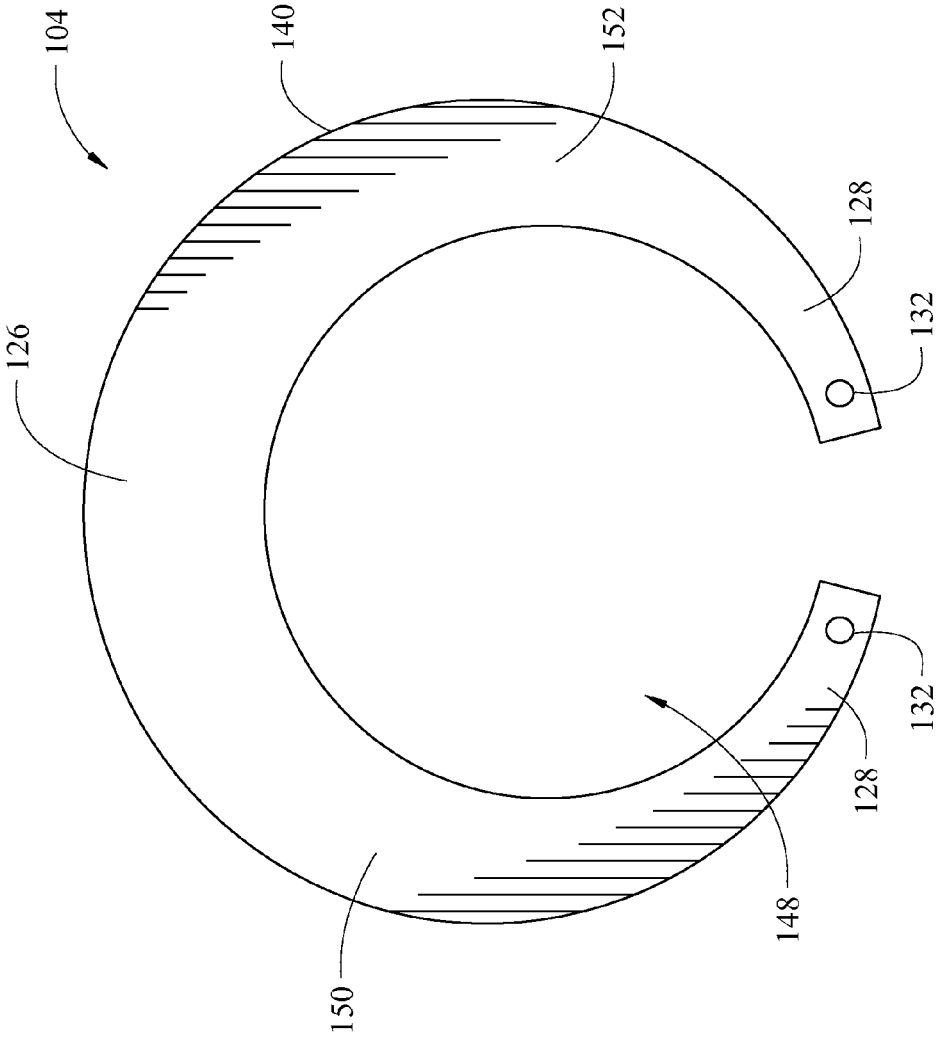


Fig. 5

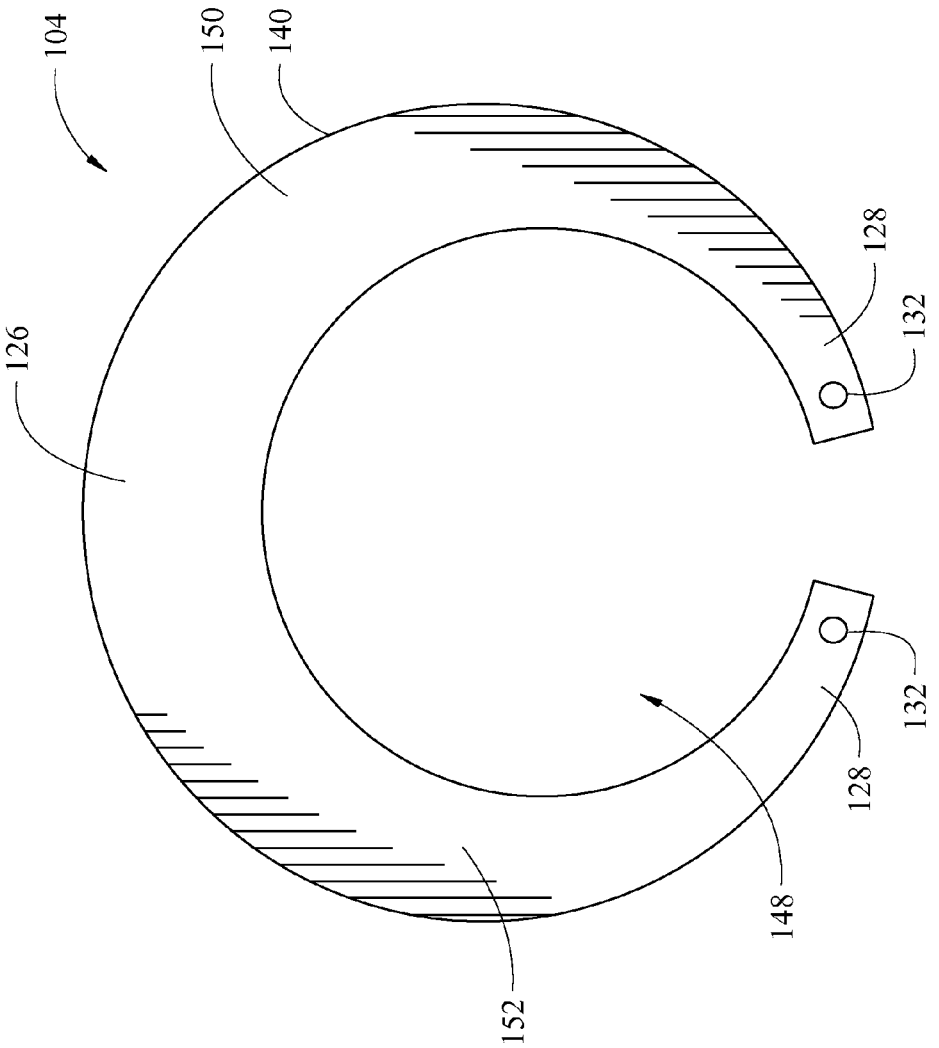


Fig. 6

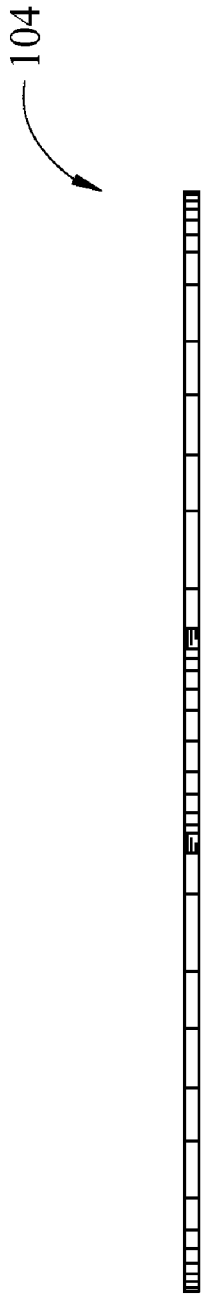


Fig. 7

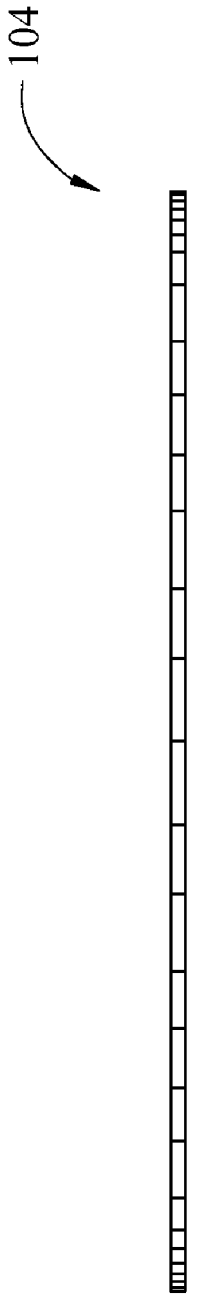


Fig. 8



Fig. 10



Fig. 9

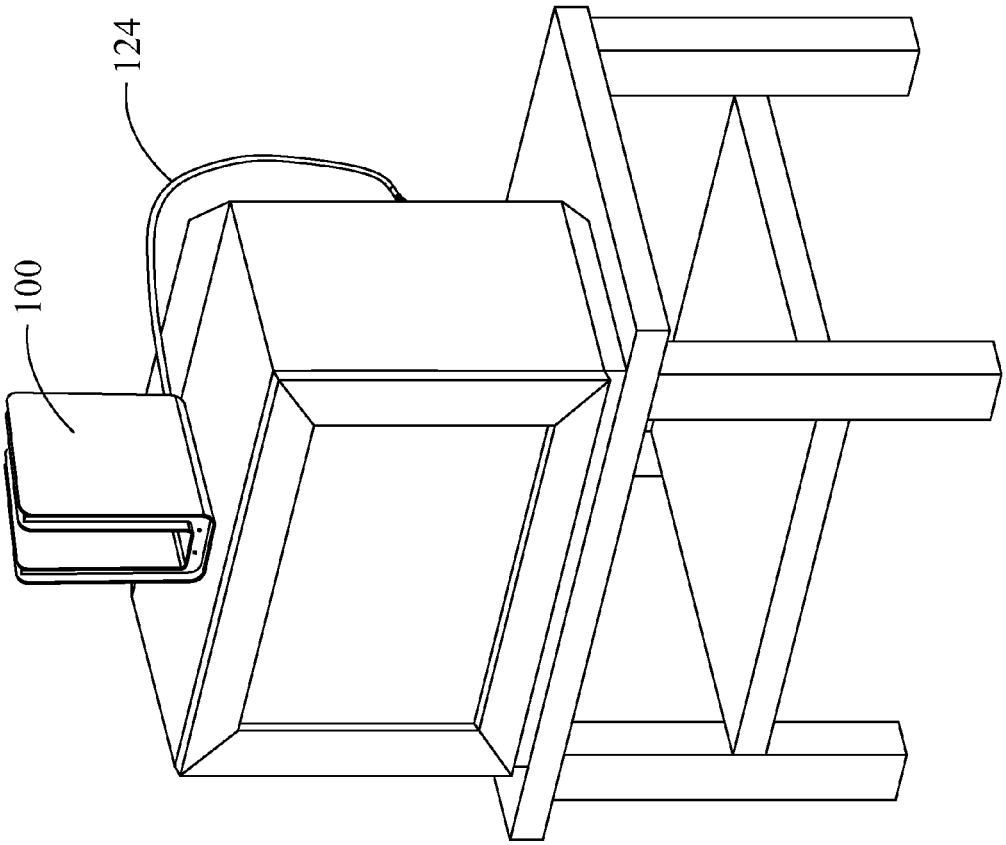


Fig. 11

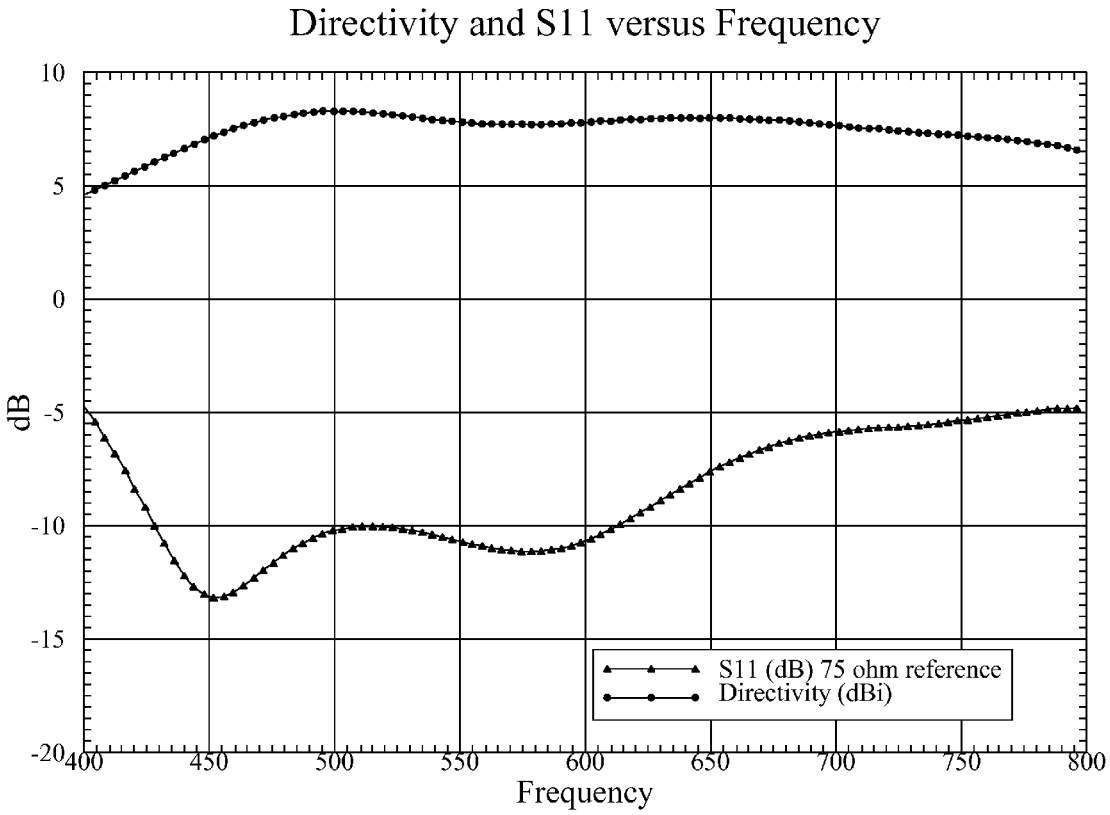

Directivity and S11 versus Frequency
10
5
0
-5
-10
-15
-20
dB
400
450
500
550
600
650
700
750
800
Frequency
S11 (dB) 75 ohm reference
Directivity (dBi)

Fig. 12

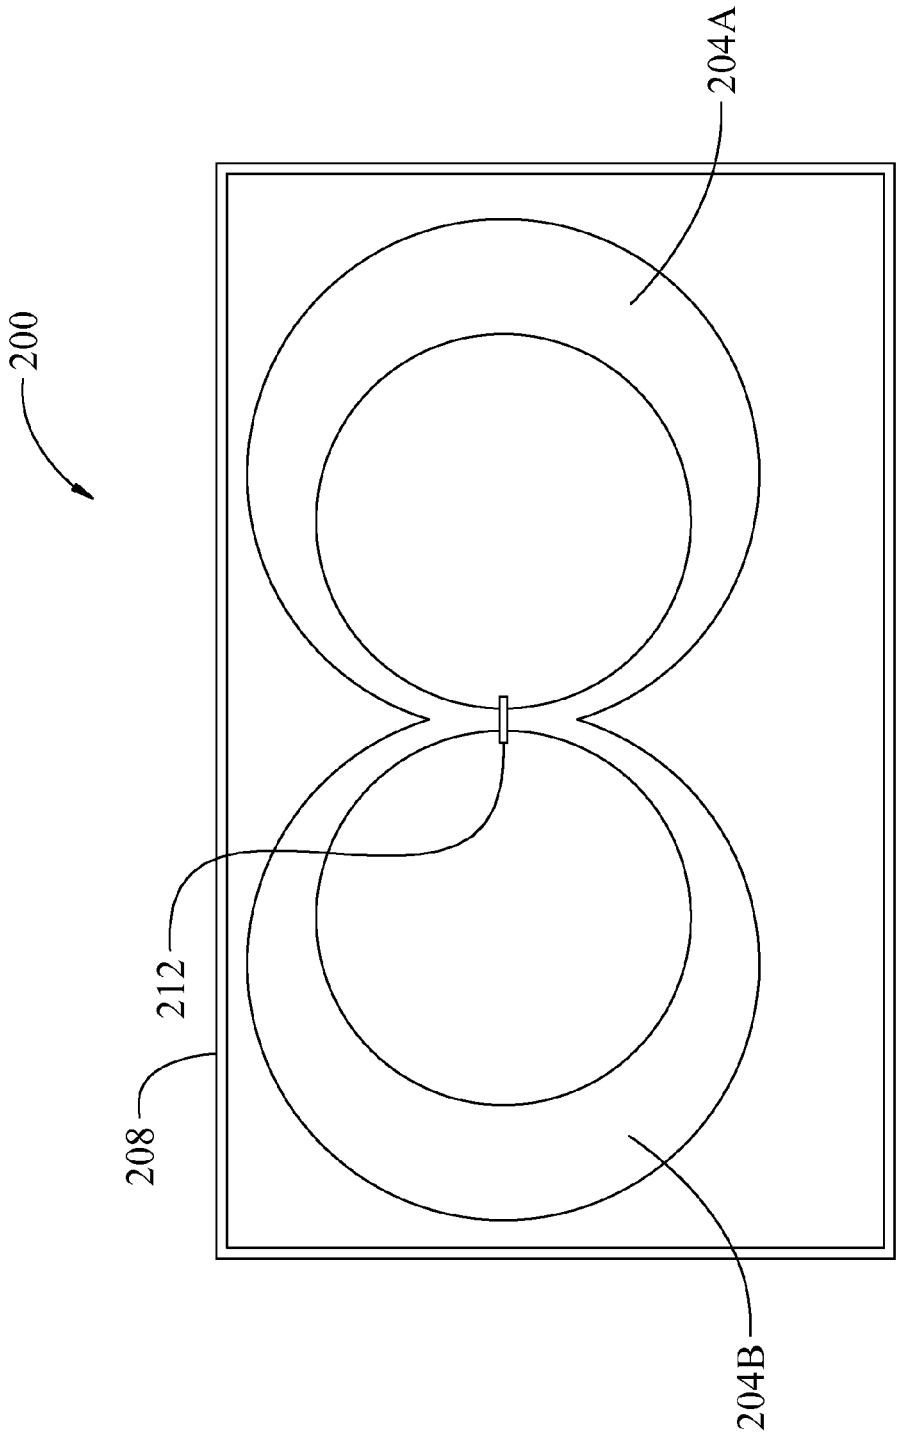


Fig. 13

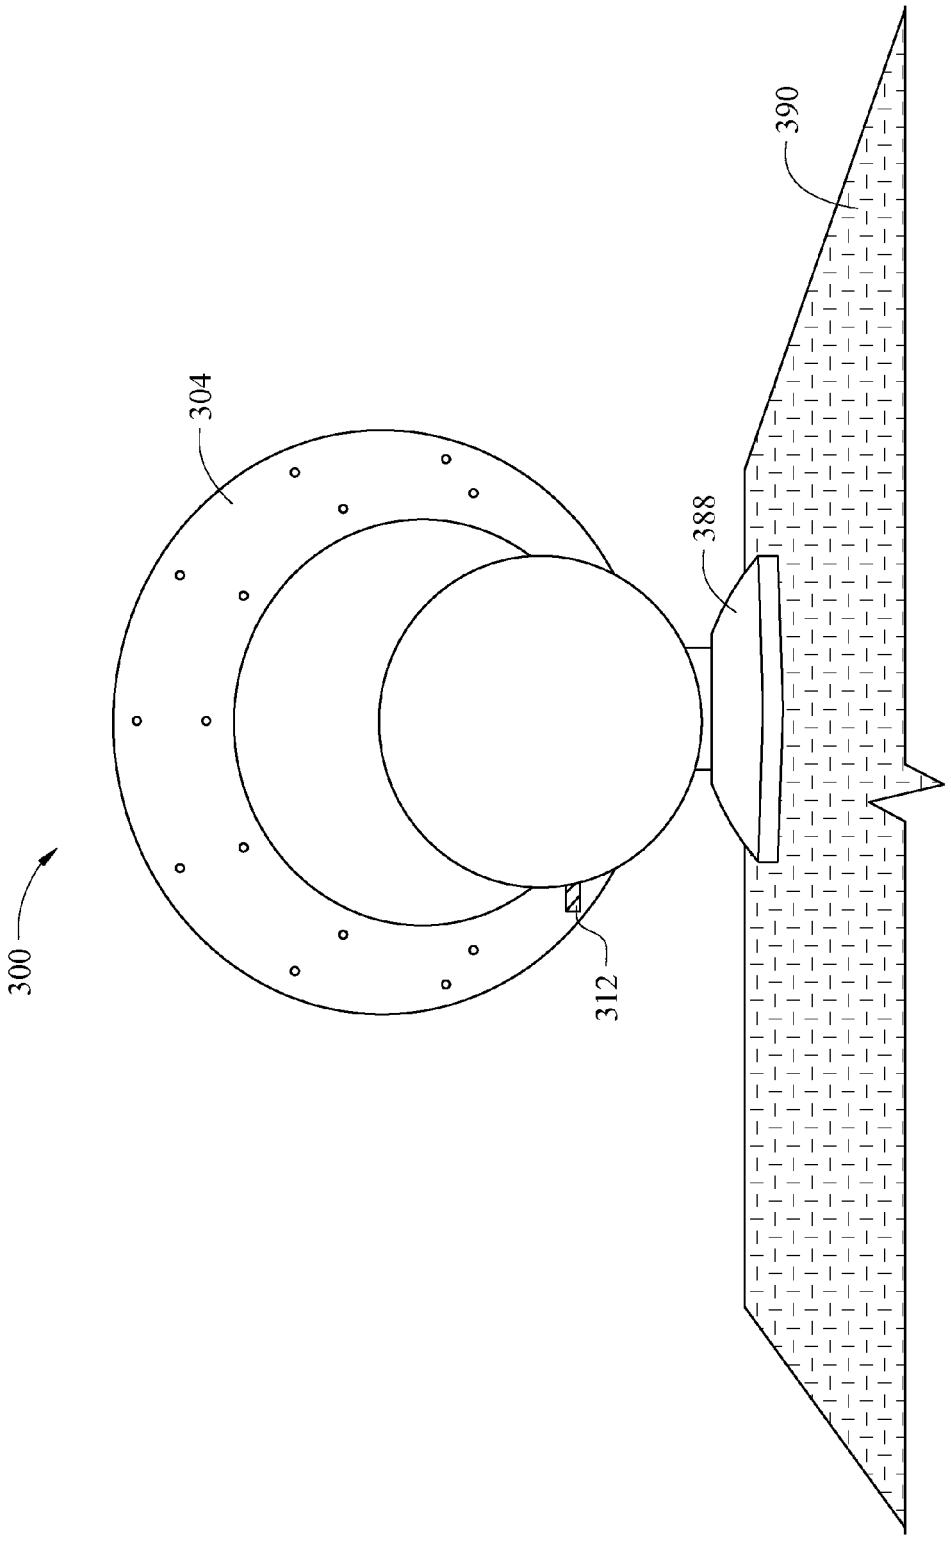


Fig. 14

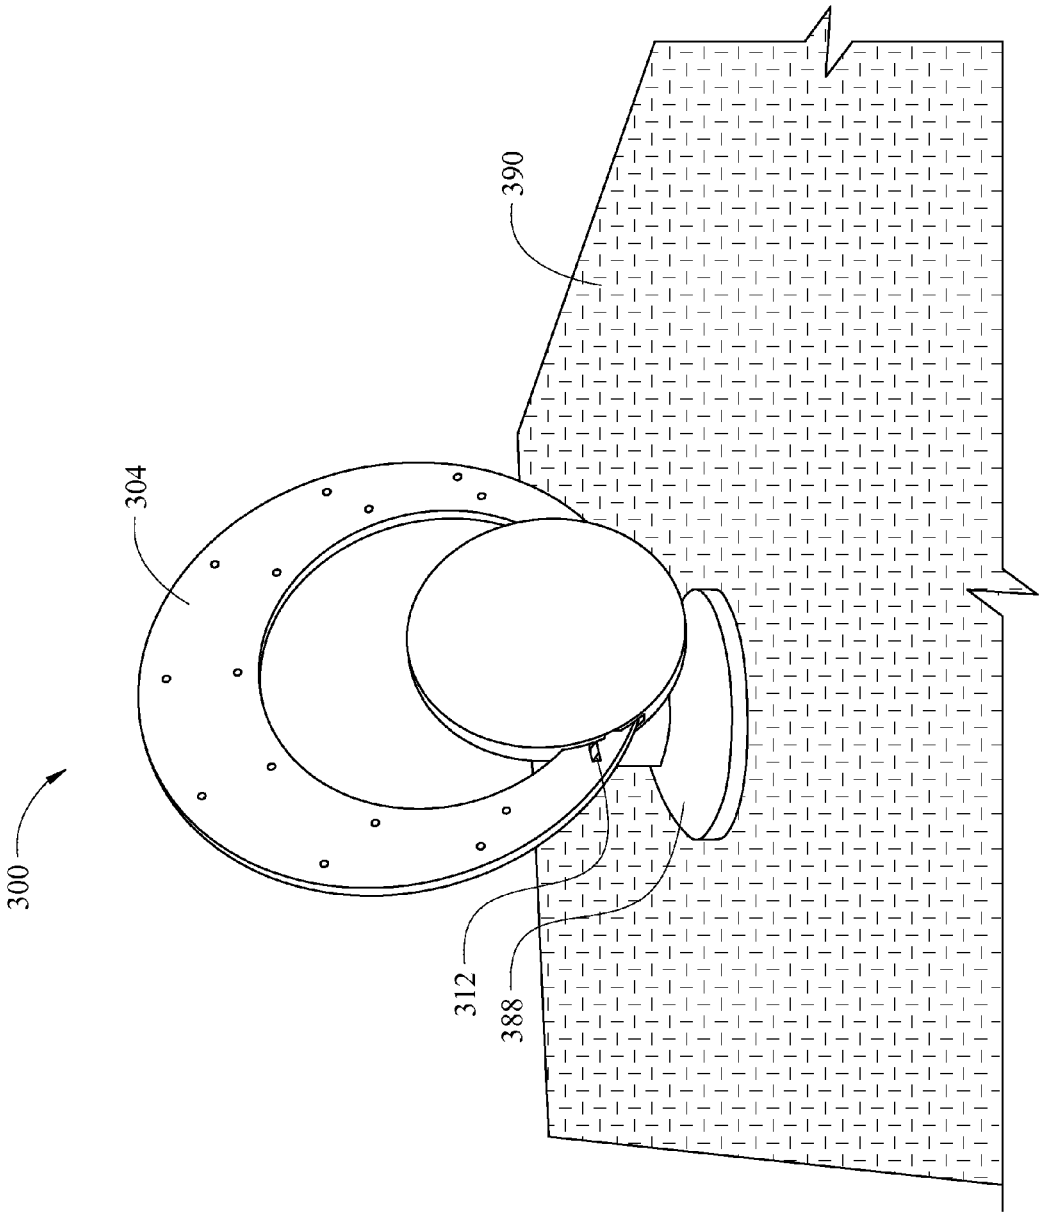


Fig. 15

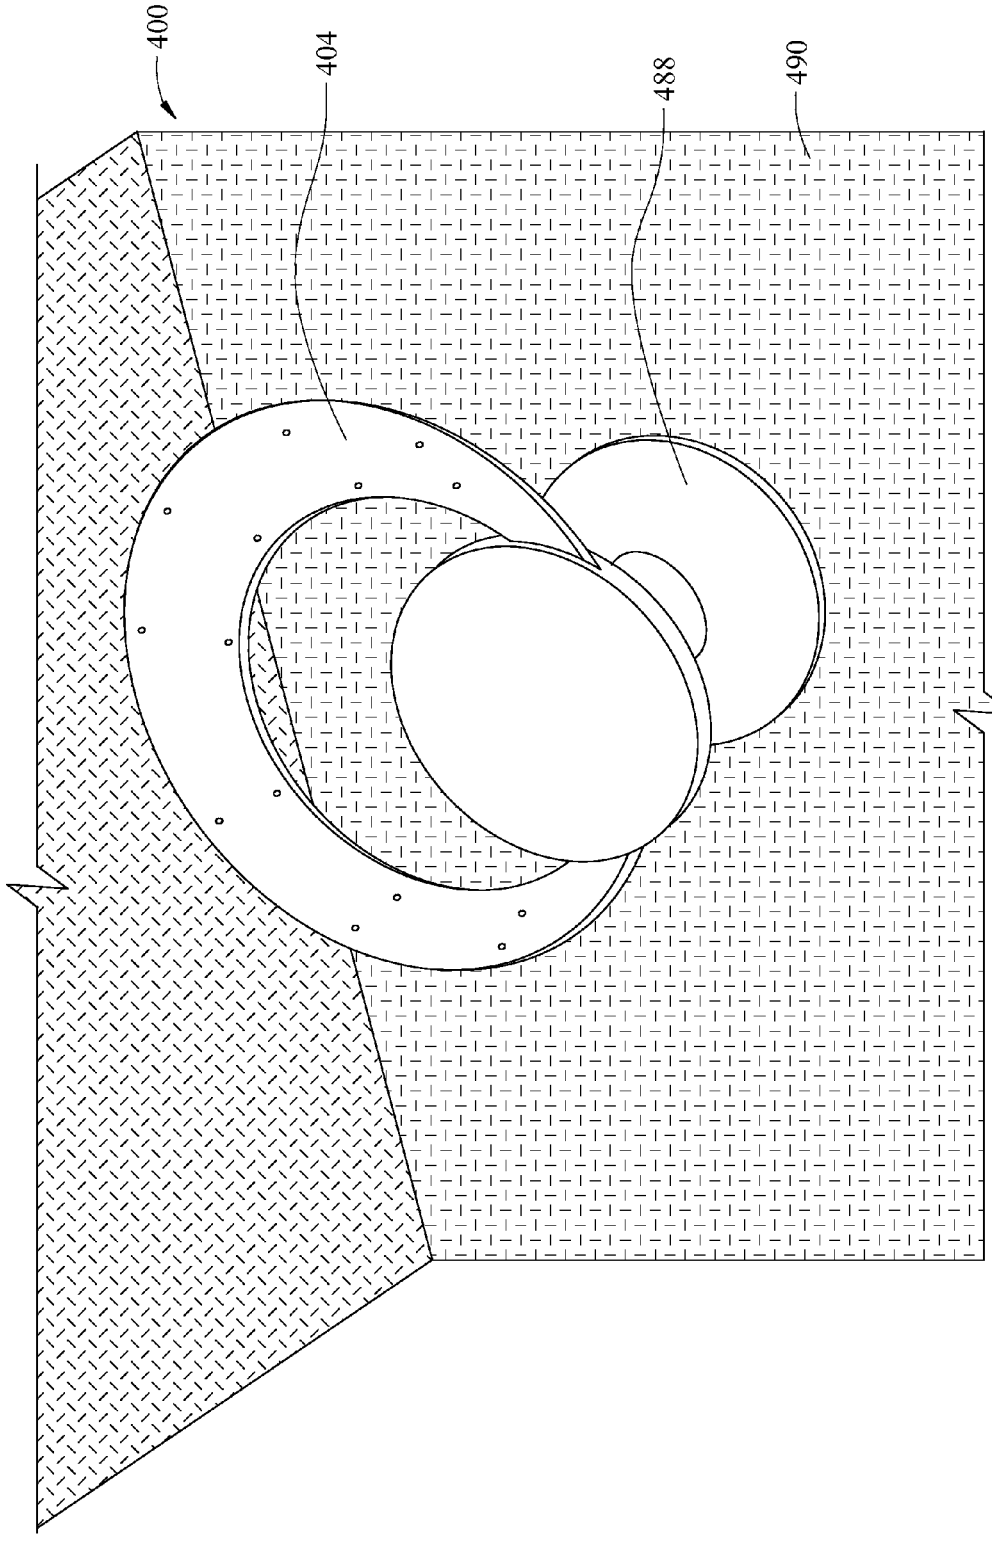


Fig. 16

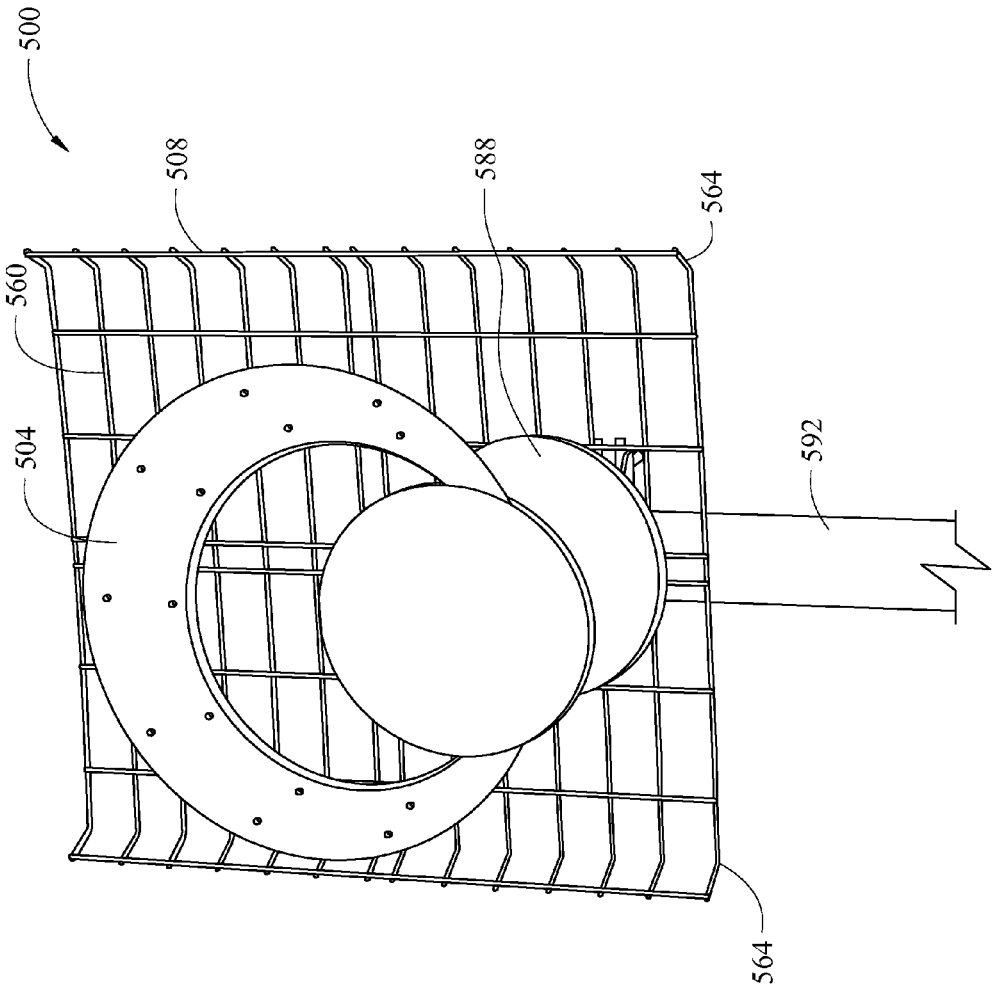


Fig. 17

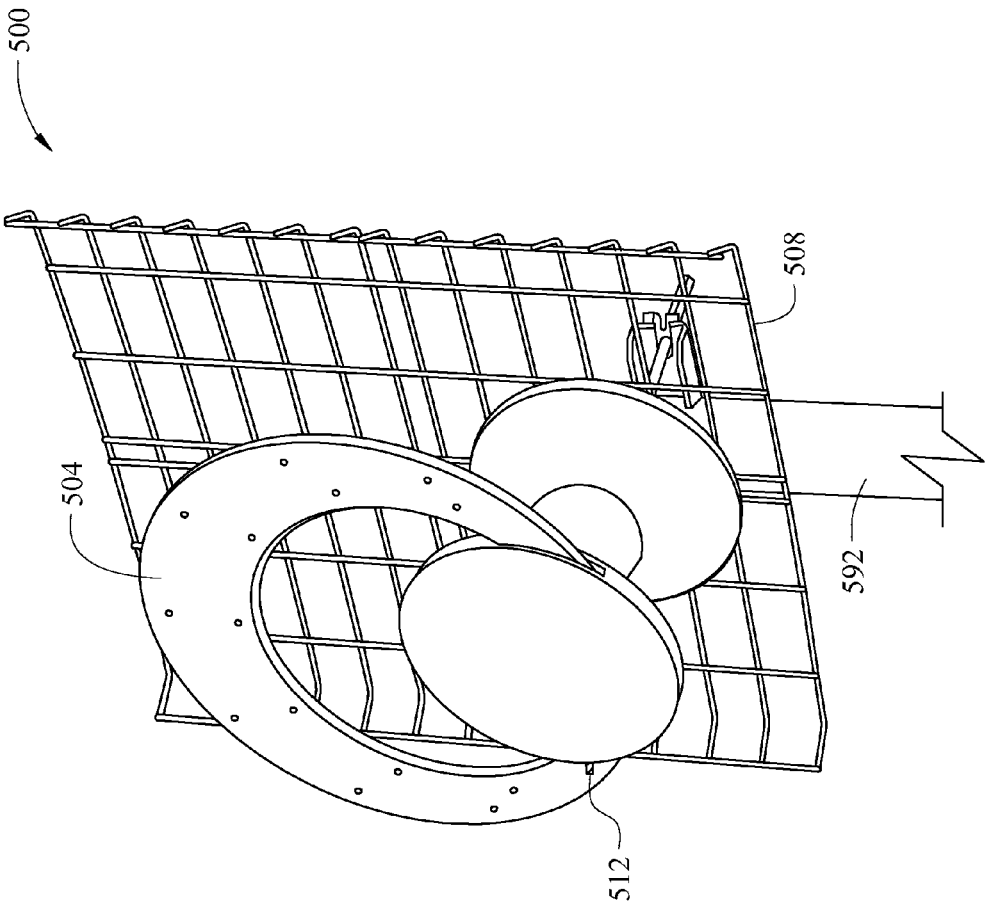


Fig. 18

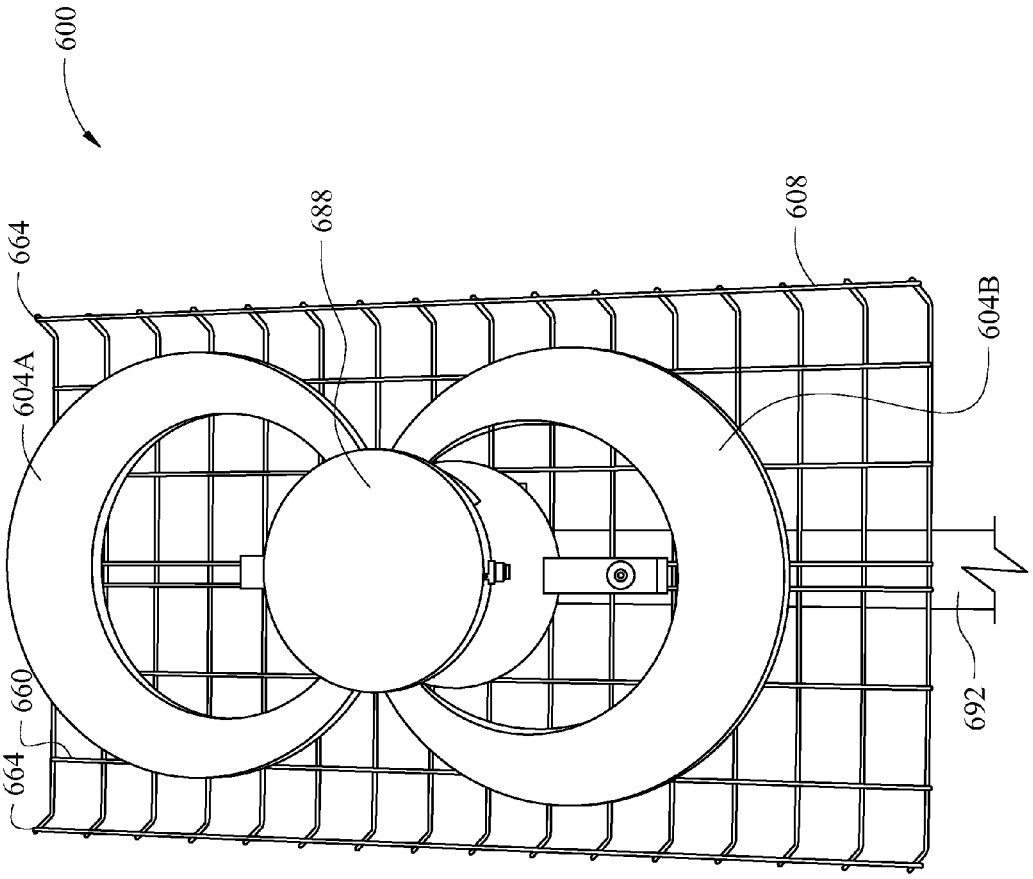


Fig. 19

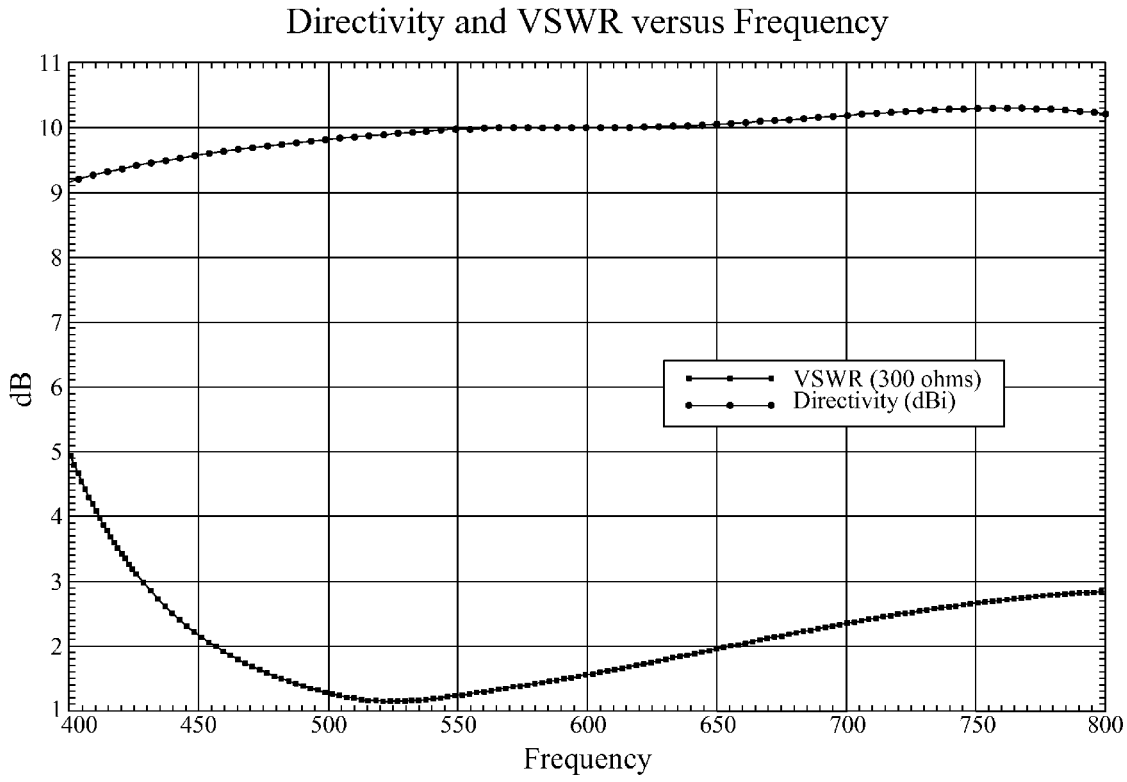

Directivity and VSWR versus Frequency
dB
Frequency
VSWR (300 ohms)
Directivity (dBi)
11
10
9
8
7
6
5
4
3
2
1
400
450
500
550
600
650
700
750
800

Fig. 20

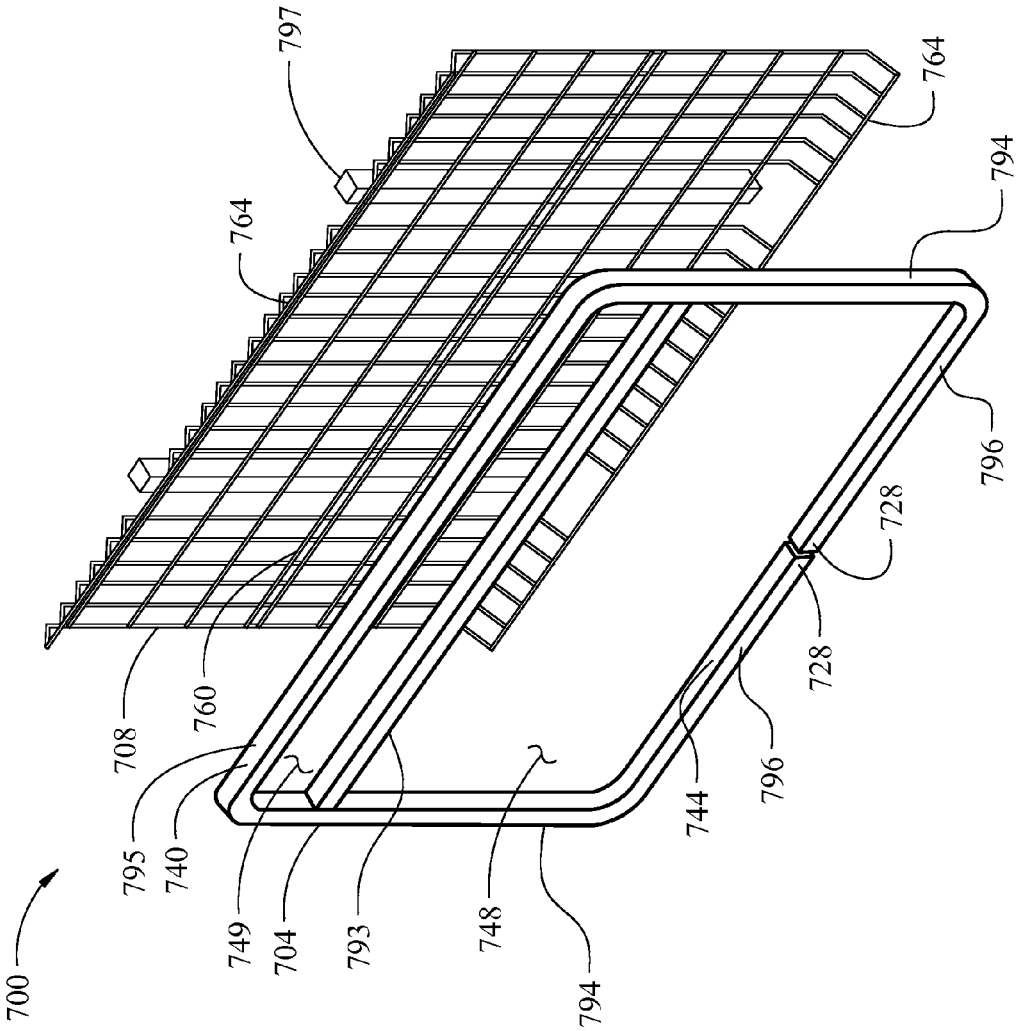

797
764
794
764
796
728
728
708
760
796
744
795
740
749
704
793
748
794
700

Fig. 21

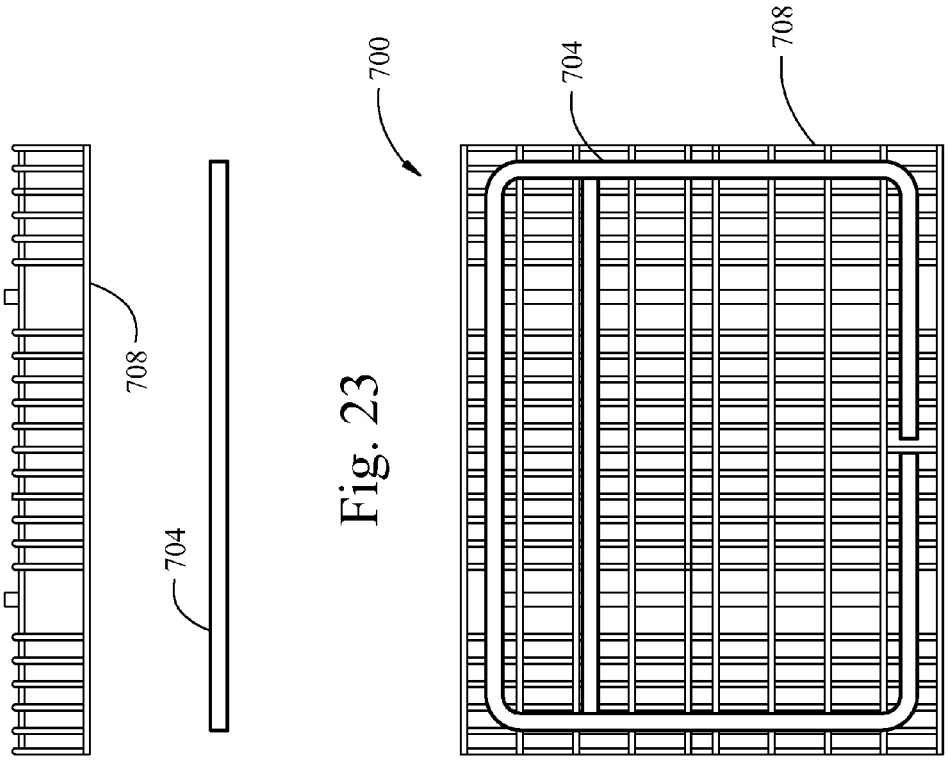


Fig. 22

Fig. 23

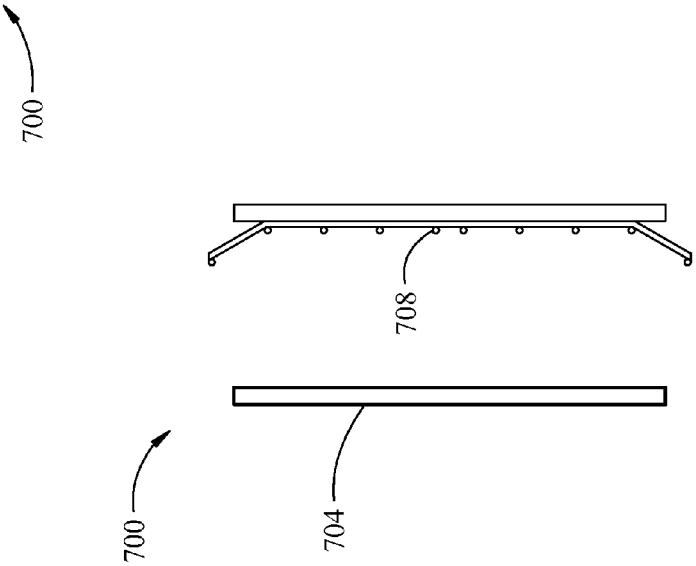


Fig. 24

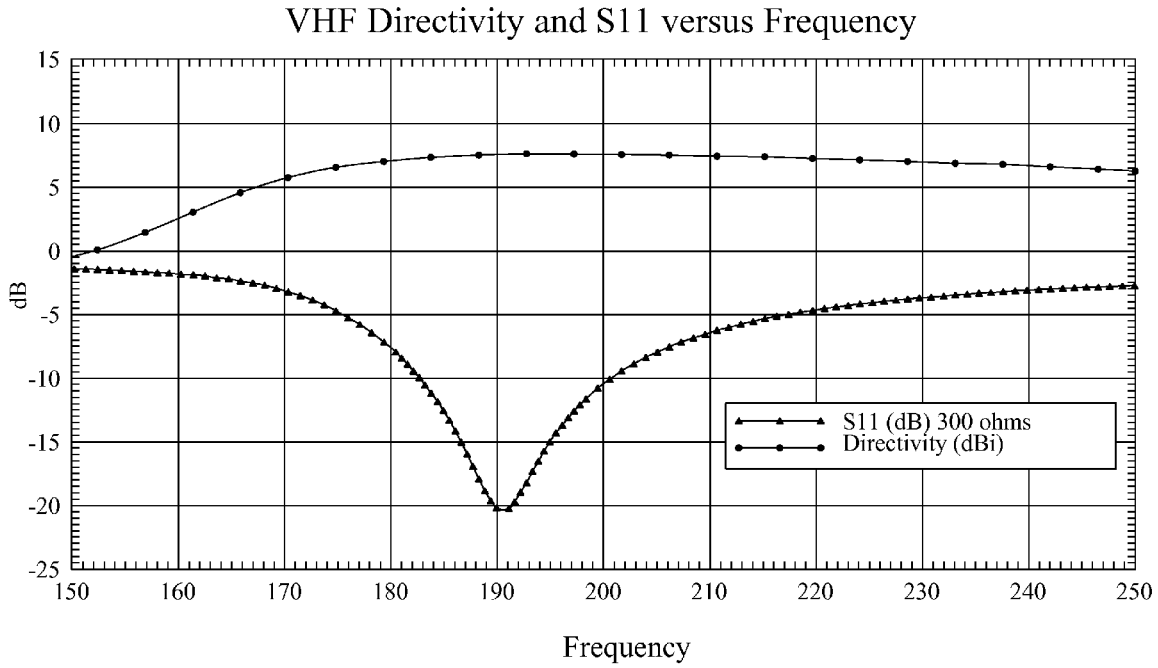

VHF Directivity and S11 versus Frequency
15
10
5
0
-5
-10
-15
-20
-25
dB
150
160
170
180
190
200
210
220
230
240
250
Frequency
S11 (dB) 300 ohms
Directivity (dBi)

Fig. 25

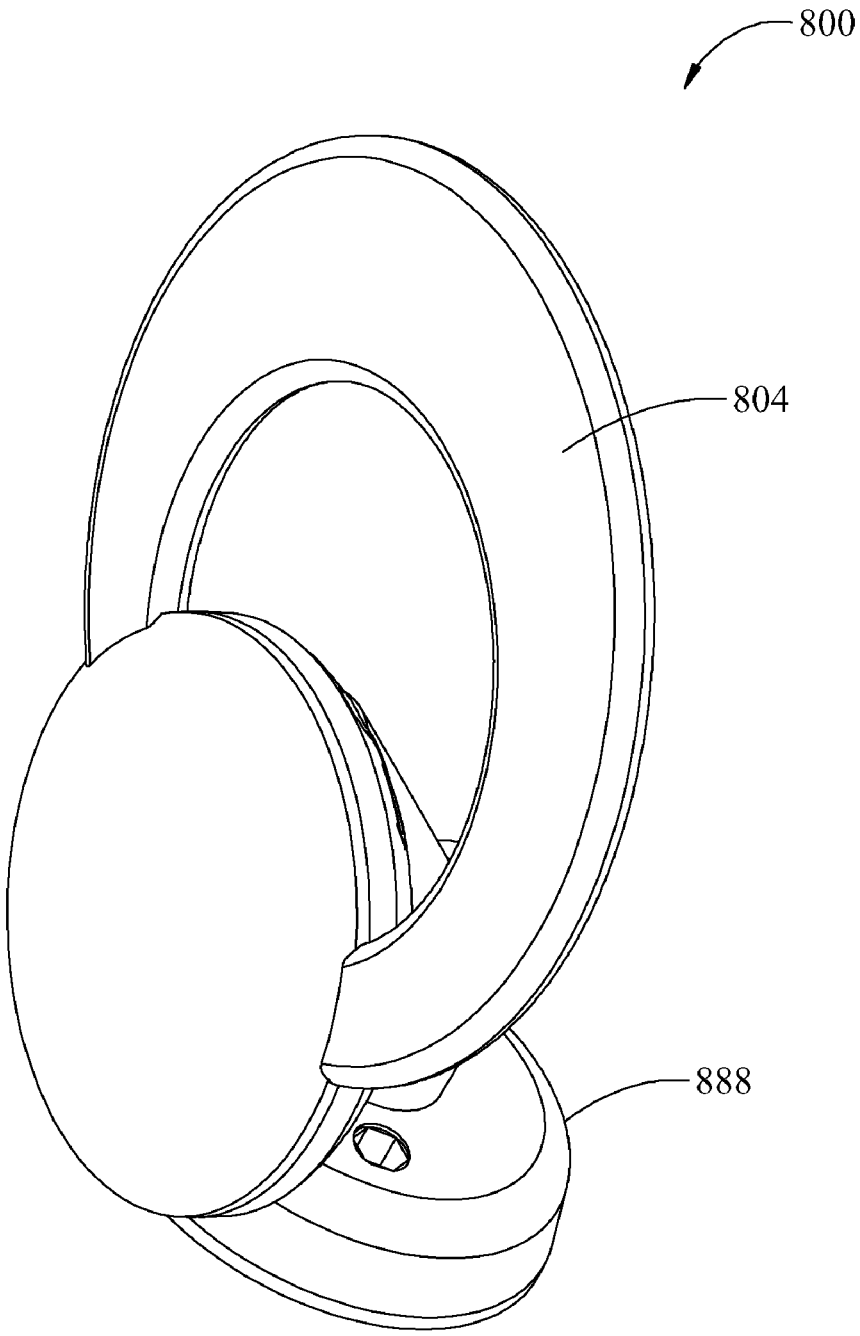


Fig. 26

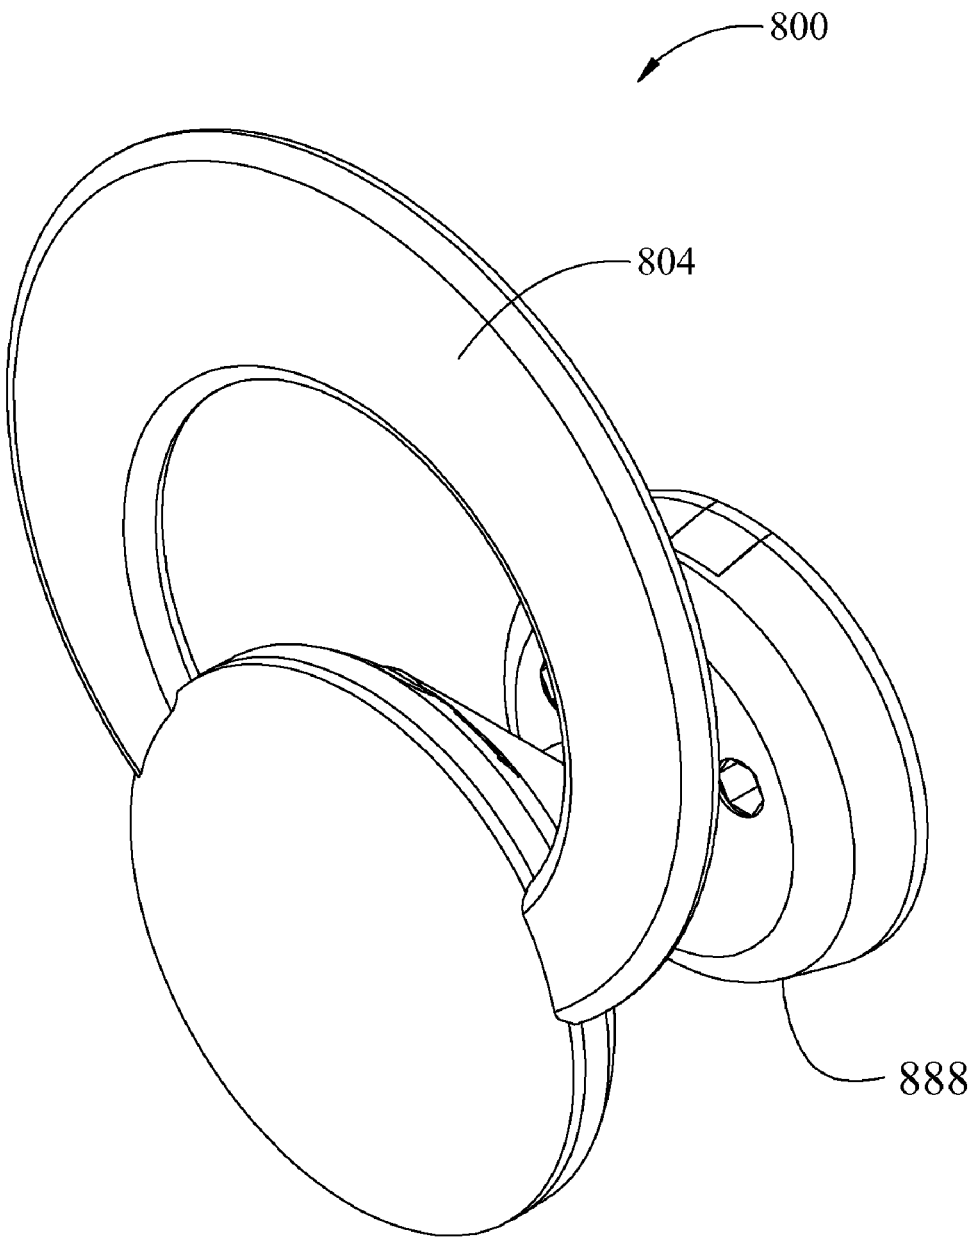


Fig. 27

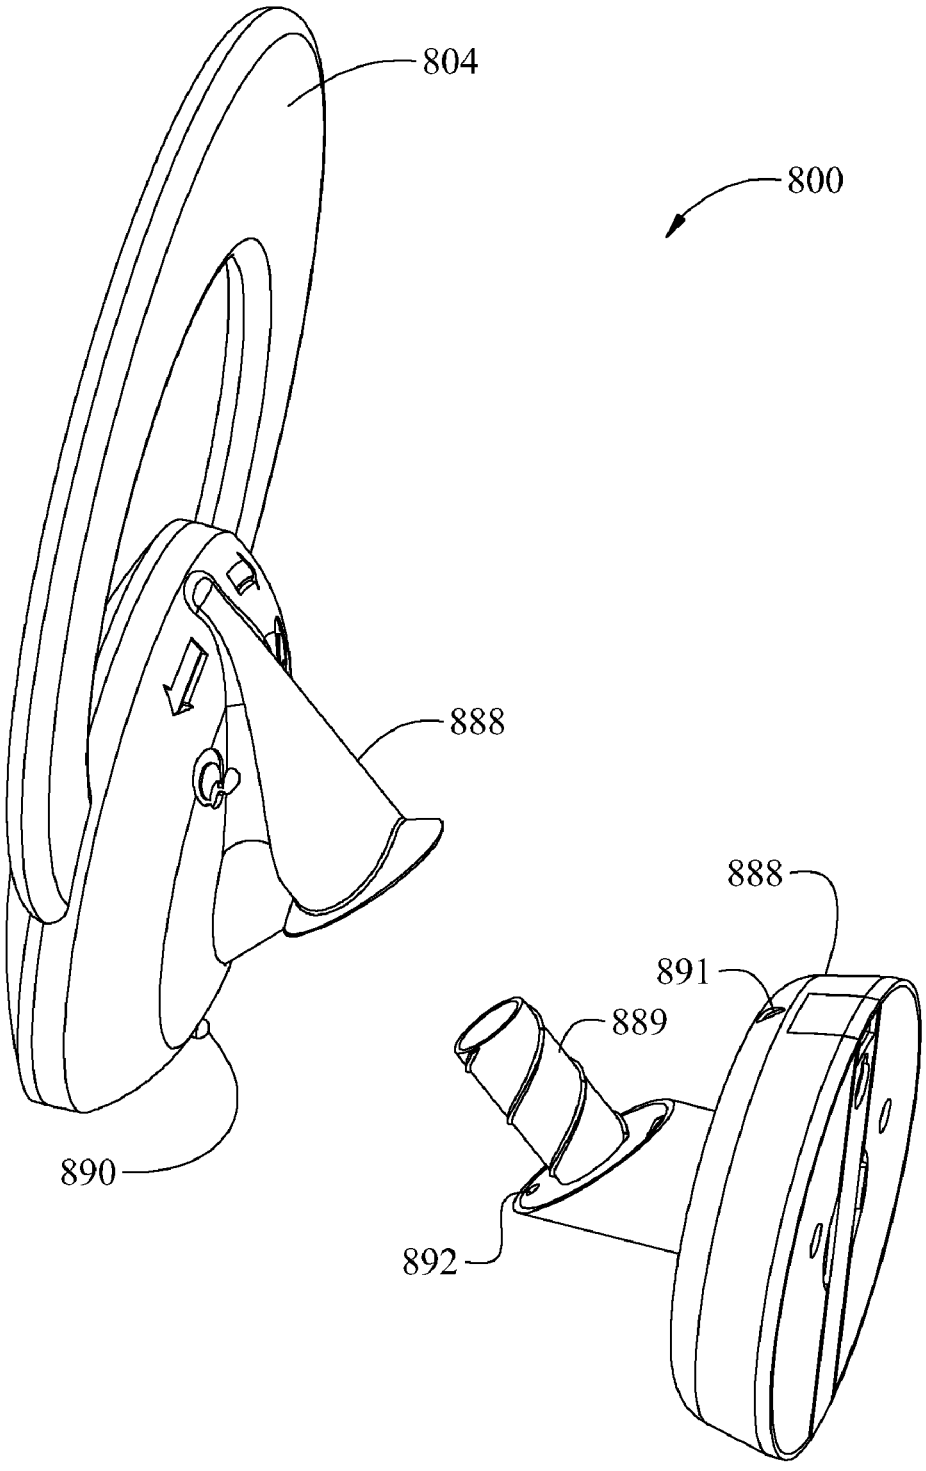


Fig. 28

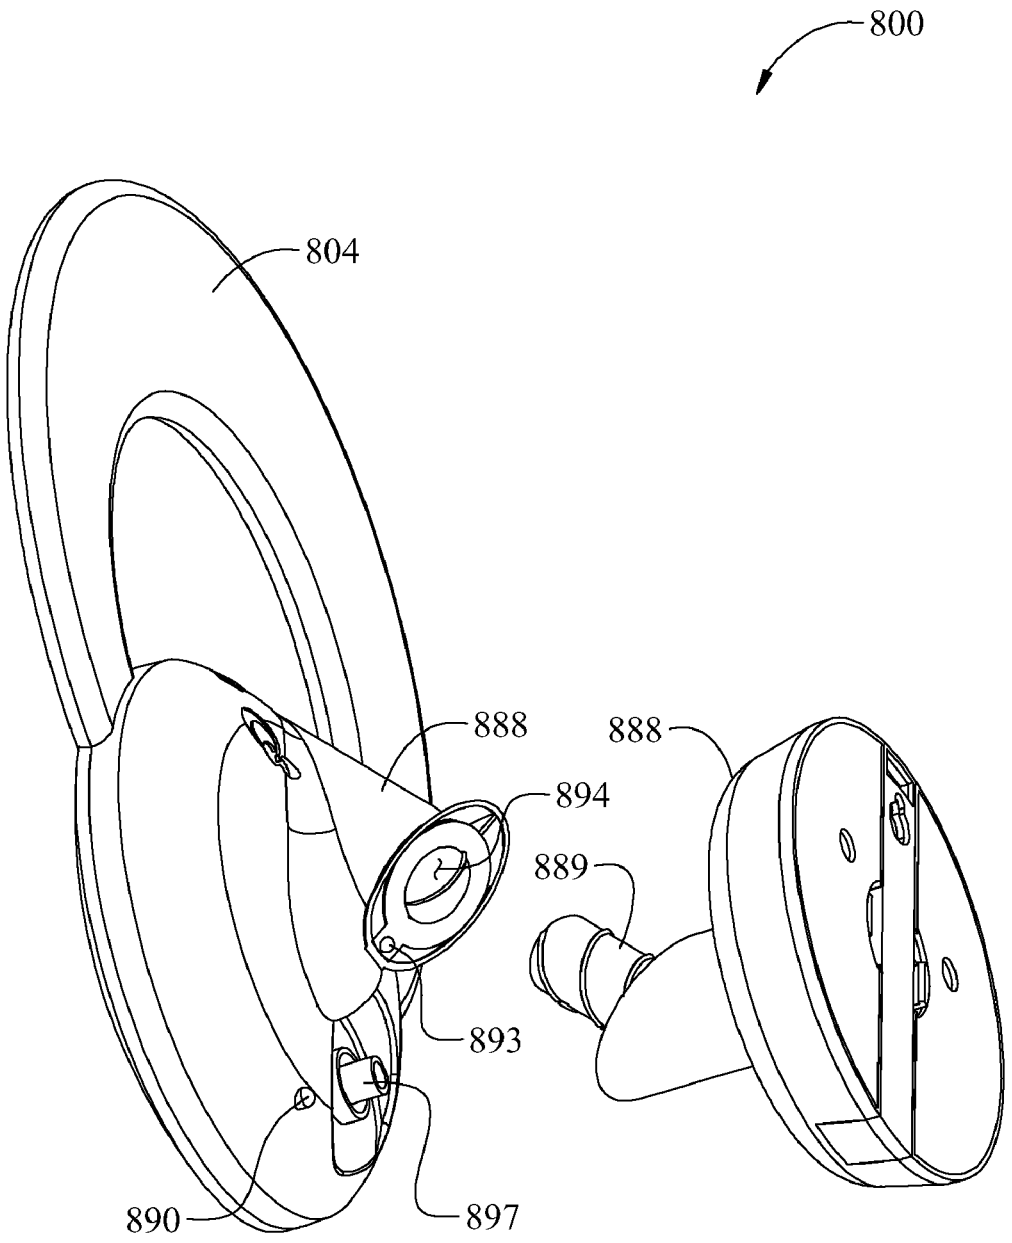


Fig. 29

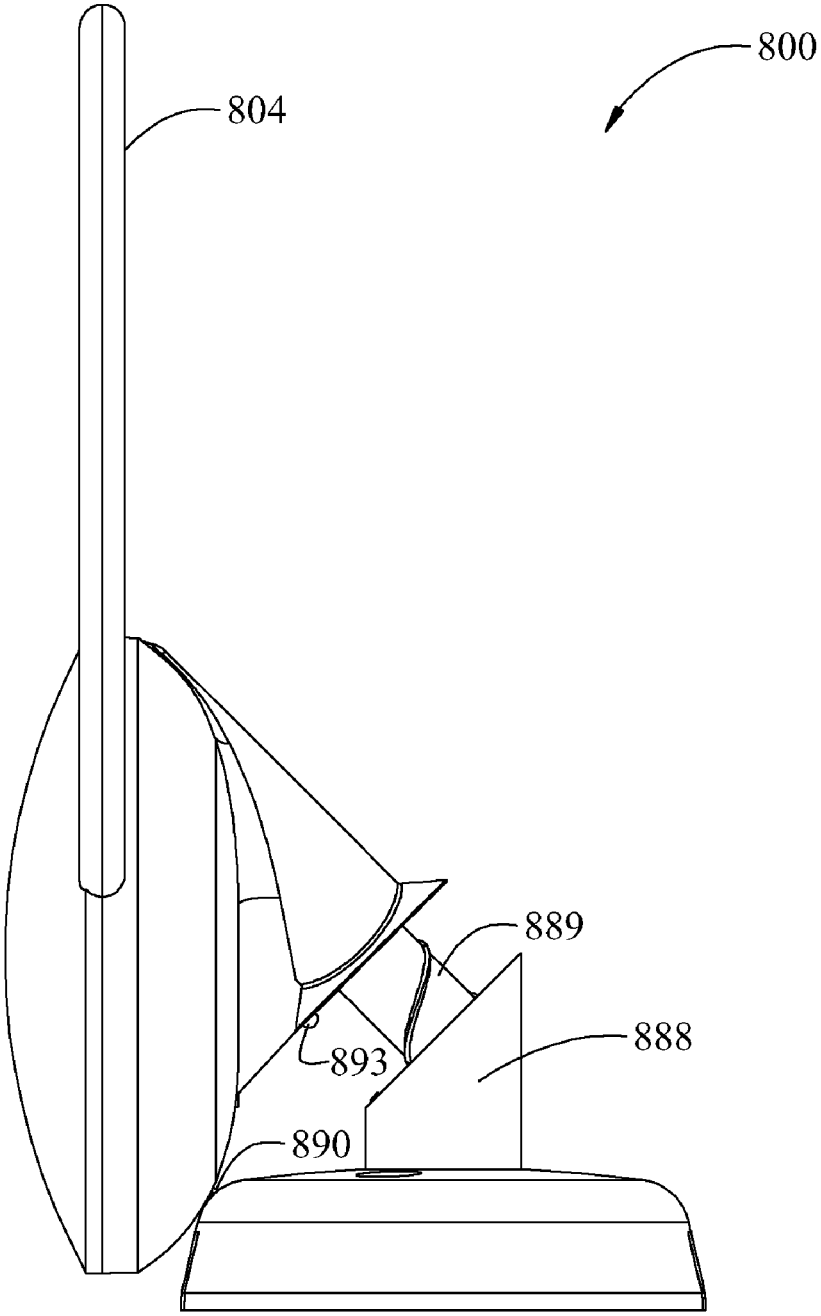


Fig. 30

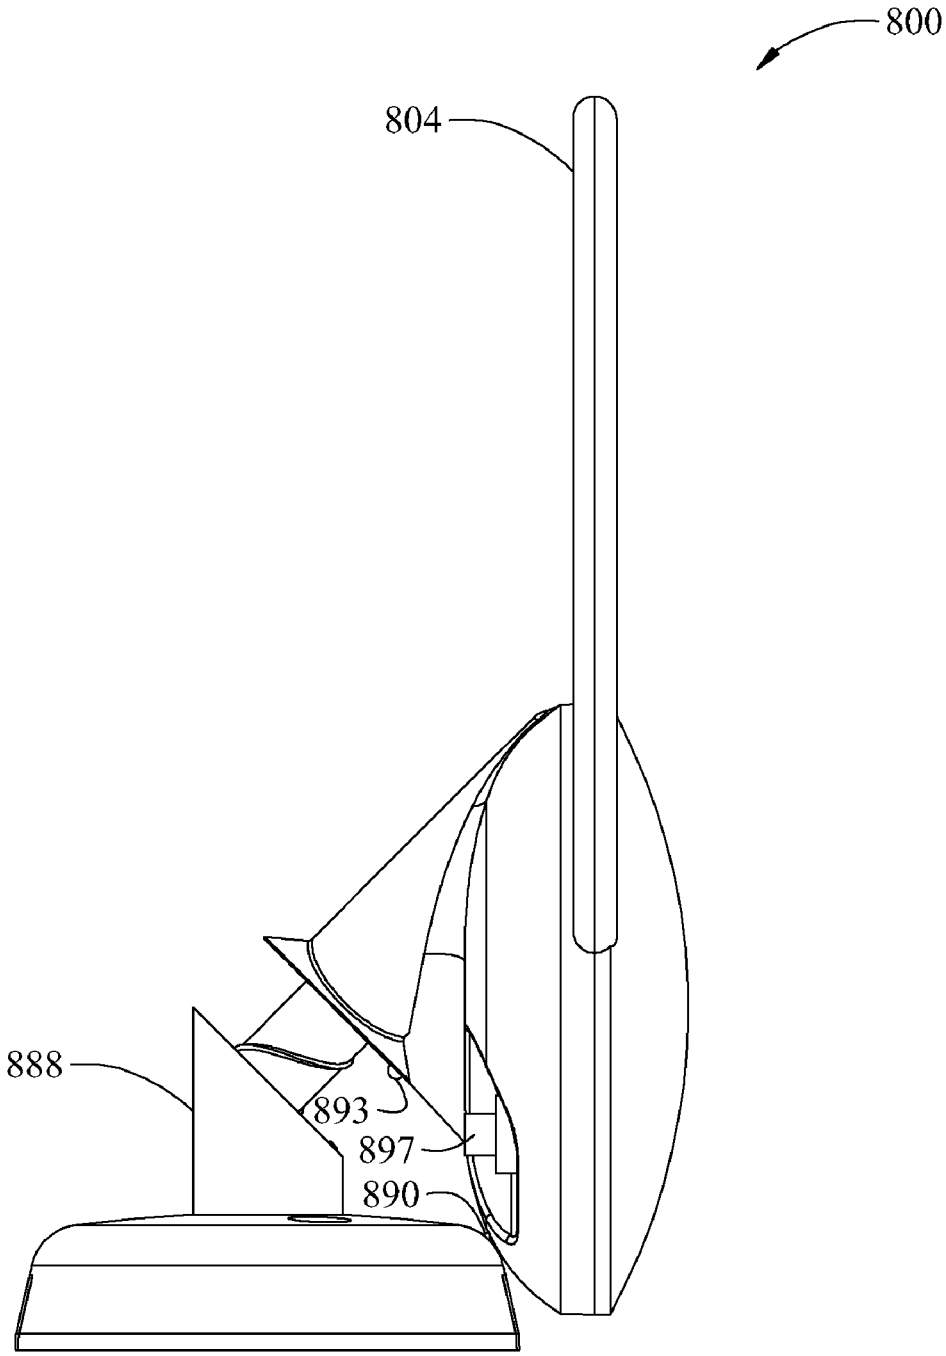


Fig. 31

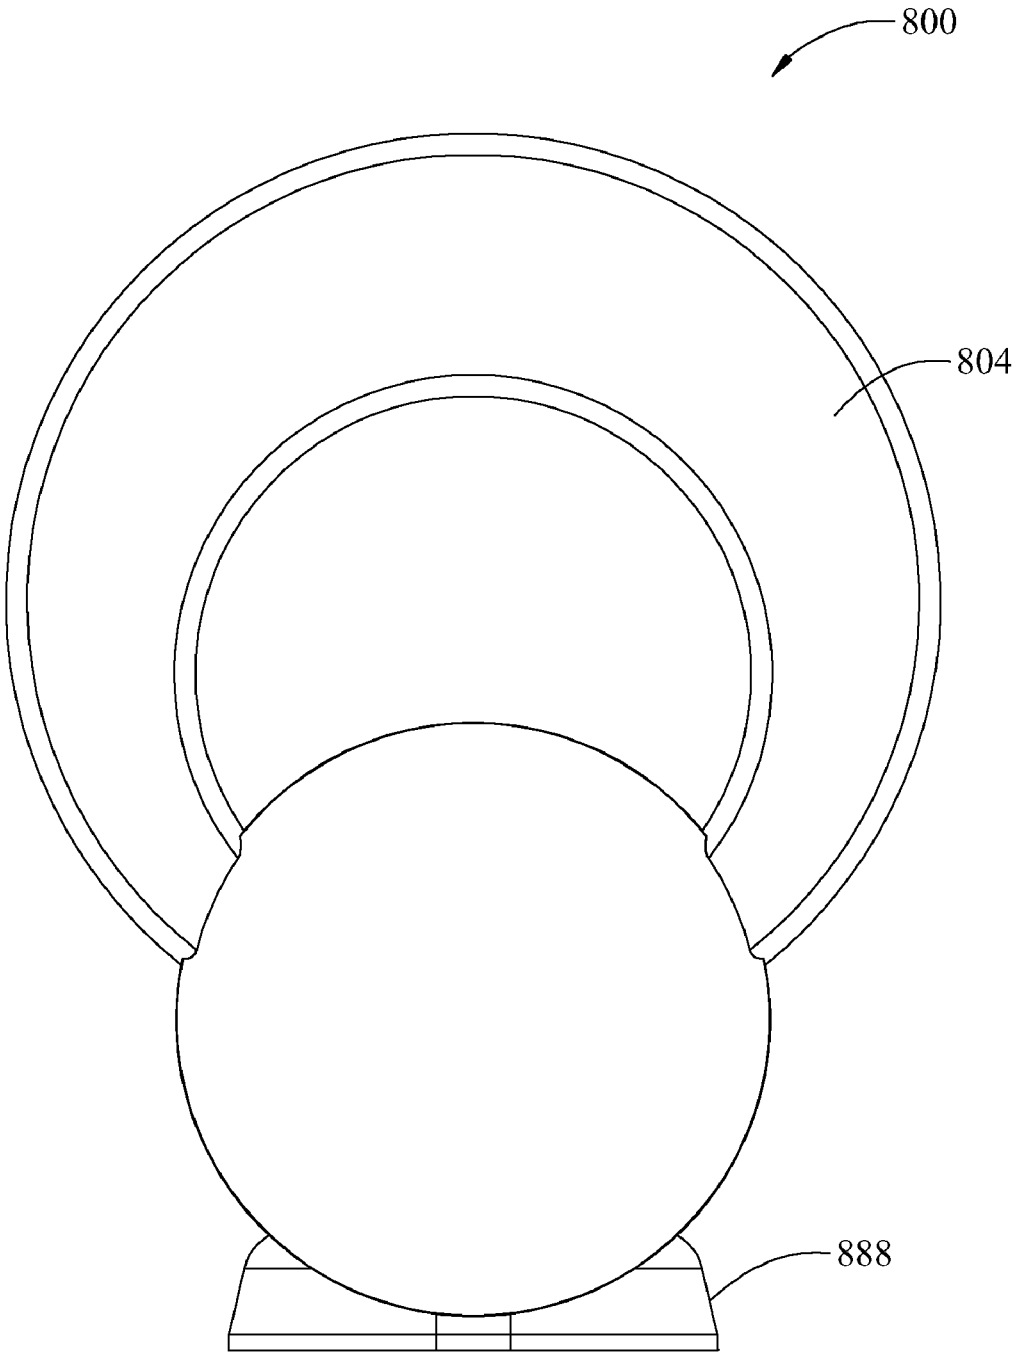


Fig. 32

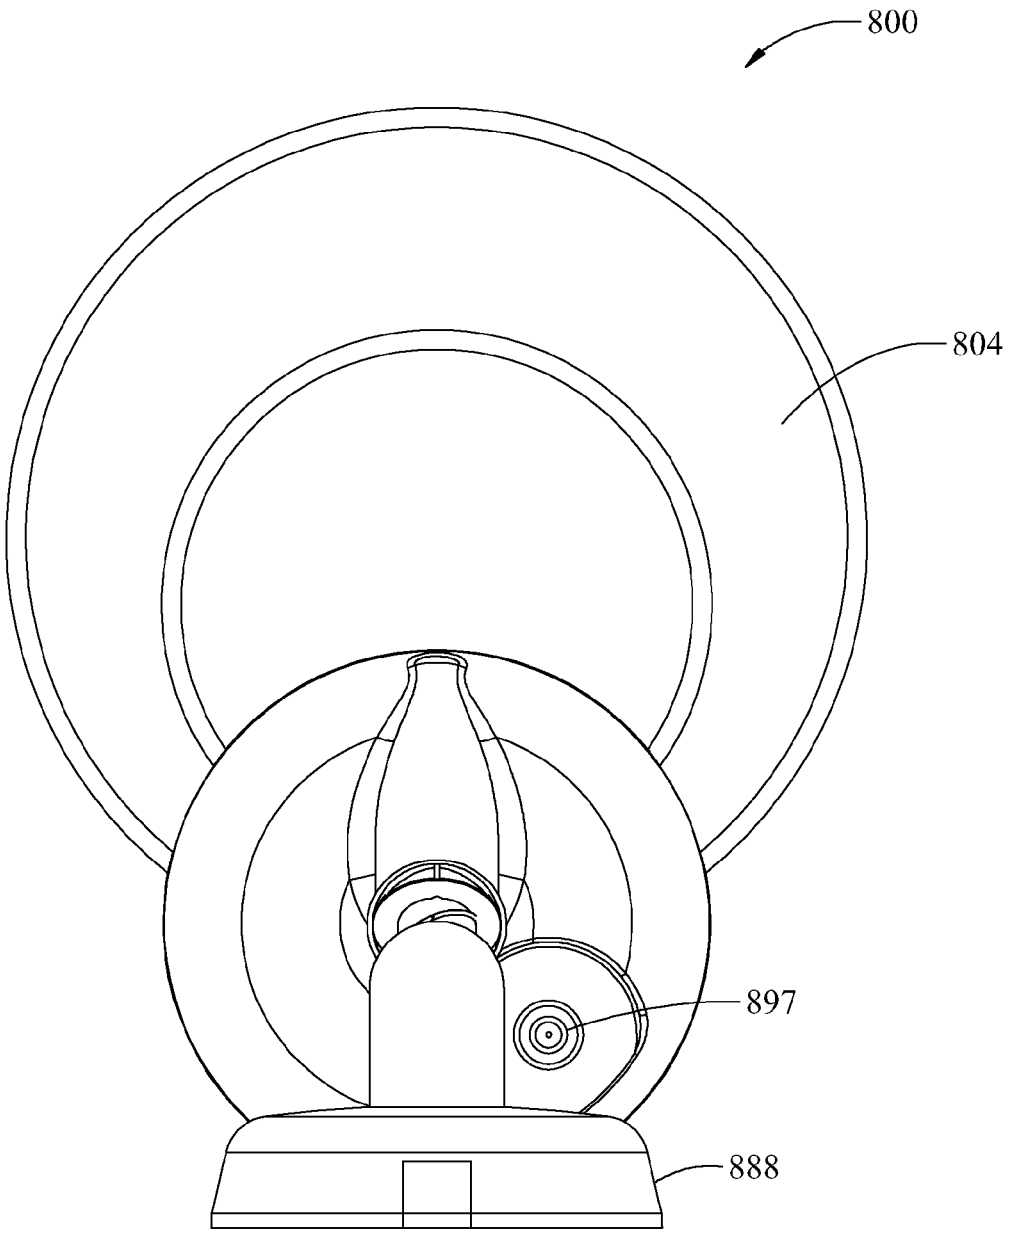


Fig. 33

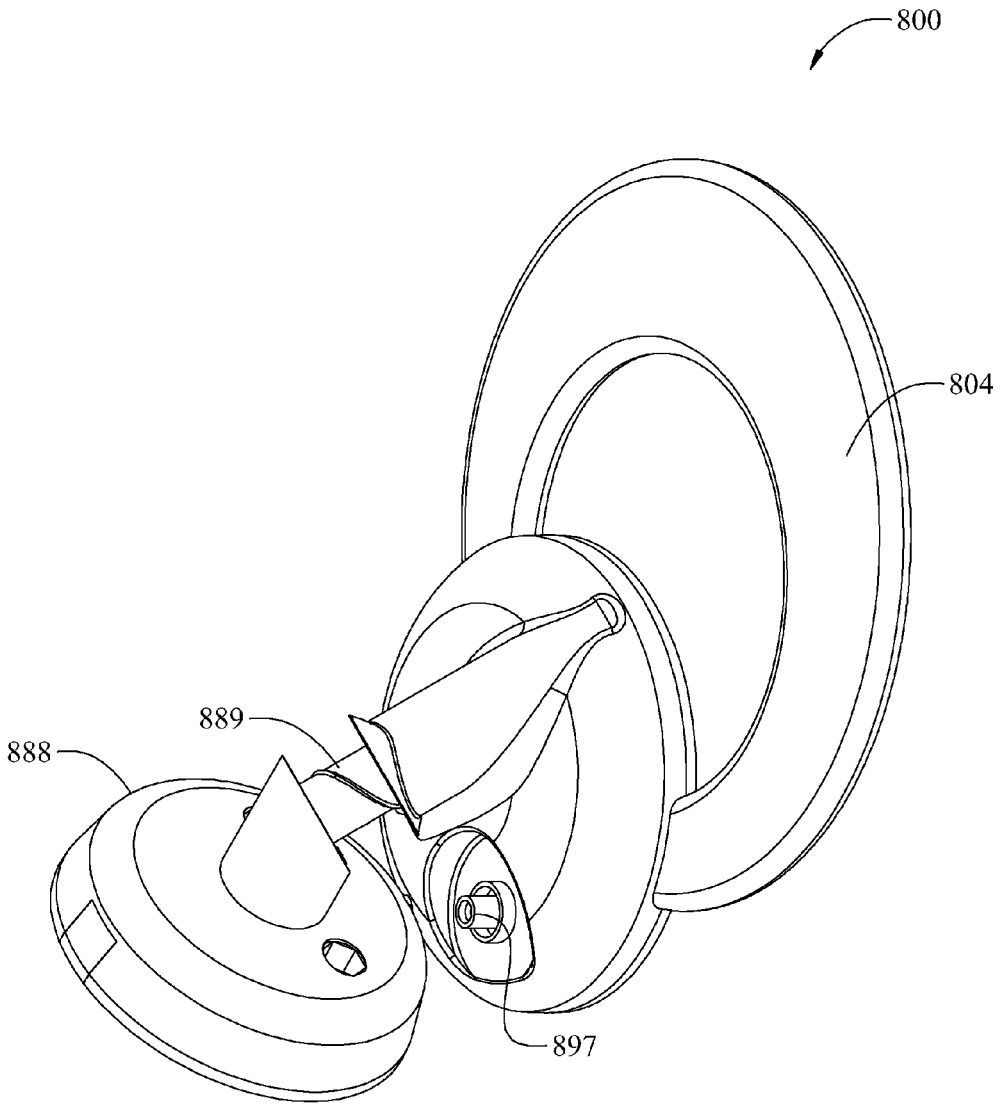


Fig. 34

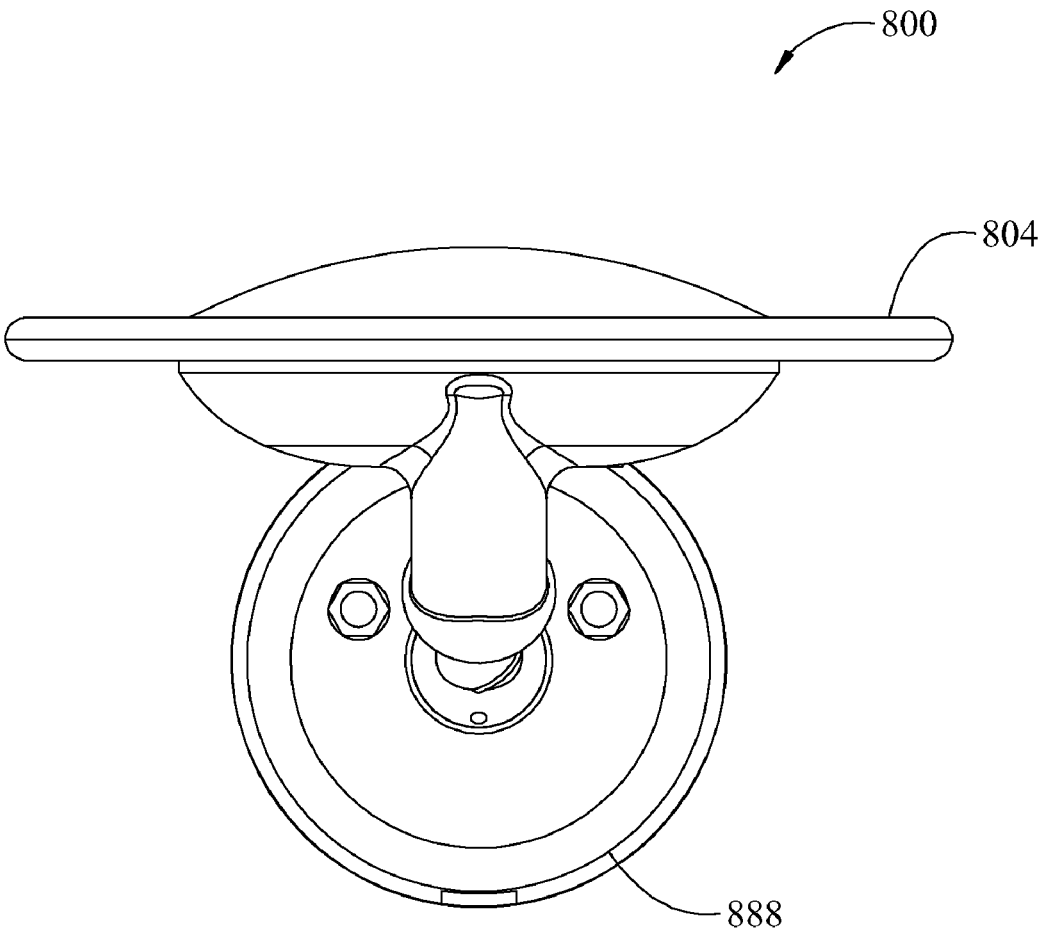


Fig. 35

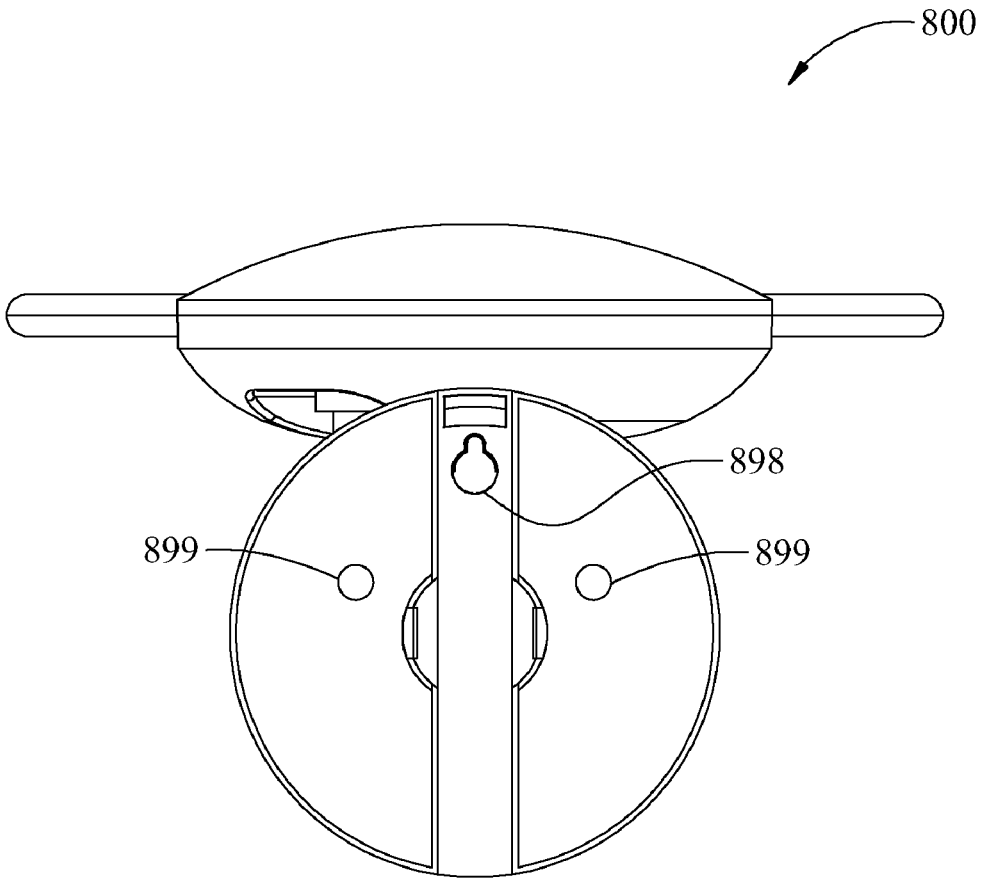


Fig. 36

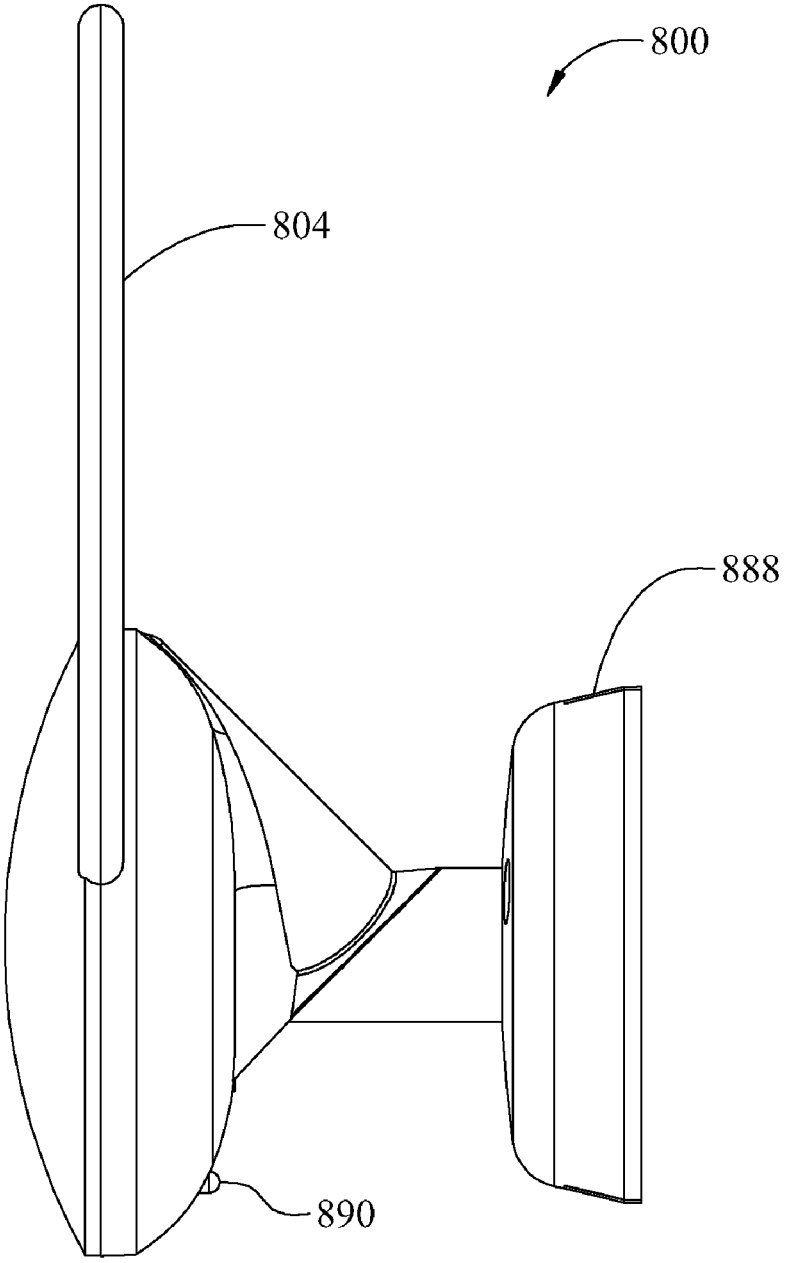


Fig. 37

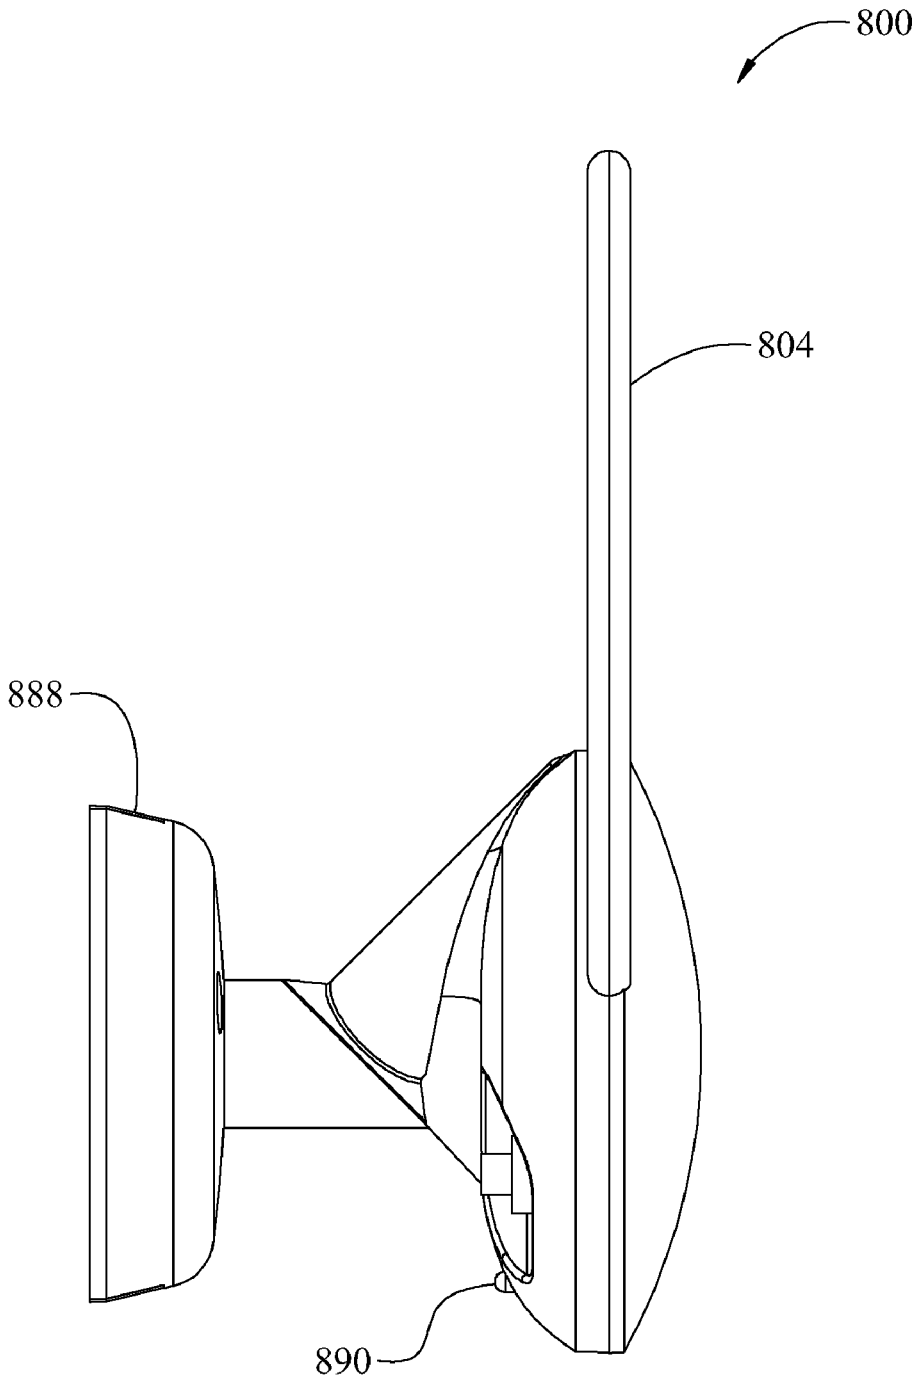


Fig. 38

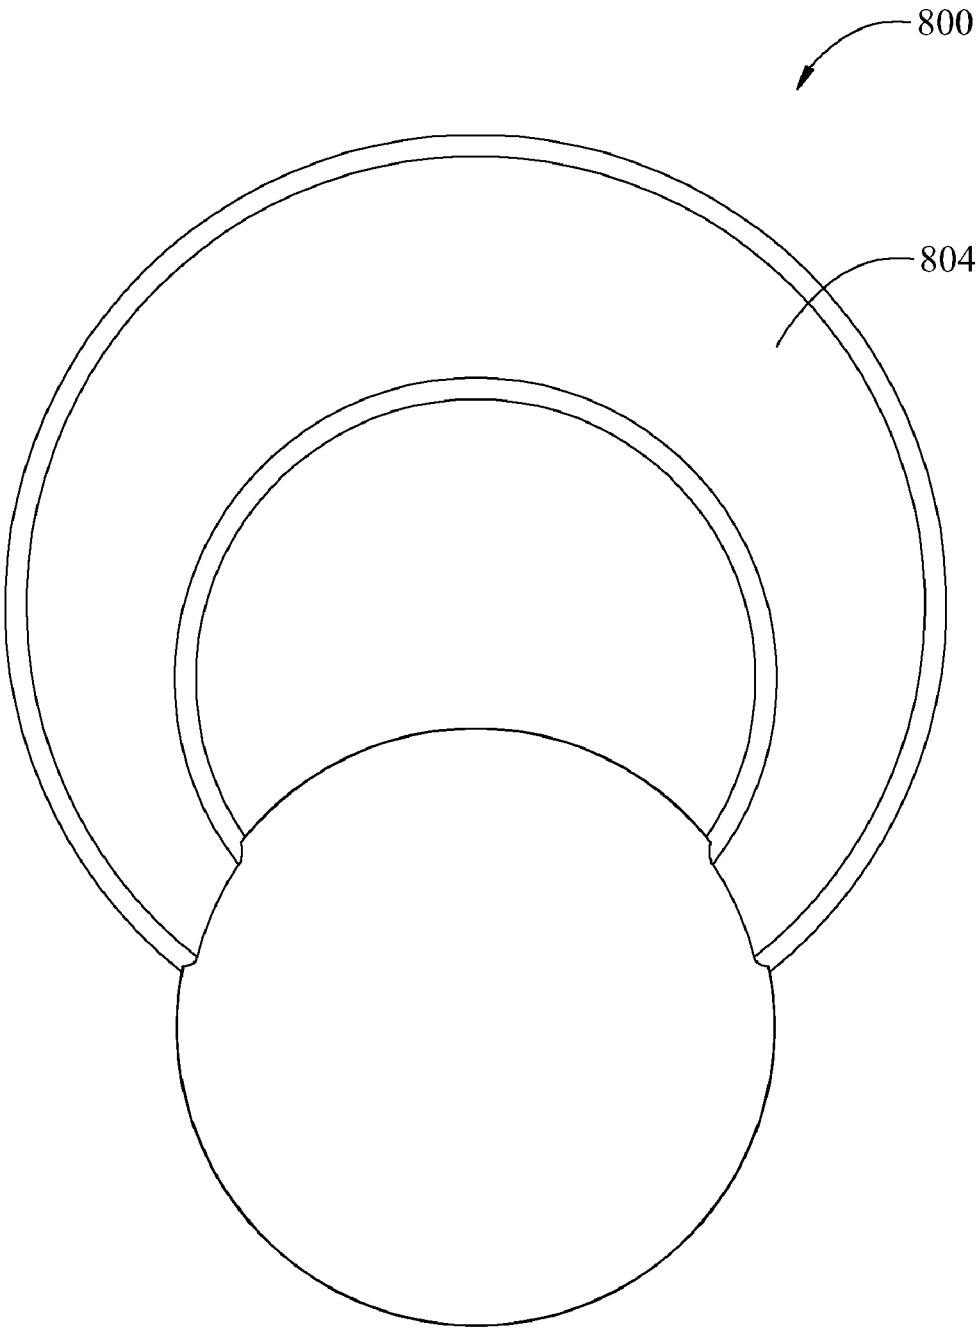


Fig. 39

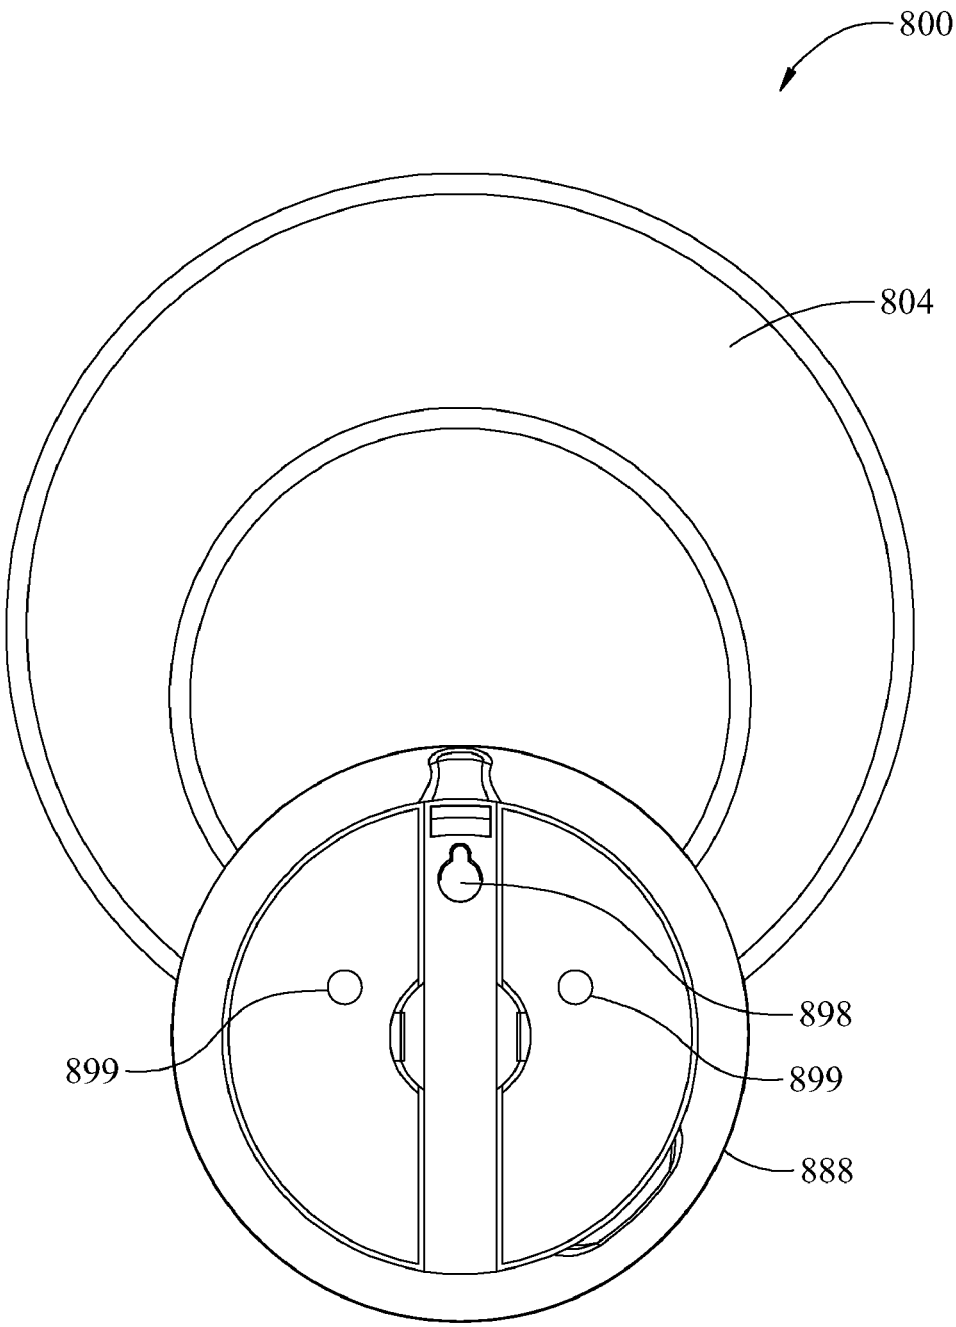


Fig. 40

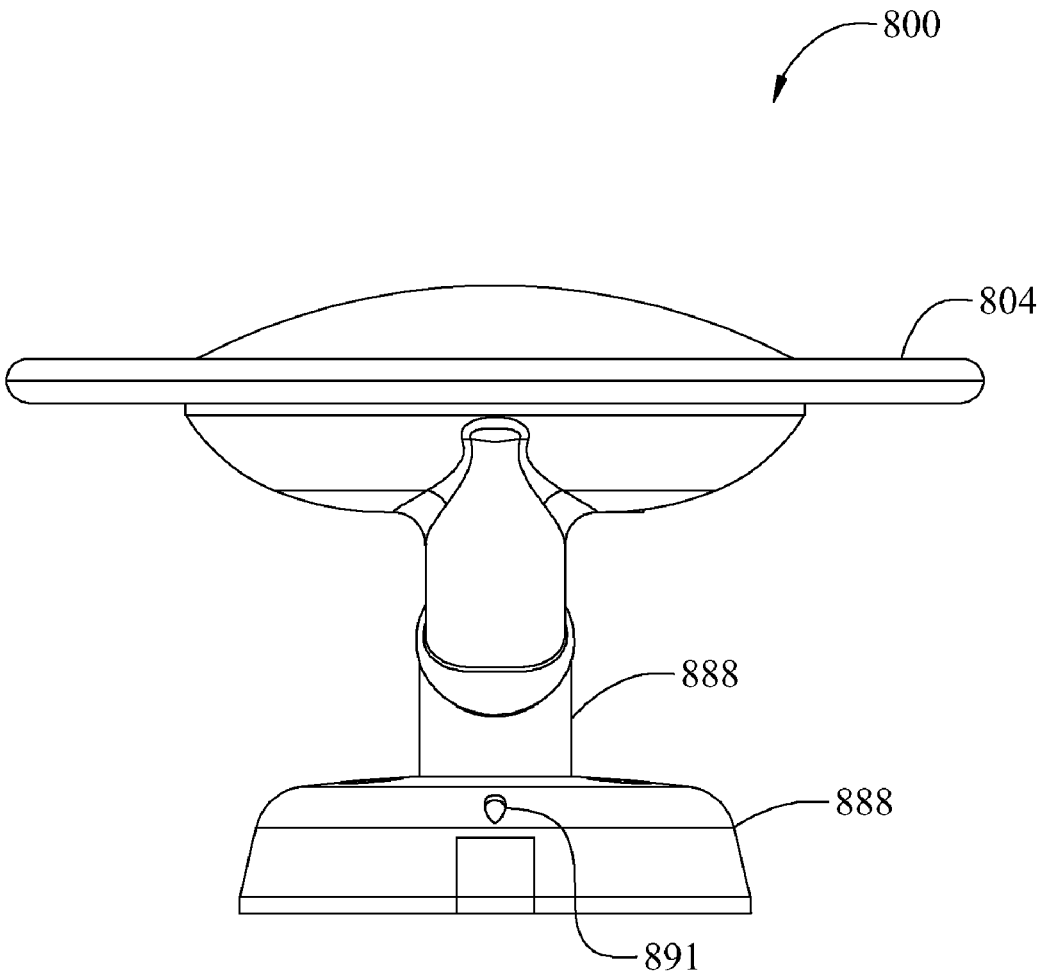


Fig. 41

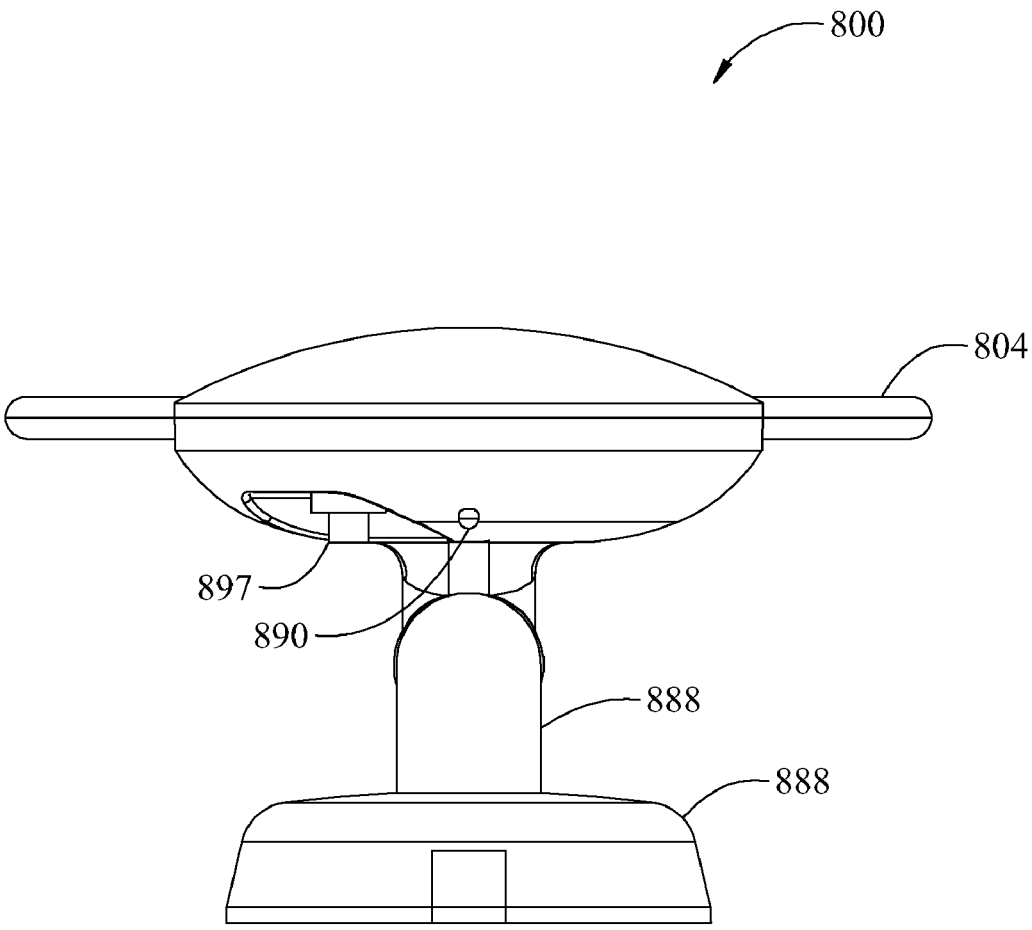


Fig. 42

ANTENNA ASSEMBLIES WITH ANTENNA ELEMENTS AND REFLECTORS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is also a continuation-in-part of U.S. patent application Ser. No. 12/040,464 filed Feb. 29, 2008 (which issues Nov. 23, 2010 as U.S. Pat. No. 7,839,347), which, in turn, claimed the benefit of U.S. Provisional Application No. 60/992,331 filed Dec. 5, 2007.

This application is also a continuation of U.S. patent application Ser. No. 12/606,636 filed Oct. 27, 2009.

U.S. patent application Ser. No. 12/606,636 filed Oct. 27, 2009 was a continuation-in-part of:

(1) U.S. patent application Ser. No. 12/050,133 filed Mar. 17, 2008 (now U.S. Pat. No. 7,609,222, issued Oct. 27, 2009), which, in turn, was a continuation-in-part of U.S. Design patent application No. 29/304,423 filed Feb. 29, 2008 (now U.S. Design Pat. D598,433 issued Aug. 18, 2009) and also claimed the benefit of U.S. Provisional Patent Application No. 60/992,331 filed Dec. 5, 2007 and U.S. Provisional Patent Application No. 61/034,431 filed Mar. 6, 2008; and

(2) U.S. patent application Ser. No. 12/040,464 filed Feb. 29, 2008, which, in turn, claimed the benefit of U.S. Provisional Patent Application No. 60/992,331 filed Dec. 5, 2007; and

(3) U.S. Design patent application No. 29/305,294 filed Mar. 17, 2008 (now U.S. Design Pat. D604,276 issued Nov. 17, 2009), which, in turn, was a continuation-in-part of U.S. patent application Ser. No. 12/040,464 filed Feb. 29, 2008 and was a continuation of U.S. patent application Ser. No. 12/050,133 filed Mar. 17, 2008 (now U.S. Pat. No. 7,609,222, issued Oct. 27, 2009; and

(4) PCT International Application No. PCT/US08/061,908 filed Apr. 29, 2008, which, in turn, claimed priority to U.S. Provisional Patent Application No. 60/992,331 filed Dec. 5, 2007, U.S. Provisional Patent Application No. 61/034,431 filed Mar. 6, 2008, U.S. patent application Ser. No. 12/040,464 filed Feb. 29, 2008, and U.S. patent application Ser. No. 12/050,133 filed Mar. 17, 2008.

The entire disclosures of the above applications are incorporated herein by reference.

FIELD

The present disclosure generally relates to antenna assemblies configured for reception of television signals, such as high definition television (HDTV) signals.

BACKGROUND

The statements in this section merely provide background information related to the present disclosure and may not constitute prior art.

Many people enjoy watching television. Recently, the television-watching experience has been greatly improved due to high definition television (HDTV). A great number of people pay for HDTV through their existing cable or satellite TV service provider. In fact, many people are unaware that HDTV signals are commonly broadcast over the free public airwaves. This means that HDTV signals may be received for free with the appropriate antenna.

SUMMARY

According to various aspects, exemplary embodiments are provided of antenna assemblies. In an exemplary embodiment, an antenna assembly generally includes at least one tapered loop antenna element having a generally annular shape with an opening. An antenna assembly may also include a rotatably convertible support including a base and an upper portion coupled to the tapered loop antenna element in some embodiments. The upper portion is rotatable relative to the base between a first configuration for supporting the tapered loop antenna element on a horizontal surface and a second configuration for supporting the tapered loop antenna element from a vertical surface.

In an exemplary embodiment, an antenna element configured for operating within a bandwidth ranging from about 470 megahertz to about 690 megahertz. The antenna element includes spaced-apart first and second end portions, a middle portion, and first and second curved portions extending from the respective first and second end portions to the middle portion such that the antenna element has a generally circular annular shape with a generally circular opening. The first and second curved portions gradually increase in width from the respective first and second end portions to the middle portion such that the middle portion is wider than the first and second end portions and such that an outer diameter of the antenna element is offset from a diameter of the generally circular opening. The first curved portion is a mirror image of the second curved portion.

According to various aspects, exemplary embodiments are provided of antenna assemblies. In one exemplary embodiment, an antenna assembly generally includes at least one antenna element having a generally annular shape with an opening. At least one reflector element is spaced-apart from the antenna element for reflecting electromagnetic waves generally towards the antenna element. Additional aspects provide methods relating to antenna assemblies, such as methods of using and/or making antenna assemblies.

Further aspects and features of the present disclosure will become apparent from the detailed description provided hereinafter. In addition, any one or more aspects of the present disclosure may be implemented individually or in any combination with any one or more of the other aspects of the present disclosure. It should be understood that the detailed description and specific examples, while indicating exemplary embodiments of the present disclosure, are intended for purposes of illustration only and are not intended to limit the scope of the present disclosure.

DRAWINGS

The drawings described herein are for illustration purposes only and are not intended to limit the scope of the present disclosure in any way.

FIG. **1** is an exploded perspective view of an antenna assembly including a tapered loop antenna element, a reflector, a housing (with the end pieces exploded away for clarity), and a PCB balun according to an exemplary embodiment;

FIG. **2** is a perspective view illustrating the antenna assembly shown in FIG. **1** after the components have been assembled and enclosed within the housing;

FIG. **3** is an end perspective view illustrating the tapered loop antenna element, reflector, and PCB balun shown in FIG. **1**;

FIG. **4** is a side elevation view of the components shown in FIG. **3**;

FIG. **5** is a front elevation view of the tapered loop antenna element shown in FIG. **1**;

FIG. **6** is a back elevation of the tapered loop antenna element shown in FIG. **1**;

FIG. **7** is a bottom plan view of the tapered loop antenna element shown in FIG. **1**;

FIG. **8** is a top plan view of the tapered loop antenna element shown in FIG. **1**;

FIG. **9** is a right elevation view of the tapered loop antenna element shown in FIG. **1**;

FIG. **10** is a left elevation view of the tapered loop antenna element shown in FIG. **1**;

FIG. **11** is a perspective view illustrating an exemplary use for the antenna assembly shown in FIG. **2** with the antenna assembly supported on top of a television with a coaxial cable connecting the antenna assembly to the television, whereby the antenna assembly is operable for receiving signals and communicating the same to the television via the coaxial cable;

FIG. **12** is an exemplary line graph showing computer-simulated gain/directivity and S11 versus frequency (in megahertz) for an exemplary embodiment of the antenna assembly with seventy-five ohm unbalanced coaxial feed;

FIG. **13** is a view of another exemplary embodiment of an antenna assembly having two tapered loop antenna elements, a reflector, and a PCB balun;

FIG. **14** is a view of another exemplary embodiment of an antenna assembly having a tapered loop antenna element and a support, and also showing the antenna assembly supported on top of a desk or table top;

FIG. **15** is a perspective view of the antenna assembly shown in FIG. **14**;

FIG. **16** is a perspective view of another exemplary embodiment of an antenna assembly having a tapered loop antenna element and an indoor wall mount/support, and also showing the antenna assembly mounted to a wall;

FIG. **17** is a perspective view of another exemplary embodiment of an antenna assembly having a tapered loop antenna element and a support, and showing the antenna assembly mounted outdoors to a vertical mast or pole;

FIG. **18** is another perspective view of the antenna assembly shown in FIG. **17**;

FIG. **19** is a perspective view of another exemplary embodiment of an antenna assembly having two tapered loop antenna elements and a support, and showing the antenna assembly mounted outdoors to a vertical mast or pole;

FIG. **20** is an exemplary line graph showing computer-simulated directivity and S11 versus frequency (in megahertz) for the antenna assembly shown in FIG. **13** according to an exemplary embodiment;

FIG. **21** is a perspective view of another exemplary embodiment of an antenna assembly configured for reception of VHF signals;

FIG. **22** is a front view of the antenna assembly shown in FIG. **21**;

FIG. **23** is a top view of the antenna assembly shown in FIG. **21**;

FIG. **24** is a side view of the antenna assembly shown in FIG. **21**;

FIG. **25** is an exemplary line graph showing computer-simulated directivity and VSWR (voltage standing wave ratio) versus frequency (in megahertz) for the antenna assembly shown in FIGS. **21** through **24** according to an exemplary embodiment;

FIG. **26** is a perspective view of another exemplary embodiment of an antenna assembly having a tapered loop antenna element and a support that is rotatably convertible between a first configuration (shown in FIG. **26**) for supporting the antenna assembly on a horizontal surface and a second configuration (shown in FIG. **27**) for supporting the antenna assembly from a vertical surface;

FIG. **27** is a perspective view of the antenna assembly shown in FIG. **26** but after the rotatably convertible support has been rotated to the second configuration for supporting the antenna assembly form a vertical surface;

FIG. **28** is an exploded perspective view of the antenna assembly shown in FIGS. **26** and **27** and illustrating the threaded stem portion and stopping members for retaining the rotatably convertible support in the first or second configuration;

FIG. **29** is another exploded perspective view of the antenna assembly shown in FIGS. **26** and **27**;

FIG. **30** is a right side view of the antenna assembly shown in FIG. **26** with the rotatably convertible support shown in the first configuration for supporting the antenna assembly on a horizontal surface;

FIG. **31** is a left side view of the antenna assembly shown in FIG. **26**;

FIG. **32** is a front view of the antenna assembly shown in FIG. **26**;

FIG. **33** is a back view of the antenna assembly shown in FIG. **26**;

FIG. **34** is an upper back perspective view of the antenna assembly shown in FIG. **26**;

FIG. **35** is a top view of the antenna assembly shown in FIG. **26**;

FIG. **36** is a bottom view of the antenna assembly shown in FIG. **26**;

FIG. **37** is a right side view of the antenna assembly shown in FIG. **27** with the rotatably convertible support shown in the second configuration for supporting the antenna assembly from a vertical surface;

FIG. **38** is a left side view of the antenna assembly shown in FIG. **27**;

FIG. **39** is a front view of the antenna assembly shown in FIG. **27**;

FIG. **40** is a back view of the antenna assembly shown in FIG. **27**;

FIG. **41** is a top view of the antenna assembly shown in FIG. **27**; and

FIG. **42** is a bottom view of the antenna assembly shown in FIG. **27**.

DETAILED DESCRIPTION

The following description is merely exemplary in nature and is in no way intended to limit the present disclosure, application, or uses.

FIGS. **1** through **4** illustrate an exemplary antenna assembly **100** embodying one or more aspects of the present disclosure. As shown in FIG. **1**, the antenna assembly **100** generally includes a tapered loop antenna element **104** (also shown in FIGS. **5** through **10**), a reflector element **108**, a balun **112**, and a housing **116** with removable end pieces or portions **120**.

As shown in FIG. **11**, the antenna assembly **100** may be used for receiving digital television signals (of which high definition television (HDTV) signals are a subset) and communicating the received signals to an external device, such as a television. In the illustrated embodiment, a coaxial cable **124** (FIGS. **2** and **11**) is used for transmitting signals received by the antenna assembly **100** to the television (FIG. **11**). The antenna assembly **100** may also be positioned on other generally horizontal surfaces, such as a tabletop, coffee tabletop, desktop, shelf, etc.). Alternative embodiments may include an antenna assembly positioned elsewhere and/or supported using other means.

In one example, the antenna assembly **100** may include a 75-ohm RG6 coaxial cable **124** fitted with an F-Type connector (although other suitable communication links may also be employed). Alternative embodiments may include other coaxial cables or other suitable communication links.

As shown in FIGS. **3**, **5**, and **6**, the tapered loop antenna element **104** has a generally annular shape cooperatively defined by an outer periphery or perimeter portion **140** and an inner periphery or perimeter portion **144**. The outer periphery or perimeter portion **140** is generally circular. The inner periphery or perimeter portion **144** is also generally circular, such that the tapered loop antenna element **104** has a generally circular opening **148**.

In some embodiments, the tapered loop antenna element has an outer diameter of about two hundred twenty millimeters and an inner diameter of about eighty millimeters. Some embodiments include the inner diameter being offset from the outer diameter such that the center of the circle defined generally by the inner perimeter portion **144** (the inner diameter's midpoint) is about twenty millimeters below the center of the circle defined generally by the outer perimeter portion **140** (the outer diameter's midpoint). Stated differently, the inner diameter may be offset from the outer diameter such that the inner diameter's midpoint is about twenty millimeters below the outer diameter's midpoint. The offsetting of the diameters thus provides a taper to the tapered loop antenna element **104** such that it has at least one portion (a top portion **126** shown in FIGS. **3**, **5**, and **6**) wider than another portion (the end portions **128** shown in FIGS. **3**, **5**, and **6**). The taper of the tapered loop antenna element **104** has been found to improve performance and aesthetics. As shown by FIGS. **1**, **3**, **5**, and **6**, the tapered loop antenna element **104** includes first and second halves or curved portions **150**, **152** that are generally symmetric such that the first half or curved portion **150** is a mirror-image of the second half or curved portion **152**. Each curved portion **150**, **152** extends generally between a corresponding end portion **128** and then tapers or gradually increases in width until the middle or top portion **126** of the tapered loop antenna element **104**. The tapered loop antenna element **104** may be positioned with the housing **116** in an orientation such that the wider portion **126** of the tapered loop antenna element **104** is at the top and the narrower end portions **128** are at the bottom.

With continued reference to FIGS. **3**, **5**, and **6**, the tapered loop antenna element **104** includes spaced-apart end portions **128**. In one particular example, the end portions **128** of the tapered loop antenna element **104** are spaced apart a distance of about 2.5 millimeters. Alternative embodiments may include an antenna element with end portions spaced apart greater than or less than 2.5 millimeters. For example, some embodiments include an antenna element with end portions spaced apart a distance of between about 2 millimeters to about 5 millimeters. The spaced-apart end portions may define an open slot therebetween that is operable to provide a gap feed for use with a balanced transmission line.

The end portions **128** include fastener holes **132** in a pattern corresponding to fastener holes **136** of the PCB balun **112**. Accordingly, mechanical fasteners (e.g., screws, etc.) may be inserted through the fastener holes **132**, **136** after they are aligned, for attaching the PCB balun **112** to the tapered loop antenna element **104**. Alternative embodiments may have differently configured fastener holes (e.g., more or less, different shapes, different sizes, different locations, etc.). Still other embodiments may include other attachment methods (e.g., soldering, etc.).

As shown in FIGS. **4** and **7-10**, the illustrated tapered loop antenna element **104** is substantially planar with a generally constant or uniform thickness. In one exemplary embodiment, the tapered loop antenna element **104** has a thickness of about 3 millimeters. Other embodiments may include a thicker or thinner antenna element. For example, some embodiments may include an antenna element with a thickness of about 35 micrometers (e.g., 1 oz copper, etc.), where the antenna element is mounted, supported, or installed on a printed circuit board. Further embodiments may include a free-standing, self-supporting antenna element made from aluminum, copper, etc. having a thickness between about 0.5 millimeters to about 5 millimeters, etc. In another exemplary embodiment, the antenna element comprises a relatively thin aluminum foil that is encased in a supporting plastic enclosure, which has been used to reduce material costs associated with the aluminum.

Alternative embodiments may include an antenna element that is configured differently than the tapered loop antenna element **104** shown in the figures. For example, other embodiments may include a non-tapered loop antenna element having a centered (not offset) opening. Additional embodiments may include a loop antenna element that defines a full generally circular loop or hoop without spaced-apart free end portions **128**. Further embodiments may include an antenna element having an outer periphery/perimeter portion, inner periphery/perimeter portion, and/or opening sized or shaped differently, such as with a non-circular shape (e.g., ovular, triangular, rectangular, etc.). The antenna element **104** (or any portion thereof) may also be provided in various configurations (e.g., shapes, sizes, etc.) depending at least in part on the intended end-use and signals to be received by the antenna assembly.

A wide range of materials may be used for the antenna element **104**. By way of example only, the tapered loop antenna element **104** may be formed from a metallic electrical conductor, such as aluminum, copper, stainless steel or other alloys, etc. In another embodiment, the tapered loop antenna element **104** may be stamped from sheet metal, or created by selective etching of a copper layer on a printed circuit board substrate.

FIGS. **1**, **3**, and **4** illustrate the exemplary reflector **108** that may be used with the antenna assembly **100**. As shown in FIG. **3**, the reflector **108** includes a generally flat or planar surface **160**. The reflector **108** also includes baffle, lip, or sidewall portions **164** extending outwardly relative to the surface **160**. The reflector **108** may be generally operable for reflecting electromagnetic waves generally towards the tapered loop antenna element **104**.

In regard to the size of the reflector and the spacing to the antenna element, the inventors hereof note the following. The size of the reflector and the spacing to the antenna element strongly impact performance. Placing the antenna element too close to the reflector provides an antenna with good gain, but narrows impedance bandwidth and poor VSWR (voltage standing wave ratio). Despite the reduced size, such designs are not suitable for the intended broadband application. If the antenna element is placed too far away from the reflector, the gain is reduced due to improper phasing. When the antenna element size and proportions, reflector size, baffle size, and spacing between antenna element and reflector are properly chosen, there is an optimum configuration that takes advantage of the near zone coupling with the electrically small reflector element to produce enhanced impedance bandwidth, while mitigating the effects of phase cancellation. The net result is an exemplary balance between impedance bandwidth, directivity or gain, radiation efficiency, and physical size.

In this illustrated embodiment, the reflector **108** is generally square with four perimeter sidewall portions **164**. Alternative embodiments may include a reflector with a different configuration (e.g., differently shaped, sized, less sidewall portions, etc.). The sidewalls may even be reversed so as to point opposite the antenna element. The contribution of the sidewalls is to slightly increase the effective electrical size of the reflector and improve impedance bandwidth.

Dimensionally, the reflector **108** of one exemplary embodiment has a generally square surface **160** with a length and width of about 228 millimeters. Continuing with this example, the reflector **108** may also have perimeter sidewall portions **164** each with a height of about 25.4 millimeters relative to the surface **160**. The dimensions provided in this paragraph (as are all dimensions set forth herein) are mere examples provided for purposes of illustration only, as any of the disclosed antenna components herein may be configured with different dimensions depending, for example, on the particular application and/or signals to be received or transmitted by the antenna assembly. For example, another embodiment may include a reflector **108** having a baffle, lip, or perimeter sidewall portions **164** having a height of about ten millimeters. Another embodiment may have the reflector **108** having a baffle, lip in the opposite direction to the antenna element. In such embodiment, it is possible to also add a top to the open box, which may serve as a shielding enclosure for a receiver board or other electronics.

With further reference to FIG. **3**, cutouts, openings, or notches **168** may be provided in the reflector's perimeter sidewall portions **164** to facilitate mounting of the reflector **108** within the housing **116** and/or attachment of the housing end pieces **120**. In an exemplary embodiment, the reflector **108** may be slidably positioned within the housing **116** (FIG. **1**). The fastener holes **172** of the housing end pieces **120** may be aligned with the reflector's openings **168**, such that fasteners may be inserted through the aligned openings **168**, **172**. Alternative embodiments may have reflectors without such openings, cutouts, or notches.

FIGS. **1**, **3**, and **4** illustrate an exemplary balun **112** that may be used with the antenna assembly **100** for converting a balanced line into an unbalanced line. In the illustrated embodiment, the antenna assembly **100** includes a printed circuit board having the balun **112**. The PCB having the balun **112** may be coupled to the tapered loop antenna element **104** via fasteners and fastener holes **132** and **136** (FIG. **3**). Alternative embodiments may include different means for connecting the balun **112** to the tapered loop antenna elements and/or different types of transformers besides the printed circuit board balun **112**.

As shown in FIG. **1**, the housing **116** includes end pieces **120** and a middle portion **180**. In this particular example, the end pieces **120** are removably attached to middle portion **180** by way of mechanical fasteners, fastener holes **172**, **174**, and threaded sockets **176**. Alternative embodiments may include a housing with an integrally-formed, fixed end piece. Other embodiments may include a housing with one or more removable end pieces that are snap-fit, friction fit, or interference fit with the housing middle portion without requiring mechanical fasteners.

As shown in FIG. **2**, the housing **116** is generally U-shaped with two spaced-apart upstanding portions or members **184** connected by a generally horizontal member or portion **186**. The members **184**, **186** cooperatively define a generally U-shaped profile for the housing **116** in this embodiment.

As shown by FIG. **1**, the tapered loop antenna element **104** may be positioned in a different upstanding member **184** than the upstanding member **184** in which the reflector **108** is positioned. In one particular example, the housing **116** is configured (e.g., shaped, sized, etc.) such that the tapered loop antenna element **104** is spaced apart from the reflector **108** by about 114.4 millimeters when the tapered loop antenna element **104** and reflector **108** are positioned into the respective different sides of the housing **116**. In addition, the housing **116** may be configured such that the housing's side portions **184** are generally square with a length and a width of about 25.4 centimeters. Accordingly, the antenna assembly **100** may thus be provided with a relatively small overall footprint. These shapes and dimensions are provided for purposes of illustration only, as the specific configuration (e.g., shape, size, etc.) of the housing may be changed depending, for example, on the particular application.

The housing **116** may be formed from various materials. In some embodiments, the housing **116** is formed from plastic. In those embodiments in which the antenna assembly is intended for use as an outdoor antenna, the housing may be formed from a weather resistant material (e.g., waterproof and/or ultra-violet resistant material, etc.). In addition, the housing **116** (or bottom portion thereof) may also be formed from a material so as to provide the bottom surface of the housing **116** with a relatively high coefficient of friction. This, in turn, would help the antenna assembly **100** resist sliding relative to the surface (e.g., top surface of television as shown in FIG. **11**, etc.) supporting the assembly **100**.

In some embodiments, the antenna assembly may also include a digital tuner/converter (ATSC receiver) built into or within the housing. In these exemplary embodiments, the digital tuner/converter may be operable for converting digital signals received by the antenna assembly to analog signals. In one exemplary example, a reflector with a reversed baffle and cover may serve as a shielded enclosure for the ATSC receiver. The shielded box reduces the effects of radiated or received interference upon the tuner circuitry. Placing the tuner in this enclosure conserves space and eliminates (or reduces) the potential for coupling between the antenna element and the tuner, which may otherwise negatively impact antenna impedance bandwidth and directivity.

In various embodiments, the antenna assembly **100** is tuned (and optimized in some embodiments) to receive signals having a frequency associated with high definition television (HDTV) within a frequency range of about 470 megahertz and about 690 megahertz. In such embodiments, narrowly tuning the antenna assembly **100** for receiving these HDTV signals allows the antenna element **104** to be smaller and yet still function adequately. With its smaller discrete physical size, the overall size of the antenna assembly **100** may be reduced so as to provide a reduced footprint for the antenna assembly **100**, which may, for example, be advantageous when the antenna assembly **100** is used indoors and placed on top of a television (e.g., FIG. **11**, etc.).

Exemplary operational parameters of the antenna assembly **100** will now be provided for purposes of illustration only. These operational parameters may be changed for other embodiments depending, for example, on the particular application and signals to be received by the antenna assembly.

In some embodiments, the antenna assembly **100** may be configured so as to have operational parameters substantially as shown in FIG. **12**, which illustrates computer-simulated gain/directivity and S11 versus frequency (in megahertz) for an exemplary embodiment of the antenna assembly **100** with seventy-five ohm unbalanced coaxial feed. In other embodiments, a 300 ohm balanced twin lead may be used.

FIG. **12** generally shows that the antenna assembly **100** has a relatively flat gain curve from about 470 MHz to about 698

MHz. In addition, FIG. **12** also shows that the antenna assembly **100** has a maximum gain of about 8 dBi (decibels referenced to isotropic gain) and an output with an impedance of about 75 Ohms.

In addition, FIG. **12** also shows that the S11 is below −6 dB across the frequency band from about 470 MHz to about 698 MHz. Values of S11 below this value ensure that the antenna is well matched and operates with high efficiency.

In addition, an antenna assembly may also be configured with fairly forgiving aiming. In such exemplary embodiments, the antenna assembly would thus not have to be re-aimed or redirected each time the television channel was changed.

FIG. **13** illustrates another embodiment of an antenna assembly **200** embodying one or more aspects of the present disclosure. In this illustrated embodiment, the antenna assembly **200** includes two generally side-by-side tapered loop antenna elements **204**A and **204**B in a generally figure eight configuration (as shown in FIG. **13**). The antenna assembly **200** also includes a reflector **208** and a printed circuit board balun **212**. The antenna assembly **200** may be provided with a housing similar to or different than housing **116**. Other than having two tapered loop antenna elements **204**A, **204**B (and improved antenna range that may be achieved thereby), the antenna assembly **200** may be operable and configured similar to the antenna assembly **100** in at least some embodiments thereof. FIG. **20** is an exemplary line graph showing computer-simulated directivity and S11 versus frequency (in megahertz) for the antenna assembly **200** according to an exemplary embodiment.

FIGS. **14** through **19** and **26** through **42** show additional exemplary embodiments of antenna assemblies embodying one or more aspects of the present disclosure. For example, FIGS. **14** and **15** show an antenna assembly **300** having a tapered loop antenna element **304** and a support **388**. In this exemplary embodiment, the antenna assembly **300** is supported on a horizontal surface **390**, such as the top surface of a desk, table top, television, etc. The antenna assembly **300** may also include a printed circuit board balun **312**. In some embodiments, an antenna assembly may include a tapered loop antenna element (e.g., **304**, **404**, **504**, etc.) with openings (e.g., holes, indents, recesses, voids, dimples, etc.) along the antenna element's middle portion and/or first and second curved portions, where the openings may be used, for example, to help align and/or retain the antenna element to a support. For example, a relatively thin metal antenna element with such openings may be supported by a plastic support structure that has protuberances, nubs, or protrusions that align with and are frictionally received within the openings of the antenna element, whereby the frictional engagement or snap fit helps retain the antenna element to the plastic support structure.

As another example, FIG. **16** shows an antenna assembly **400** having a tapered loop antenna element **404** and an indoor wall mount/support **488**. In this example, the antenna assembly is mounted to a vertical surface **490**, such a wall, etc. The antenna assembly **400** may also include a printed circuit board balun. The balun, however, is not illustrated in FIG. **10** because it is obscured by the support **488**.

FIGS. **26** through **42** illustrate another exemplary antenna assembly **800** having a tapered lop antenna element **804** and a rotatably convertible support, mount, or stand **888**. In this example, the tapered loop antenna **804** may be covered by or disposed within a cover material (e.g., plastic, other dielectric material, etc.), which may be the same material from which the support **888** is made.

In this example embodiment of the antenna assembly **800**, the rotatably convertible support **888** allows the antenna assembly **800** to be supported on a horizontal surface from a vertical surface depending on whether the support **888** is in a first or second configuration. For example, FIG. **26** illustrates the support or stand **888** in a first configuration in which the support **888** allows the antenna assembly **800** to be supported on a horizontal surface after being placed upon that horizontal surface. The horizontal surface upon which the antenna assembly **800** may be placed may comprise virtually any horizontal surface, such as the top of a desk, table top, television, etc. In some embodiments, the antenna assembly **800** may be fixedly attached or fastened to the horizontal surface by using mechanical fasteners (e.g., wood screws, etc.) inserted through fastener holes **899** (FIG. **36**) on the bottom of the support **888**. But the antenna assembly **800** may be attached to a horizontal surface using other methods, such as double-side adhesive tape, etc. Or, the antenna assembly **800** need not be attached to the horizontal surface at all.

FIG. **27** illustrates the support **888** in a second configuration that allows the antenna assembly **800** to be mounted to a vertical surface, such as wall, etc. In some embodiments, the antenna assembly **800** may be suspended from a nail or screw on a wall by way of the opening **898** (FIG. **40**) on the bottom of the support **888**.

By way of example, a user may rotate the support **888** to convert the support **888** from the first configuration (FIG. **26**) to the second configuration (FIG. **27**), or vice versa. As shown in FIGS. **28** and **29**, the rotatably convertible support **888** includes a threaded stem portion **889** and a threaded opening **894**. In this example, the threaded stem portion **889** extends upwardly from the base of the support **888**, and the threaded opening **894** is defined by the upper portion of the support **888**. In other embodiments, this may be reversed such that the base includes threaded opening, and the threaded stem portion extends downwardly from the upper portion of the mount.

With continued reference to FIGS. **28** and **29**, the support **888** also includes stops for retaining the rotatably convertible support **888** in the first or second configuration. In this example embodiment as shown in FIG. **28**, the support **888** include a first stop **890** (e.g., projection, nub, protrusion, protuberance, etc.) configured to be engagingly received within an opening **891**, for retaining the support **888** in the first configuration. FIGS. **30**, **31**, and **34** illustrate the engagement of the first stop **890** within the opening **891**, which inhibits relative rotation of the upper and lower portions of the support **888** thus helping retain support **888** in the first configuration for supporting the antenna assembly **800** on a horizontal surface. In this example, the first stop **890** is provided on the upper portion of the support **888** and the opening **891** is on the lower portion or base of the support **888**. In other embodiments, this may be reversed such that the base includes the first stop and the opening is on the upper portion of the support.

The support **888** also include a second stop **893** (FIG. **29**) (e.g., projection, nub, protrusion, protuberance, etc.) configured to be engagingly received within an opening **892** (FIG. **28**), for retaining the support **888** in the second configuration. The engagement of the second stop **893** within the opening **892** inhibits relative rotation of the upper and lower portions of the support **888** thus helping retain support **888** in the second configuration for supporting the antenna assembly **800** from a vertical surface. In this example, the second stop **893** is provided on the upper portion of the support **888** and the opening **892** is on the lower portion or base of the support

888. In other embodiments, this may be reversed such that the base includes the second stop and the opening is on the upper portion of the support.

In addition helping retain the support **888** in either the first or second configuration, the stops may also help provide a tactile and/or audible indication to the user to stop rotating the upper or lower portion of the support **888** relative to the other portion. For example, as a user is reconfiguring or converting the support **888** from the first or second configuration to the other configuration, the user may feel and/or hear an audible click as the corresponding first or second stop **890**, **893** is engaged into the corresponding opening **891**, **892**.

As shown in FIGS. **29** and **33**, the antenna assembly **800** includes a connector **897** for connecting a coaxial cable to the antenna assembly **800**. Alternative embodiments may include different types of connectors.

The antenna assemblies **300** (FIGS. **14** and **15**), **400** (FIG. **16**), and **800** (FIGS. **26** through **42**) do not include a reflector similar to the reflectors **108** and **208**. In some embodiments, the antenna assemblies **300**, **400**, **800** have provided good VSWR (voltage standing wave ratio) without a reflector. In other embodiments, however, the antenna assemblies **300**, **400**, **800** do include such a reflector. The antenna assemblies **300**, **400**, **800** may be operable and configured similar to the antenna assemblies **100** and **200** in at least some embodiments thereof. The illustrated circular shapes of the supports **388**, **488**, **888** are only exemplary embodiments. The support **388**, **488**, **888** may have many shapes (e.g. square, hexagonal, etc.). Removing a reflector may result in an antenna with less gain but wider bi-directional pattern, which may be advantageous for some situations where the signal strength level is high and from various directions.

Other exemplary embodiments of antenna assemblies for mounting outdoors are illustrated in FIGS. **17** through **19**. FIGS. **17** and **18** show an antenna assembly **500** having a tapered loop antenna element **504**, a printed circuit board balun **512**, and a support **588**, where the antenna assembly **500** is mounted outdoors to a vertical mast or pole **592**. FIG. **19** shows an antenna assembly **600** having two tapered loop antenna elements **604**A and **604**B and a support **688**, where the antenna assembly **600** is mounted outdoors to a vertical mast or pole **692**. In various embodiments, the supports **588** and/or **688** may be nonconvertible, or they may be rotatably convertible in a manner substantially similar to the support **888**.

The antenna assemblies **500** and **600** include reflectors **508** and **608**. Unlike the generally solid planar surface of reflectors **108** and **208**, the reflectors **508** and **608** have a grill or mesh surface **560** and **660**. The reflector **508** also includes two perimeter flanges **564**, while the reflector **608** includes two perimeter flanges **664**. A mesh reflector is generally preferred for outdoor applications to reduce wind loading. With outdoor uses, size is generally less important such that the mesh reflector may be made somewhat larger than the equivalent indoor models to compensate for the inefficiency of the mesh. The increased size of the mesh reflector also removes or reduces the need for a baffle, which is generally more important on indoor models that tend to be at about the limit of the size versus performance curves.

Any of the various embodiments shown in FIGS. **14** through **19** and FIGS. **26** through **42** may include one or more components (e.g., balun, reflector, etc.) similar to components of antenna assembly **100**. In addition, any of the various embodiments shown in FIGS. **14** through **19** and FIGS. **26** through **42** may be operable and configured similar to the antenna assembly **100** in at least some embodiments thereof.

According to some embodiments, an antenna element for signals in the very high frequency (VHF) range (e.g., 170 Megahertz to 216 Megahertz, etc.) may be less circular in shape but still based on an underlying electrical geometry of antenna elements disclosed herein. A VHF antenna element, for example, may be configured to provide electrical paths of more than one length along an inner and outer periphery of the antenna element. The proper combination of such an element with an electrically small reflector may thus result in superior balance of directivity, efficiency, bandwidth, and physical size as what may be achieved in other example antenna assemblies disclosed herein.

For example, FIGS. **21** through **24** illustrate an exemplary embodiment of an antenna assembly **700**, which may be used for reception of VHF signals (e.g., signals within a frequency bandwidth of 170 Megahertz to 216 Megahertz, etc.). As shown, the antenna assembly **700** includes an antenna element **704** and a reflector **708**.

The antenna element **704** has an outer periphery or perimeter portion **740** and an inner periphery or perimeter portion **744**. The outer periphery or perimeter portion **740** is generally rectangular. The inner periphery or perimeter portion **744** is also generally rectangular. In addition, the antenna element **704** also includes a tuning bar **793** disposed or extending generally between the two side members **794** of the antenna element **704**. The tuning bar **793** is generally parallel with the top member **795** and bottom members **796** of the antenna element **704**. The tuning bar **793** extends across the antenna element **704**, such that the antenna element **704** includes a lower generally rectangular opening **748** and an upper generally rectangular opening **749**. The antenna element **704** further includes spaced-apart end portions **728**.

With the tuning bar **793**, the antenna element **704** includes first and second electrical paths of different lengths, where the shorter electrical path includes the tuning bar **793** and the longer electrical path does not. The longer electrical path is defined by an outer loop of the antenna element **704**, which includes the antenna element's spaced-apart end portions **728**, bottom members **796**, side members **794**, and top member **795**. The shorter electrical path is defined by an inner loop of the antenna element **704**, which includes the antenna element's spaced-apart end portions **728**, bottom members **796**, portions of the side members **794** (the portions between the tuning bar **793** and bottom members **796**), and the tuning bar **793**. By a complex coupling theory, the electrical paths defined by the inner and outer loops of the antenna element **704** allow for efficient operation within the VHF bandwidth range of about 170 Megahertz to about 216 Megahertz in some embodiments. With the greater efficiency, the size of the antenna assembly may thus be reduced (e.g., 75% size reduction, etc.) and still provide satisfactory operating characteristics.

The tuning bar **793** may be configured (e.g., sized, shaped, located, etc.) so as to provide impedance matching for the antenna element **704**. In some example embodiments, the tuning bar **793** may provide the antenna element **704** with a more closely matched impedance to a 300 ohm transformer.

In one particular example, the end portions **728** of the antenna element **704** are spaced apart a distance of about 2.5 millimeters. By way of further example, the antenna element **704** may be configured to have a width (from left to right in FIG. **22**) of about 600 millimeters, a height (from top to bottom in FIG. **22**) of about 400 millimeters, and have the tuning bar **793** spaced above the bottom members **796** by a distance of about 278 millimeters. A wide range of materials may be used for the antenna element **704**. In one exemplary embodiment, the antenna element **704** is made from alumi-

num hollow tubing with a ¾ inch by ¾ inch square cross section. In this particular example, the various portions (**728**, **793**, **794**, **795**, **796**) of the antenna element **704** are all formed from the same aluminum tubing, although this is not required for all embodiments. Alternative embodiments may include an antenna element configured differently, such as from different materials (e.g., other materials besides aluminum, antenna elements with portions formed from different materials, etc.), non-rectangular shapes and/or different dimensions (e.g., end portions spaced apart greater than or less than 2.5 millimeters, etc.). For example, some embodiments include an antenna element with end portions spaced apart a distance of between about 2 millimeters to about 5 millimeters. The spaced-apart end portions may define an open slot therebetween that is operable to provide a gap feed for use with a balanced transmission line.

With continued reference to FIGS. **21** through **24**, the reflector **708** includes a grill or mesh surface **760**. The reflector **708** also includes two perimeter flanges **764**. The perimeter flanges **764** may extend outwardly from the mesh surface **760**. In addition, members **797** may be disposed behind the mesh surface **760**, to provide reinforcement to the mesh surface **760** and/or a means for supporting or coupling the mesh surface **760** to a supporting structure. By way of example only, the reflector **708** may be configured to have a width (from left to right in FIG. **22**) of about 642 millimeters, a height (from top to bottom in FIG. **22**) of about 505 millimeters, and be spaced apart from the antenna element **704** with a distance of about 200 millimeters separating the reflector's mesh surface **760** from the back surface of the antenna element **704**. Also, by way of example only, the perimeter flanges **764** may be about 23 millimeters long and extend outwardly at an angle of about 120 degrees from the mesh surface **760**. A wide range of material may be used for the reflector **708**. In one exemplary embodiment, the reflector **708** includes vinyl coated steel. Alternative embodiments may include a differently configured reflector (e.g., different material, shape, size, location, etc.), no reflector, or a reflector positioned closer or farther away from the antenna element.

FIG. **25** is an exemplary line graph showing computer-simulated directivity and VSWR (voltage standing wave ratio) versus frequency (in megahertz) for the antenna assembly **700** according to an exemplary embodiment.

Accordingly, embodiments of the present disclosure include antenna assemblies that may be scalable to any number of (one or more) antenna elements depending, for example, on the particular end-use, signals to be received or transmitted by the antenna assembly, and/or desired operating range for the antenna assembly. By way of example only, another exemplary embodiment of an antenna assembly includes four tapered loop antenna elements, which are collectively operable for improving the overall range of the antenna assembly.

Other embodiments relate to methods of making and/or using antenna assemblies. Various embodiments relate to methods of receiving digital television signals, such as high definition television signals within a frequency range of about 174 megahertz to about 216 megahertz and/or a frequency range of about 470 megahertz to about 690 megahertz. In one example embodiment, a method generally includes connecting at least one communication link from an antenna assembly to a television for communicating signals to the television that are received by the antenna assembly. In this method embodiment, the antenna assembly (e.g., **100**, etc.) may include at least one antenna element (e.g., **104**, etc.) and at least one reflector element (e.g., **108**, etc.). In some embodiments, there may be a free-standing antenna element without any reflector element, where the free-standing antenna element may provide good impedance bandwidth, but low directivity for very compact solutions that work in high signal areas. In another example, a method may include rotating a portion of a support (e.g., support **888**, etc.) to a first or a second configuration, where the support in the first configuration allows an antenna assembly to be supported on a horizontal surface and the support in the second configuration allows the antenna assembly to be supported on a vertical surface.

The antenna assembly may include a balun (e.g., **112**, etc.) and a housing (e.g., **116**, etc.). The antenna assembly may be operable for receiving high definition television signals having a frequency range of about 470 megahertz and about 690 megahertz. The antenna element may have a generally annular shape with an opening (e.g., **148**, etc.). The antenna element **104** (along with reflector size, baffle, and spacing) may be tuned to at least one electrical resonant frequency for operating within a bandwidth ranging from about 470 megahertz to about 690 megahertz. The reflector element may be spaced-apart from the antenna element for reflecting electromagnetic waves generally towards the antenna element and generally affecting impedance bandwidth and directionality. The antenna element may include spaced-apart first and second end portions (e.g., **128**, etc.), a middle portion (e.g., **126**, etc.), first and second curved portions (e.g., **150**, **152**, etc.) extending from the respective first and second end portions to the middle portion such that the antenna element's annular shape and opening are generally circular. The first and second curved portions may gradually increase in width from the respective first and second end portions to the middle portion such that the middle portion is wider than the first and second end portions and such that an outer diameter of the antenna element is offset from a diameter of the generally circular opening. The first curved portion may be a mirror image of the second curved portion. A center of the generally circular opening may be offset from a center of the generally circular annular shape of the antenna element. The reflector element may include a baffle (e.g., **164**, etc.) for deflecting electromagnetic waves. The baffle may be located at least partially along at least one perimeter edge portion of the reflector element. The reflector element may include a substantially planar surface (e.g., **160**, etc.) that is substantially parallel with the antenna element, and at least one sidewall portion (e.g., **164**, etc.) extending outwardly relative to the substantially planar surface generally towards the tapered loop antenna element. In some embodiments, the reflector element includes sidewall portions along perimeter edge portions of the reflector element, which are substantially perpendicular to the substantially planar surface of the reflector element, whereby the sidewall portions are operable as a baffle for deflecting electromagnetic wave energy.

Embodiments of an antenna assembly disclosed herein may be configured to provide one or more of the following advantages. For example, embodiments disclosed herein may provide antenna assemblies that are physically and electrically small but still capable of operating and behaving similar to physically larger and electrically larger antenna assemblies. Exemplary embodiments disclosed may provide antenna assemblies that are relatively small and unobtrusive, which may be used indoors for receiving signals (e.g., signals associated with digital television (of which high definition television signals are a subset), etc.). By way of further example, exemplary embodiments disclosed herein may be specifically configured for reception (e.g., tuned and/or targeted, etc.) for use with the year 2009 digital television (DTV) spectrum of frequencies (e.g., HDTV signals within a

first frequency range of about 174 megahertz and about 216 megahertz and signals within a second frequency range of about 470 megahertz and about 690 megahertz, etc.). Exemplary embodiments disclosed herein may thus be relatively highly efficient (e.g., about 90 percent, about 98 percent at 545 MHz, etc.) and have relatively good gain (e.g., about eight dBi maximum gain, excellent impedance curves, flat gain curves, relatively even gain across the 2009 DTV spectrum, relatively high gain with only about 25.4 centimeter by about 25.4 centimeter footprint, etc.). With such relatively good efficiency and gain, high quality television reception may be achieved without requiring or needing amplification of the signals received by some exemplary antenna embodiments. Additionally, or alternatively, exemplary embodiments may also be configured for receiving VHF and/or UHF signals.

Exemplary embodiments of antenna assemblies (e.g., **100**, **200**, etc.) have been disclosed herein as being used for reception of digital television signals, such as HDTV signals. Alternative embodiments, however, may include antenna elements tuned for receiving non-television signals and/or signals having frequencies not associated with HDTV. Other embodiments may be used for receiving AM/FM radio signals, UHF signals, VHF signals, etc. Thus, embodiments of the present disclosure should not be limited to receiving only television signals having a frequency or within a frequency range associated with digital television or HDTV. Antenna assemblies disclosed herein may alternatively be used in conjunction with any of a wide range of electronic devices, such as radios, computers, etc. Therefore, the scope of the present disclosure should not be limited to use with only televisions and signals associated with television.

Numerical dimensions and specific materials disclosed herein are provided for illustrative purposes only. The particular dimensions and specific materials disclosed herein are not intended to limit the scope of the present disclosure, as other embodiments may be sized differently, shaped differently, and/or be formed from different materials and/or processes depending, for example, on the particular application and intended end use.

Certain terminology is used herein for purposes of reference only, and thus is not intended to be limiting. For example, terms such as "upper", "lower", "above", "below", "upward", "downward", "forward", and "rearward" refer to directions in the drawings to which reference is made. Terms such as "front", "back", "rear", "bottom" and "side", describe the orientation of portions of the component within a consistent, but arbitrary, frame of reference which is made clear by reference to the text and the associated drawings describing the component under discussion. Such terminology may include the words specifically mentioned above, derivatives thereof, and words of similar import. Similarly, the terms "first", "second" and other such numerical terms referring to structures do not imply a sequence or order unless clearly indicated by the context.

When introducing elements or features and the exemplary embodiments, the articles "a", "an", "the" and "said" are intended to mean that there are one or more of such elements or features. The terms "comprising", "including" and "having" are intended to be inclusive and mean that there may be additional elements or features other than those specifically noted. It is further to be understood that the method steps, processes, and operations described herein are not to be construed as necessarily requiring their performance in the particular order discussed or illustrated, unless specifically identified as an order of performance. It is also to be understood that additional or alternative steps may be employed.

Disclosure of values and ranges of values for specific parameters (such frequency ranges, etc.) are not exclusive of other values and ranges of values useful herein. It is envisioned that two or more specific exemplified values for a given parameter may define endpoints for a range of values that may be claimed for the parameter. For example, if Parameter X is exemplified herein to have value A and also exemplified to have value Z, it is envisioned that parameter X may have a range of values from about A to about Z. Similarly, it is envisioned that disclosure of two or more ranges of values for a parameter (whether such ranges are nested, overlapping or distinct) subsume all possible combination of ranges for the value that might be claimed using endpoints of the disclosed ranges. For example, if parameter X is exemplified herein to have values in the range of 1-10, or 2-9, or 3-8, it is also envisioned that Parameter X may have other ranges of values including 1-9, 1-8, 1-3, 1-2, 2-10, 2-8, 2-3, 3-10, and 3-9.

The description of the disclosure is merely exemplary in nature and, thus, variations that do not depart from the gist of the disclosure are intended to be within the scope of the disclosure. Such variations are not to be regarded as a departure from the spirit and scope of the disclosure.

What is claimed is:

1. An antenna assembly comprising:

a tapered loop antenna element having a generally annular shape with an opening; and

a rotatably convertible support including a base and an upper portion coupled to the tapered loop antenna element, the upper portion rotatable relative to the base between a first configuration for supporting the tapered loop antenna element on a horizontal surface and a second configuration for supporting the tapered loop antenna element from a vertical surface;

wherein the rotatably convertible support is configured such that:

rotation of the upper portion relative to the base in a first direction converts the rotatably convertible support from the first configuration to the second configuration; and

rotation of the upper portion relative to the base in a second direction opposite the first direction converts the rotatably convertible support from the second configuration to the first configuration.

2. The antenna assembly of claim **1**, configured for operating within a bandwidth ranging from about 470 megahertz to about 690 megahertz, the tapered loop antenna element comprising:

spaced-apart first and second end portions;

a middle portion; and

first and second curved portions extending from the respective first and second end portions to the middle portion such that the tapered loop antenna element has a generally circular annular shape with a generally circular opening;

the first and second curved portions gradually increasing in width from the respective first and second end portions to the middle portion such that the middle portion is wider than the first and second end portions and such that an outer diameter of the tapered loop antenna element is offset from a diameter of the generally circular opening;

the first curved portion being a mirror image of the second curved portion.

3. The antenna assembly of claim **2**, wherein the outer diameter of the tapered loop antenna element is about two hundred twenty millimeters.

4. The antenna assembly of claim 2, wherein a midpoint of the diameter of the generally circular opening is spaced apart from a midpoint of the outer diameter of the tapered loop antenna element by about twenty millimeters.

5. The antenna assembly of claim 2, wherein a center of the generally circular opening is offset from a center of the generally circular annular shape.

6. The antenna assembly of claim 2, configured for operating within a second bandwidth ranging from about 174 megahertz to about 216 megahertz.

7. The antenna assembly of claim 1, further comprising a reflector element spaced-apart from the tapered loop antenna element and including a baffle for reflecting electromagnetic waves generally towards the tapered loop antenna element.

8. The antenna assembly of claim 1, wherein the rotatably convertible support includes a threaded stem portion and a threaded opening for receiving the threaded stem portion.

9. The antenna assembly of claim 8, wherein:

the threaded stem portion extends upwardly from the base; and

the threaded opening is defined by the upper portion.

10. The antenna assembly of claim 1, further comprising one or more stops for retaining the rotatably convertible support in the first configuration and/or second configuration.

11. The antenna assembly of claim 1 configured for operating within a bandwidth ranging from about 470 megahertz to about 690 megahertz, the tapered loop antenna element including:

spaced-apart end portions defining an open slot extending at least partially between the spaced-apart end portions, whereby the open slot is operable to provide a gap feed for use with a balanced transmission line; and

generally circular inner and outer perimeter portions such that the tapered loop antenna element's annular shape and opening are generally circular.

12. The antenna assembly of claim 11, wherein:

the generally circular outer perimeter portion has a diameter of about two hundred twenty millimeters; and/or

a center of the circle generally defined by the inner perimeter portion is about twenty millimeters below a center of the circle generally defined by the outer perimeter portion.

13. The antenna assembly of claim 11, wherein:

the tapered loop antenna element is configured such that a diameter of the generally circular inner perimeter portion is offset from a diameter of the generally circular outer perimeter portion; and

the offset diameters provide the tapered loop antenna element with at least one portion wider than at least one other portion.

14. The antenna assembly of claim 13, wherein a midpoint of the diameter associated with the generally circular inner perimeter portion is below a midpoint of the diameter associated with the generally circular outer perimeter portion such that the tapered loop antenna element has a wider upper portion.

15. The antenna assembly of claim 11, wherein:

the tapered loop antenna element increases in width from the spaced-apart end portions to a wider middle portion; and

the tapered loop antenna element is positioned in an orientation such that the wider middle portion is above the spaced-apart end portions and rotatably convertible support when supported from the vertical surface in the second configuration.

16. The antenna assembly of claim 11, further comprising a printed circuit board having a balun, and wherein the printed circuit board is attached to at least one of the spaced-apart end portions of the tapered loop antenna element.

17. The antenna assembly of claim 1, further comprising a digital tuner for converting digital signals received by the antenna assembly to analog signals.

18. The antenna assembly of claim 1, wherein the antenna assembly is tuned to a first electrical resonant frequency for operating within a first bandwidth ranging from about 470 megahertz to about 690 megahertz and is tuned to a second electrical resonant frequency for operating within a second bandwidth ranging from about 174 megahertz to about 216 megahertz.

19. The antenna assembly of claim 1, wherein the antenna assembly includes two of said tapered loop antenna elements positioned generally side-by-side in a generally figure eight configuration.

20. The antenna assembly of claim 1, further comprising a reflector element spaced-apart from the tapered loop antenna element for reflecting electromagnetic waves generally towards the tapered loop antenna element.

21. An antenna assembly comprising:

a tapered loop antenna element having a generally annular shape with an opening;

a rotatably convertible support including a base and an upper portion coupled to the tapered loop antenna element, the upper portion rotatable relative to the base between a first configuration for supporting the tapered loop antenna element on a horizontal surface and a second configuration for supporting the tapered loop antenna element from a vertical surface;

one or more stops for retaining the rotatably convertible support in the first configuration and/or second configuration;

wherein:

the one or more stops include first and second stops configured to be engagingly received within first and second openings, respectively, for retaining the rotatably convertible support in the corresponding first or second configuration;

the engagement of the first stop within the first opening inhibits relative rotation of the upper portion and the base thus helping retain the rotatably convertible support in the first configuration; and

the engagement of the second stop within the second opening inhibits relative rotation of the upper portion and the base thus helping retain the rotatably convertible support in the second configuration.

22. The antenna assembly of claim 21, wherein:

the upper portion includes the first and second stops; and

the base includes the first and second openings.

23. The antenna assembly of claim 21, wherein the first and second stops includes one or more of a projection, nub, protrusion, and/or protuberance.

24. The antenna assembly of claim 21, wherein the one or more stops are configured to provide a tactile and/or audible indication to a user to stop rotating the upper portion relative to the base when the first and second stop is engaged into the corresponding first or second opening.

* * * * *